

## Important Information

### Precautions

Please read this manual carefully before using your NEC PlasmaSync 42PD1 42inch Plasma Monitor and keep the manual handy for future reference.

**CAUTION****RISK OF ELECTRIC SHOCK  
DO NOT OPEN**

**CAUTION:** TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER. NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

 This symbol warns the user that uninsulated voltage within the unit may have sufficient magnitude to cause electric shock. Therefore, it is dangerous to make any kind of contact with any part inside of this unit.

 This symbol alerts the user that important literature concerning the operation and maintenance of this unit has been included. Therefore, it should be read carefully in order to avoid any problems.

**WARNING**

TO PREVENT FIRE OR SHOCK HAZARDS, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE. ALSO DO NOT USE THIS UNIT'S POLARIZED PLUG WITH AN EXTENSION CORD RECEPTACLE OR OTHER OUTLETS, UNLESS THE PRONGS CAN BE FULLY INSERTED. REFRAIN FROM OPENING THE CABINET AS THERE ARE HIGH-VOLTAGE COMPONENTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

### DOC compliance Notice

This Class A digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

### WARNING

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### Warnings and Safety Precaution

The NEC PlasmaSync 42PD1 is designed and manufactured to provide long, trouble-free service. No maintenance other than cleaning is required. Use a soft dry cloth to clean the panel. Never use solvents such as alcohol or thinner to clean the panel surface.

The plasma display panel consists of fine picture elements (cells). Although NEC produces the plasma display panels with more than 99.99 percent active cells, there may be some cells that do not produce light or remain lit.

For operating safety and to avoid damage to the unit, read carefully and observe the following instructions. To avoid shock and fire hazards:


1. Provide adequate space for ventilation to avoid internal heat build-up. Do not cover rear vents or install in a closed cabinet or shelves.  
The unit is equipped with cooling fans. If you install the unit in an enclosure, be sure there is adequate space at the top of the unit to allow hot air to rise and escape. If the monitor becomes too hot, the overheat protector will be activated and the monitor will be turned off. If this happens, turn off the power to the monitor and unplug the power cord. If the room where the monitor is installed is particularly hot, move the monitor to a cooler location, and wait for the monitor to cool for 60 minutes. If the problem persists, contact your NEC dealer for service.
2. Do not use the power cord polarized plug with extension cords or outlets unless the prongs can be completely inserted.
3. Do not expose unit to water or moisture.
4. Avoid damage to the power cord, and do not attempt to modify the power cord.
5. Unplug unit during electrical storms or if unit will not be used over a long period.
6. Do not open the cabinet which has potentially dangerous high voltage components inside. If the unit is damaged in this way the warranty will be void. Moreover, there is a serious risk of electric shock.
7. Do not attempt to service or repair the unit. NEC is not liable for any bodily harm or damage caused if unqualified persons attempt service or open the back cover. Refer all service to authorized NEC Service Centers.
8. Do not attempt to install or mount the unit yourself. Please contact your NEC dealer for installation.

**NOTE:**

When you connect a computer to this monitor, attach the supplied ferrite cores. If you do not do this, this monitor will not conform to mandatory FCC standards. Attaching the ferrite cores.

Set the ferrite cores on the both ends of the DVI cable (not supplied), and the one end of the power cable (supplied).

Close the lid tightly until the clamps click.

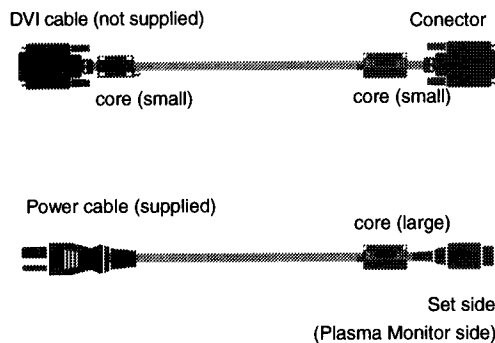

To avoid damage and prolong operating life:

1. Use only with 120V 50/60Hz AC power supply. Continued operation at line voltages greater than 120 Volts AC will shorten the life of the unit, and might even cause a fire hazard.
2. Handle the unit carefully when installing it and do not drop.
3. Locate set away from heat, excessive dust, and direct sunlight.
4. Protect the inside of the unit from liquids and small metal objects. In case of accident, unplug the unit and have it serviced by an authorized NEC Service Center.
5. Do not hit or scratch the panel surface as this causes flaws on the surface of the screen.
6. As is the case with any phosphor-based display (like a CRT monitor, for example) light output will gradually decrease over the life of a Plasma Display Panel.

Recommendations to avoid or minimize phosphor burn-in

Like all phosphor-based display devices and all other gas plasma displays, PlasmaSync monitors can be susceptible to phosphor burn under certain circumstances. Certain operating conditions, such as the continuous display of a static image over a prolonged period of time, can result in phosphor burn if proper precautions are not taken. To protect your investment in this NEC PlasmaSync monitor, please adhere to the following guidelines and recommendations for minimizing the occurrence of image burn:

- \* Always enable and use your computer's screen saver function during use with a computer input source.
- \* Display a moving image whenever possible.
- \* Always power down the monitor when you are finished using it.

If the PlasmaSync monitor is in long term use or continuous operation take the following measures to reduce the likelihood of phosphor burn:

- \* Lower the Brightness and Contrast levels as much as possible without impairing image readability.
- \* Display an image with many colors and color gradations (ie. photographic or photo-realistic images).
- \* Create image content with minimal contrast between light and dark areas, for example white characters on black backgrounds. Use complementary or pastel color whenever possible.
- \* Avoid displaying images with few colors and distinct, sharply defined borders between colors.

Contact NEC Technologies at 1-800-836-0655 for other recommended procedures that will best suit your particular application needs.

## Précautions

Veuillez lire ce manuel avec attention avant d'utiliser votre PlasmaSync 42PD1 NEC - Moniteur Plasma 42 pouces et conserver ce manuel à portée de la main pour une consultation ultérieure.

**ATTENTION**



**RISQUE D'ELECTROCUTION  
NE PAS OUVRIR**



MISE EN GARDE: AFIN DE REDUIRE LES RISQUES D'ELECTROCUTION, NE PAS DEPOSER LE COUVERCLE, IL N'Y A AUCUNE PIECE UTILISABLE A L'INTERIEUR DE CET APPAREIL. NE CONFIER LES TRAVAUX D'ENTRETIEN QU'A UN PERSONNEL QUALIFIE.



Ce symbole a pour but de prévenir l'utilisateur de la présence d'une tension dangereuse, non isolée se trouvant à l'intérieur de l'appareil. Elle est d'une intensité suffisante pour constituer un risque d'électrocution. Eviter le contact avec les pièces à l'intérieur de cet appareil.



Ce symbole a pour but de prévenir l'utilisateur de la présence d'importantes instructions concernant l'entretien et le fonctionnement de cet appareil. Par conséquent, elles doivent être lues attentivement afin d'éviter des problèmes.

**AVERTISSEMENT**

AFIN DE REDUIRE LES RISQUES D'INCENDIE OU D'ELECTROCUTION, NE PAS EXPOSER CET APPAREIL A LA PLUIE OU A L'HUMIDITE. AUSSI, NE PAS UTILISER LA FICHE POLARISEE AVEC UN PROLONGATEUR OU UNE AUTRE PRISE DE COURANT SAUF SI CES LAMES PEUVENT ETRE INSEREES A FOND. NE PAS OUVRIR LE COFFRET, DES COMPOSANTS HAUTE TENSION SE TROUVENT A L'INTERIEUR. LAISSER A UN PERSONNEL QUALIFIE LE SOIN DE REPARER CET APPAREIL.

## DOC avis de conformation

Cet appareil numérique de la classe A respecte toutes les exigences du Règlement sur le Matériel Brouilleur du Canada.

## AVERTISSEMENT

Cet équipement a été testé et certifié conforme avec les limitations des équipements numériques de Classe A, conformément à l'article 8 (du règlement FCC. Ces limites sont conçues pour assurer une protection raisonnable contre les interférences nuisibles lorsque l'équipement est utilisé en milieu commercial. Cet équipement génère, utilise, et peut produire de l'énergie de fréquence radio et, s'il n'est pas installé et utilisé selon le manuel d'instruction, peut provoquer des interférences nuisibles aux communications radio. L'utilisation de cet équipement dans une zone résidentielle est susceptible de provoquer des interférences nuisibles, dans quel cas l'utilisateur est tenu de remédier à ces interférences à ses frais.

## Mises en garde et précautions de sécurité

Le moniteur multimédia NEC PlasmaSync 42PD1 a été conçu et fabriqué pour une utilisation fiable et durable. Il ne nécessite aucun entretien en dehors du nettoyage. Utiliser un chiffon doux et sec pour nettoyer la surface de l'écran. Ne jamais utiliser de solvant comme l'alcool ou le diluant. Le panneau à affichage plasma est constitué de fines particules d'images ou pixels (cellules). Bien que NEC produise des panneaux à affichage plasma avec plus de 99,99 % de cellules actives, il peut y avoir des cellules qui ne produisent pas de lumière ou qui restent allumées. Pour des raisons de sécurité et pour éviter d'endommager l'appareil, lire attentivement les instructions suivantes.

Pour éviter les risques d'électrocution et d'incendie:

1. Laisser suffisamment d'espace autour de l'appareil pour la ventilation et éviter toute augmentation excessive de la température interne. Ne pas couvrir les événements ou l'installer dans un endroit trop exigü. L'appareil est équipé de ventilateurs de refroidissement. Si vous installez l'appareil dans un espace clos, assurez-vous qu'il y ait suffisamment d'espace au dessus pour permettre à l'air chaud de s'élever et de s'évacuer. Si la température du moniteur devient excessive, la protection contre les surchauffes entrera en action et coupera l'alimentation. Dans ce cas, éteindre l'appareil et débrancher le câble d'alimentation. Si la température de la pièce dans laquelle le moniteur est installé est particulièrement excessive, déplacer l'appareil dans un endroit plus frais et le laisser refroidir 60 minutes. Si le problème persiste, prendre contact avec le revendeur NEC pour le service après-vente.
2. Ne pas utiliser la fiche polarisée du cordon d'alimentation avec des prolongateurs ou des prises de courant, sauf si les lames peuvent être insérées à fond.
3. Ne pas exposer à l'eau ou à l'humidité.
4. Eviter d'endommager le cordon d'alimentation, et ne pas modifier le cordon d'alimentation.
5. Débrancher l'appareil pendant les tempêtes ou si l'appareil n'est pas utilisé pendant une longue période.
6. Ne pas ouvrir le coffret. Des composants de haute tension se trouvent à l'intérieur. Si l'appareil est endommagé de cette manière, la garantie devient caduque. De plus, il y a risque d'électrocution.
7. Ne pas essayer de réparer ou entretenir l'appareil soi-même. NEC ne saura être tenu pour responsable pour toute blessure ou dommage causé par des personnes non qualifiées qui essaient de réparer ou d'ouvrir le couvercle arrière. Confier toute réparation à un centre de service agréé NEC.
8. N'essayez pas d'installer ou d'assembler l'appareil vous-mêmes. Veuillez contacter votre revendeur NEC pour l'installation.


**REMARQUE:**

Lorsque vous branchez un micro-ordinateur sur ce moniteur, fixez les noyaux en ferrites fournis. Si vous ne le faites, le moniteur ne sera pas en conformité avec les exigences des standards FCC.

Fixation des noyaux en ferrite.

Installez les noyaux en ferrite sur chaque bout du câble DVI (non fourni), ainsi que sur un côté du câble d'alimentation électrique (fourni).

Fermez doucement le couvercle jusqu'à ce que les crans se clipsent.

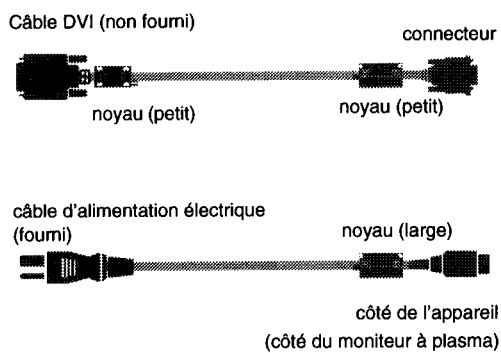

Pour éviter des dommages et prolonger la durée de service de l'appareil:

1. N'utiliser qu'une source d'alimentation de 120 V 50/60 Hz CA. Le fait d'utiliser l'appareil en continu à des tensions de ligne supérieures à 120 Volts CA réduit sa durée de vie et risque de provoquer un incendie.
2. Manipuler l'appareil avec soin pendant son déplacement et ne pas le faire tomber.
3. Eloigner l'appareil des endroits chauds, très poussiéreux et exposés en plein soleil.
4. Eviter que des liquides et des petits objets métalliques pénètrent à l'intérieur de l'appareil. En cas d'accident, débrancher l'appareil et le confier à un centre de service agréé NEC.
5. Ne pas frapper ou rayer la surface de la écran plasma, car des défauts risquent de se produire sur la surface de la écran plasma.
6. Comme c'est le cas pour tout affichage à base de phosphore (comme un moniteur CRT, par exemple), la puissance de lumière baisse graduellement au cours de la vie du Panneau d'Affichage à Plasma.

Pour éviter le risque de combustion au phosphore, les mesures suivantes sont recommandées :

Comme tous les appareils d'affichage à base de phosphore et tous les autres affichages à gaz plasma, les moniteurs Plasmasync peuvent être sujets à la combustion au phosphore dans certaines circonstances. Certaines conditions d'utilisation, telles que l'affichage continu d'une image statique pour une durée prolongée, peuvent causer des brûlures au phosphore si aucune précaution n'est prise. Pour protéger votre investissement dans ce moniteur PlasmaSync NEC, veuillez suivre les directives et les recommandations suivantes pour minimiser l'occurrence de brûlure d'image :

- Assurez-vous de mettre en marche et d'utiliser l'économiseur d'écran chaque fois que c'est possible lorsque vous l'utilisez avec une source d'entrée d'ordinateur.
- Affichez une image en mouvement aussi souvent que possible.
- Coupez toujours l'alimentation lorsque vous avez terminé d'utiliser la moniteur.

Si le PlasmaSync 4210W est en usage continu ou longue durée, prenez les mesures suivantes afin d'éviter l'occurrence de combustion au phosphore :

- Abaissez le niveau de l'image (contraste, luminosité) autant que possible, sans faire perdre la lisibilité de l'image.
- Affichez une image avec de nombreuses couleurs et graduations de couleur (par ex. des images photographiques ou photo-réalistes).
- Créez un contenu d'image avec un contraste minimal entre les zones sombres et les zones claires, par exemple, des caractères blancs sur un fond noir. Utilisez des couleurs complémentaires ou pastels le plus souvent possible.
- Évitez d'afficher des images avec peu de couleurs et des limites nettes et clairement définies entre les couleurs.

Contactez NEC Technologies au 1-800-836-0655 pour d'autres procédures recommandées qui conviendront le mieux au besoin de votre appareil.

# Limited Warranty Plasma Monitors

NEC Technologies, Inc. (hereinafter NECTECH) warrants this product to be free from defects in material and workmanship under the following terms and, subject to the conditions set forth below, agrees to repair or replace (at NECTECH's sole option) any part of the enclosed unit which proves defective. Replacement parts or products may be new or refurbished and will meet specifications of the original parts or product.

## HOW LONG IS THE WARRANTY?

Parts and labor are warranted for (1) One Year from the date of the first customer purchase.

## WHO IS PROTECTED?

This warranty may be enforced only by the first purchaser.

## WHAT IS COVERED AND WHAT IS NOT COVERED

Except as specified below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed in the U.S.A. or Canada and Mexico by NECTECH or which is not purchased in the U.S.A. or Canada or Mexico from an authorized NECTECH dealer.
2. Any product on which the serial number has been defaced, modified or removed.
3. Damage, deterioration or malfunction resulting from:
  - a. Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
  - b. Repair or attempted repair by anyone not authorized by NECTECH.
  - c. Any shipment of the product (claims must be presented to the carrier).
  - d. Removal or installation of the product.
  - e. Any other cause which does not relate to a product defect.
  - f. Burns or residual images upon the phosphor of the panel.
4. Cartons, carrying cases, batteries, external cabinets, magnetic tapes, or any accessories used in connection with the product.
5. Service outside of the U.S.A. and Canada.

## WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items, but we will not pay for the following:

1. Removal or installation charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls. These costs are the responsibility of the NECTECH dealer from whom the product was purchased.
3. Payment of shipping charges.

## HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on your product, consult the dealer from whom you purchased the product.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage. Please also include in any mailing your name, address and a description of the problem(s).
3. For the name of the nearest NECTECH authorized service center, call NECTECH at 800-836-0655.

## LIMITATIONS OF LIABILITY

Except for the obligations specifically set forth in this warranty statement, we will not be liable for any direct, indirect, special, incidental, consequential, or other types of damages, whether based on contract, tort, or any other legal theory, whether or not we have been advised of the possibility of such damages.

This warranty is in lieu of all other warranties express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose.

## EXCLUSION OF DAMAGES

NECTECH's liability for any defective product is limited to the repair or replacement of the product at our option. NECTECH shall not be liable for:

1. Damage to other property caused by any defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or
2. Any other damages whether incidental, consequential or otherwise. Some states do not allow limitation on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

## HOW STATE LAW RELATES TO THE WARRANTY

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

FOR MORE INFORMATION, TELEPHONE 800-836-0655

NEC TECHNOLOGIES, INC.  
1250 N. Arlington Heights Road, Suite 500  
Itasca, Illinois 60143-1248

**Note:** All products returned to NECTECH for service MUST have prior approval. To get approval, call NEC Technologies at 800-836-0655.

# Contents

|                                                                                         |           |
|-----------------------------------------------------------------------------------------|-----------|
| <b>How to Attach Options to the Plasma Monitor .....</b>                                | <b>8</b>  |
| <b>Introduction</b>                                                                     |           |
| Introduction to the PlasmaSync 42PD1 .....                                              | 9         |
| The features you'll enjoy include .....                                                 | 9         |
| Contents of the Package .....                                                           | 9         |
| OPTIONS .....                                                                           | 9         |
| <b>Setup Procedure .....</b>                                                            | <b>10</b> |
| <b>Part Names and Functions</b>                                                         |           |
| Front View .....                                                                        | 12        |
| Side View Terminal Board L/R .....                                                      | 13        |
| Remote Controller .....                                                                 | 14        |
| Battery Installation and Replacement .....                                              | 15        |
| Operating Range / Using the wired remote control mode .....                             | 16        |
| <b>Making the DIP Switch Settings</b>                                                   |           |
| DIP Switch Functions and Settings .....                                                 | 17        |
| Power Management Function .....                                                         | 18        |
| Power Management Modes .....                                                            | 18        |
| <b>Installation</b>                                                                     |           |
| Wiring Diagram .....                                                                    | 19        |
| Connecting Your PC or Macintosh Computer .....                                          | 20        |
| Connections with Equipment that has a Digital Interface .....                           | 20        |
| Connecting Your VCR or Laser Disc Player .....                                          | 20        |
| Connecting Your Document Camera .....                                                   | 20        |
| Daisy-chaining Your monitors .....                                                      | 21        |
| <b>Operation</b>                                                                        |           |
| Power/General Controls/Adjustment of the Display .....                                  | 22        |
| Adjustment of the Display (Direct) .....                                                | 23        |
| Returning the Screen Adjustment to the Factory Default Settings (NORMAL) .....          | 23        |
| Adjustment of the Image .....                                                           | 24        |
| Returning the Image Adjustments to the Factory Default Settings (NORMAL) .....          | 24        |
| <b>Adjustment of the Display (Menu Control)</b>                                         |           |
| List of Setting Details .....                                                           | 25        |
| Before Making Adjustments .....                                                         | 26        |
| To Reset the Adjustment Value (to the Factory Default Setting) During the Setting ..... | 27        |
| Adjustment of the Image (Visual Controls) .....                                         | 29        |
| Adjustment of Screen Position (Horizontal) .....                                        | 30        |
| Adjustment of Screen Position (Vertical) .....                                          | 31        |
| Color Temperature .....                                                                 | 32        |
| Adjustment of the White Balance .....                                                   | 33        |
| Adjustment of the On-screen Display Position .....                                      | 34        |
| Setting the On-screen Display OFF Time .....                                            | 35        |
| Adjustment of the Clock Frequency/Clock Phase (AUTO PICTURE) .....                      | 36        |
| Normal Screen .....                                                                     | 37        |
| Next Page Screen .....                                                                  | 38        |
| Information Screen .....                                                                | 39        |
| Timer Screen .....                                                                      | 40        |
| Auto Timer Screen .....                                                                 | 41        |
| Multiple Screens .....                                                                  | 43        |
| Other Setting Screens (1) .....                                                         | 44        |
| Other Setting Screens (2) .....                                                         | 45        |
| Set Selection Screen for Allotting ID Numbers to Multiple Screens/Each Set .....        | 46        |
| <b>Troubleshooting .....</b>                                                            | <b>47</b> |
| <b>Specifications .....</b>                                                             | <b>48</b> |
| <b>Appendix</b>                                                                         |           |
| Signal Identification For Raster Preset .....                                           | 49        |
| Pin Configuration and Signal Level of mini D-Sub 15-Pin (Analog) Input Connector .....  | 50        |
| Pin Configuration and Signal of the RGB 3 IN Connector (DVI Connector) .....            | 50        |
| Function and Pin Configuration of the External Control Connector .....                  | 51        |
| <b>Cabinet dimensions .....</b>                                                         | <b>62</b> |


# How to Attach Options to the Plasma Monitor

You can attach your optional mounts or stand to the plasma monitor in one of the following two ways:


- \* In the upright position. (See Drawing A)
- \* Lay the screen face down (See Drawing B). Lay the protective sheet, which was wrapped around the monitor when it was packaged, beneath the screen surface so as not to scratch the screen face.

- **This device cannot be installed on its own. Be sure to use a stand or optional mounting unit. (Wall mount unit, Stand, etc)**  
\* See page 2.
- **For correct installation and mounting it is strongly recommended to use a trained, authorized NEC dealer.**  
**Failure to follow correct mounting procedures could result in damage to the equipment or injury to the installer.**  
**Product warranty does not cover damage caused by improper installation.**

Drawing A

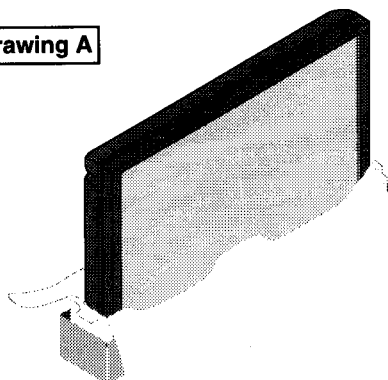

Drawing B

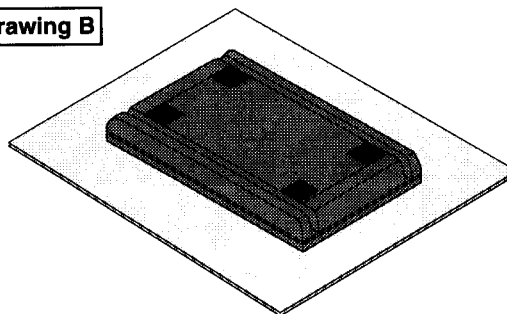

## Ventilation Requirements for enclosure mounting

To allow heat to disperse, leave space between surrounding objects as shown on the diagram below when installing.

## Pulling Out and Reinserting the Retractable Stand

Retractable Stand are housed at 2 locations on the bottom surface of the main unit.

1. Grasp the end and pull out.
2. The stand will open automatically when your hand is removed.



To house the Retractable Stand, close them and then continue to push them inside the main unit.

### Notice:

- \* Installation of only the main unit is not possible. Be sure to use and install the main unit in conjunction with a stand or special unit.

### Note:

The retractable stand housed within the cabinet of the monitor are for TEMPORARY USE ONLY. These are intended to support the unit during setup procedures prior to permanent installation on a tabletop stand or wall mount. These feet will enable the unit to stand but they are intended for temporary use and WILL NOT SUPPORT THE MONITOR FOR PERMANENT INSTALLATION. You must use the tabletop stand or wall mount options for permanent installation and use of the monitor.

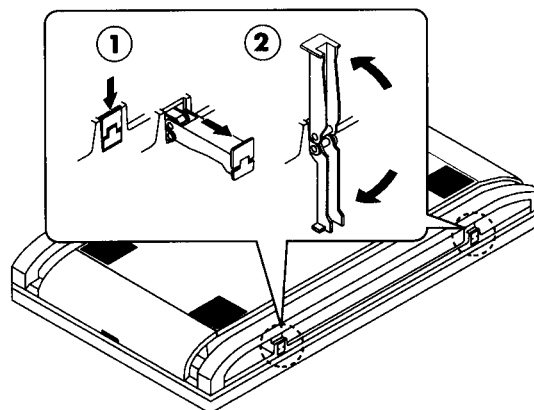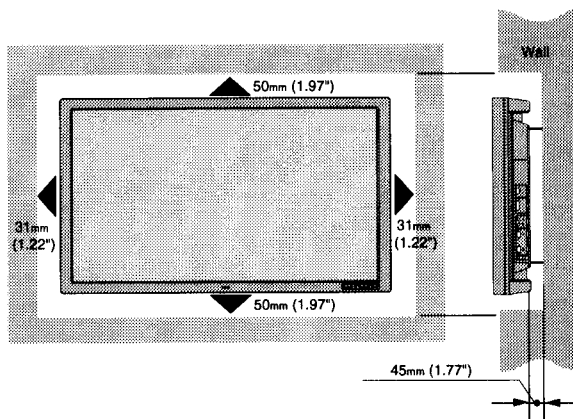

# Introduction

OSM and IPM are trademarks of NEC Technologies, Inc. IBM PC/AT, PS/2, VGA, S-VGA, 8514/A and XGA are registered trademarks of International Business Machines Corporation.

Apple and Macintosh are registered trademarks of Apple Computer, Inc.

Microsoft is a registered trademark of Microsoft Corporation. Windows is a trademark of Microsoft Corporation.

TMDS is a registered trademark of Silicon Image .Inc.

## Introduction to the PlasmaSync 42PD1

This section introduces you to your new PlasmaSync 42PD1, provides a list of materials that comes with your monitor and describes the features and controls.

### The features you'll enjoy include:

- \* This unit can be used with IBM PC/AT compatible, Macintosh, and compatibles.  
(For details, see "Factory Setting Values Preset Table.")
- \* Easy-to-operate multifunction remote control and external control connector  
A single remote control can be used as a wireless or as a wired remote control (with automatic switching by cable connection) and the remote THROUGH OUT connector permits simultaneous operation of multiple monitors.  
(A maximum of 3 units can be connected.)  
The external control connector with a THROUGH OUT feature permits various control functions to be made externally.
- \* ID No. settings can be made for up to 256 units.
- \* NTSC, PAL, SECAM, and M-NTSC composite video signals can be accommodated  
Video signals from video cameras, video decks, video disc players, and other video equipment adhering to NTSC as well as PAL, SECAM, and M-NTSC (with a 4.43 MHz chroma signal) standards can be selected on screen.
- \* Varied set of input connectors  
Video input signals: BNC video connector, S video connector. Each type is equipped with its own THROUGH OUT connector, single system.  
Analog RGB input: mini D-Sub 15-pin connector, BNC (R, G, B, H/CS, V connectors). BNC is equipped with its own THROUGH OUT connector, single system.
- \* Can be used with Digital RGB input (DVI standard compliant)
- \* Can be used with multiple screens
- \* Power management function  
RGB3 input mode complies with DMPM (Digital Monitor Power Management) of DVI.  
A great reduction in power consumption when not being used is achieved through the VESA-proposed DPMS system.

The unit can also be used with the Energy Star standard (in which case power consumption will be 15 W or less when not being used).

- \* The personal computer and the operating system that are to be connected must be compatible with VESA DPMS. Personal computers that are to be connected to the RGB3 input must be compatible with DVI DMPM.
- \* OSM (On Screen Manager) function  
The OSM function displays a variety of screen adjustment and correction menus on the screen to allow fine settings to be made.
- \* Plug and Play compatible  
The RGB3 input is compatible with DDC2B only.  
Ready to be used with Plug and Play which are supported by Windows 98 and Windows 95.  
(VESA DDC1 and DDC2 level B)
- \* Windows 98 or Windows 95 and a personal computer with VESA DDC are required to use Plug and Play.
- \* Can be used with RS-232C

## Contents of the Package

The following lists all of the items included in your MultiSync multimedia monitor package. Please save the original box and packing materials for future transportation or shipment of this monitor.

1. PlasmaSync 42PD1
2. Power cord
3. Wireless/Wired remote control unit and two AAA batteries
4. Remote cable
5. RGB cable (15-Pin mini D-Sub To 15-pin mini D-Sub Connector)
6. User's manual
7. Core (large) and two cores (small)

# Setup Procedure

---

## 1. Determine the installation location

- \* To ensure safe use, see “Before Use” and “Observe the Following,” then install properly.

## 2. Connect the equipment

- Set the termination switch (75Ω/high impedance).
- Set the DIP switches to suit the application and system structure. (See Page 17.)
- (Loop-out connections are for one unit, maximum.)

## 3. Install the remote control batteries.

- \* To use the remote control in the wired arrangement, connect the supplied remote control cable.

## 4. Connect the supplied power cable

- \* The maximum current rating 5.6(A)

## 5. Switch on the power of each of the devices

- \* When connected with a computer, switch on the power of the computer first.

## 6. Input an analog RGB signal or a video signal to this unit

## 7. Select the input mode

- \* Select the appropriate RGB input or video input.

## 8. Adjust the screen

- \* Make adjustments when adjustment of the screen display position or distortion is required.

## 9. Adjust the image

- \* Make adjustments when adjustment of the tint, brightness, or contrast is required.

## Warning

For proper installation and mounting it is strongly recommended to use a trained, authorized NEC dealer. Failure to follow correct mounting procedures could result in damage to the unit or injury to the installer. Product warranty does not cover damage caused by improper installation.

## Notice:


This monitor requires the use of a tabletop stand or wall mount unit for permanent installation and use. This monitor cannot be used without one of these accessories.

## Note:

The retractable stand housed within the cabinet of the monitor are for TEMPORARY USE ONLY. These are intended to support the unit during setup procedures prior to permanent installation on a tabletop stand or wall mount. These feet will enable the unit to stand but they are intended for temporary use and WILL NOT SUPPORT THE MONITOR FOR PERMANENT INSTALLATION. You must use the tabletop stand or wall mount options for permanent installation and use of the monitor.

### Opening the Terminal Board Cover


Slide the knob and at the same time lift the cover.

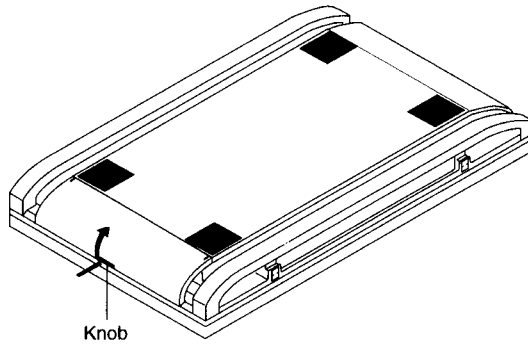

### Attaching the Remote Control Holder

Insert the top hook of the remote control holder into the installation hole of the main unit and then insert the bottom hook into its respective hole.

To remove the remote control holder, first release the bottom hook, then release the top hook.

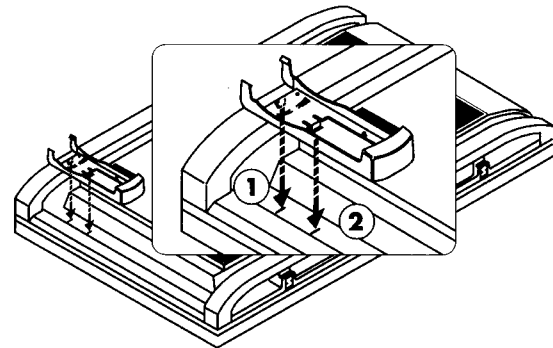


### Removing the Terminal Board Cover

This unit's terminal board cover can be removed.

First, open the cover and then:

1. Pull the top hook in the direction of the arrow.
2. Pull the entire terminal board cover downward.


To attach the terminal board cover, insert the bottom hook into the hole, then pull the top hook and insert it into the hole.

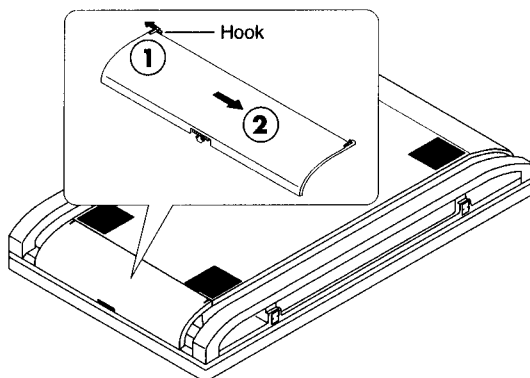

### Housing the Remote Control in the Remote Control Holder


First insert the bottom part of the remote control and continue to push it in until the top part clicks into place.

To remove, lift the remote control up from the top part and remove it from the holder.

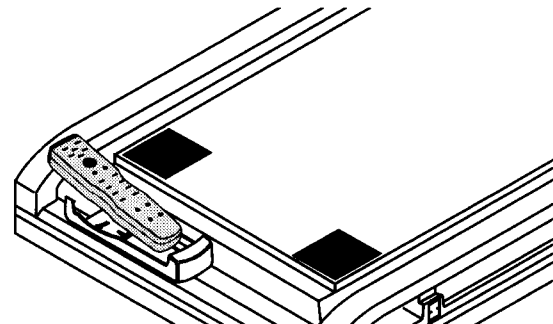

# Part Names and Functions

## Front View

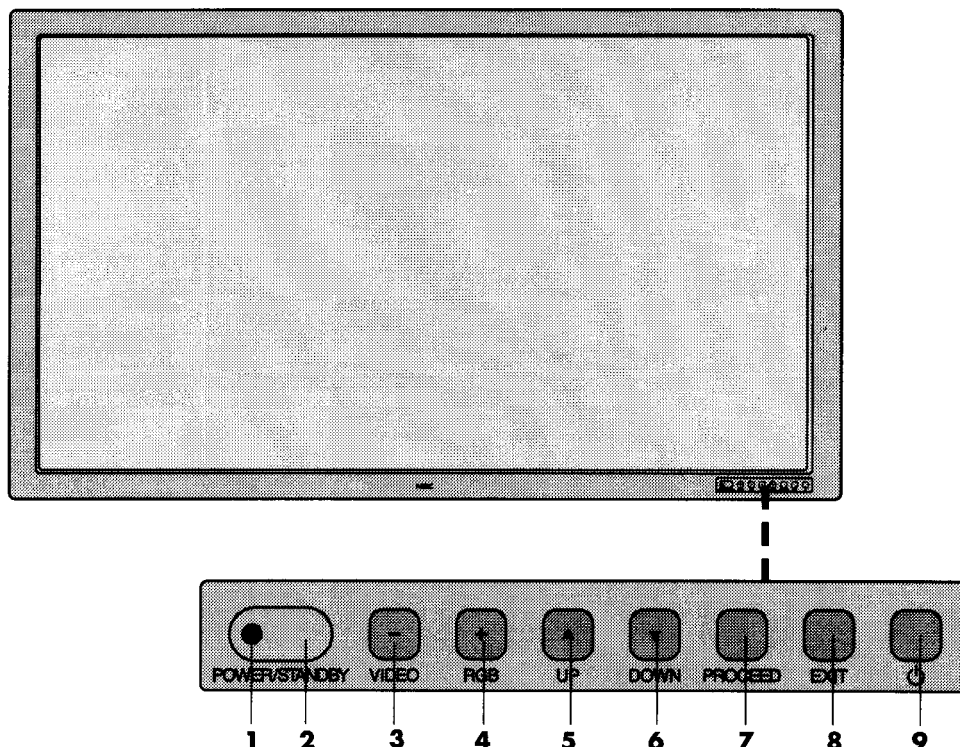

### 1 POWER/STANDBY

The lamp color indicates the mode of power on/standby or power management.

### 2 Remote control sensor

Receives the signal from the remote control (when using the wireless remote control).

### 3 VIDEO button

Switches to the signal connected with the VIDEO input connector.

Functions as the (-) button in the on-screen display (OSM) mode.

### 4 RGB button

Switches to the signal connected with the RGB input connector. (Toggle switches between RGB1/RGB2/RGB3.)

Functions as the (+) button in the on-screen display (OSM) mode.

### 5 UP button

Functions as the (▲) button in the on-screen display (OSM) mode.

### 6 DOWN button

Functions as the (▼) button in the on-screen display (OSM) mode.

### 7 PROCEED button

Sets the on-screen display (OSM) mode and displays the on-screen menu.


### 8 EXIT button

Exits the on-screen display (OSM) mode.

### 9 POWER button

Switches the main power on/off.

## Side View.... Terminal Board L/R

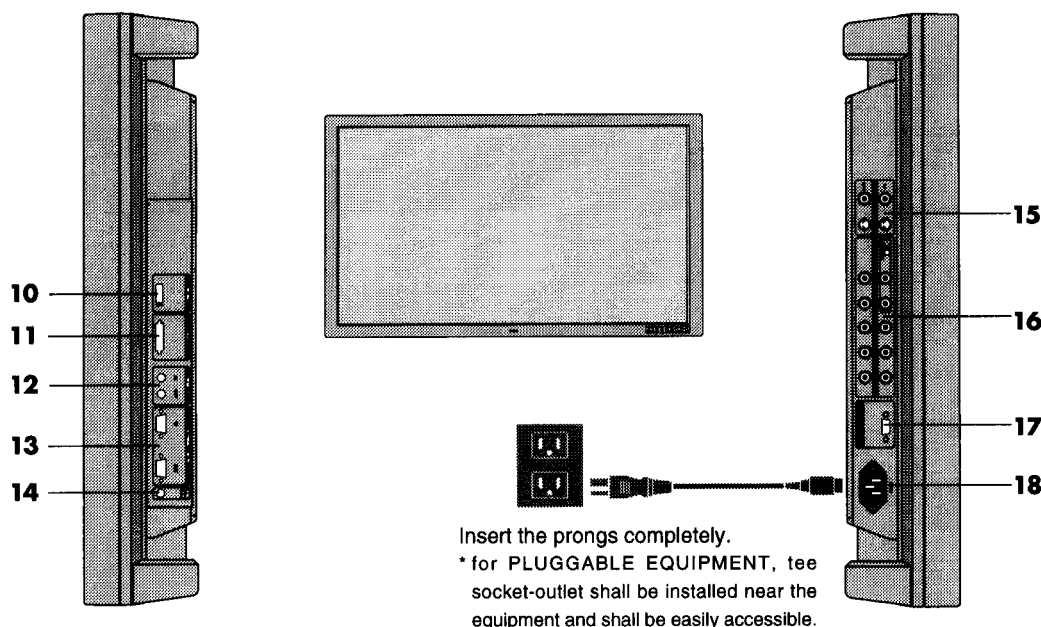

Insert the prongs completely.

\* for PLUGGABLE EQUIPMENT, tee socket-outlet shall be installed near the equipment and shall be easily accessible.

### 10 DIP SW

Sets the various modes of this unit.

### 11 RGB3 (DVI 29pin)

IN connector: Inputs a digital RGB signal. (TMDS)

**Notes:** This connector does not support analog input.

### 12 REMOTE (Mini jack)

**IN jack:** This jack connects the wired remote control.  
**THROUGH OUT jack:** Outputs as is the remote control signal that is connected to the REMOTE IN jack.

\* This is used when operating multiple monitors (i.e., of this unit) with a single remote control.

### 13 EXTERNAL CONTROL (mini D-Sub 15 pin)

Controlled by the computer's RS-232C interface.

**IN connector:** Used when operating this unit with EXTERNAL CONTROL from a personal computer.

**THROUGH OUT connector:** Outputs as is the signal that is input to the EXTERNAL CONTROL IN connector.

### 14 CONTROL LOCK

When "CONTROL LOCK" is set to "ON", the buttons on the set's control panel do not function.

### 15 VIDEO

**IN [BNC] connector (BNC):** Inputs the video (composite video signal).

**IN [S] connector (DIN 4 pin):** Inputs the S video (Y/C separate signal).

\* When connections are made to both the BNC connector and the S video connector, the signal of the S video connector has priority.

**THROUGH OUT [BNC] connector (BNC):** Outputs as is the signal that is input to the VIDEO IN [BNC] connector.

**THROUGH OUT [S] connector (DIN 4 pin):** Outputs as is the signal that is input to the VIDEO IN [S] connector.

### 16 RGB2 [R, G, B, H/CS, V] (BNC)

**IN connector:** Inputs the analog RGB signal.

The H/V composite signal is connected to the H/CS connector.

**THROUGH OUT connector:** Outputs as is the signal input to the RGB2 IN connector.

**75Ω/HIGH switch:** This switch selects the impedance of the connector. It is usually used in the "75Ω" position.


### 17 RGB1 (mini D-Sub 15 pin)

**IN connector:** Inputs the analog RGB signal of a personal computer, etc.

### 18 AC IN connector

Connects with the supplied power cable.

# Remote Controller

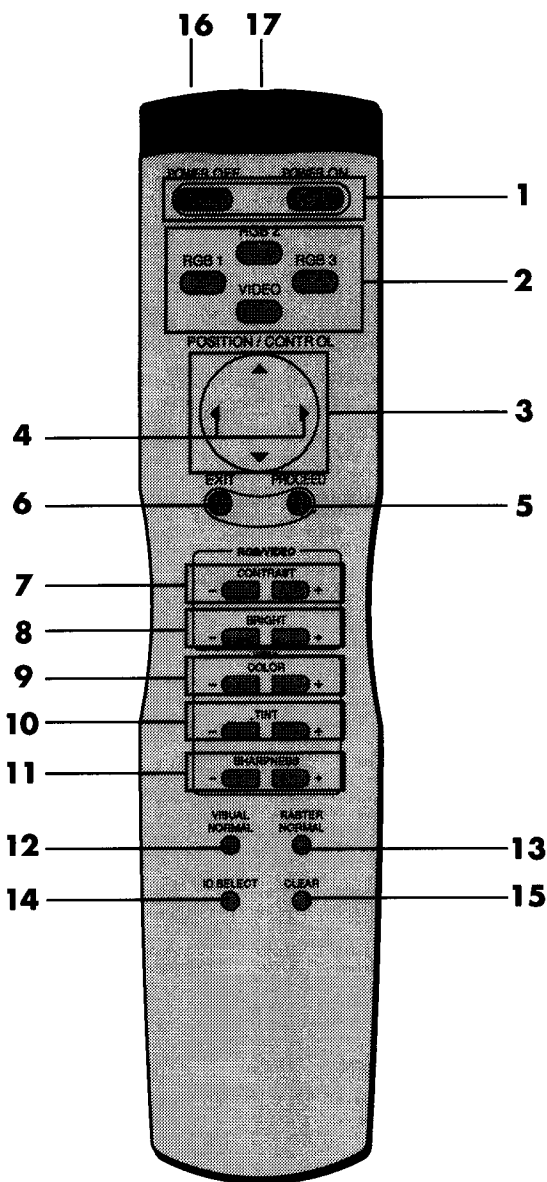

## 1 POWER ON/OFF button:

Switches the power on/off.

(This does not operate when POWER/STANDBY lamp of the main unit is off.)

## 2 Input selection buttons:

Select the input signal that will be displayed on the screen.

**VIDEO:** Switches to the signal that is connected to the VIDEO IN connector.

**RGB1:** Switches to the signal that is connected to the RGB1 IN (mini D-sub 15-pin) connector.

**RGB2:** Switches to the signal that is connected to the RGB2 IN (BNC type: R, G, B, H/CS, V) connector.

**RGB3:** Switches to the signal that is connected to the RGB3 IN connector.

## RASTER CONTROL (Screen Adjustment)

### 3 POSITION/CONTROL buttons (▲▼◀▶):

Used for screen position adjustment and on-screen manager (OSM) mode adjustment settings.

### 4 POSITION/CONTROL buttons (◀▶):

Enable item selection and adjustments/settings.

## ON SCREEN (Screen and Image Adjustment via Menu Control)

### 5 PROCEED button:

Displays the main menu of screen and image adjustments.

Press this button during the display of the main menu to go to the sub menu.

### 6 EXIT button:

Exits the on-screen adjustments.

Press this button during the display of the sub menu to return to the main menu.

## VISUAL CONTROL (Image Adjustment)

### 7 CONTRAST button:

Adjusts the contrast of the RGB signal and the video signal.

### 8 BRIGHT button:

Adjusts the brightness of the RGB signal and the video signal.

### 9 COLOR button:

Adjusts the density of the video signal colors.

### 10 TINT button:

Adjusts the tint of the video signal.

(Does not function in the PAL or SECAM settings.)

**11 SHARPNESS:**

Adjusts the fine screen quality of the video screen.

**12 VISUAL NORMAL button:**

Returns the screen adjustments to the default factory visual settings.

**13 RASTER NORMAL button:**

Returns the screen adjustments to the default factory raster settings.

**14 ID SELECT:**

Selects the ID number used when operating one unit at a time with the remote control when settings of the set ID have been made to the VIDEO WALL and main unit.

**15 CLEAR:**

Deletes the ID number that was set with ID SELECT.

**16 Remote control transmitter:**

Transmits the remote control signal. (Used with the wireless remote control.)


**17 Remote jack:**

Connects the supplied remote control cable when used as a wired remote control.


**Battery Installation and Replacement**

The remote control is powered by two 1.5V AAA batteries.


1. Press and open the cover.

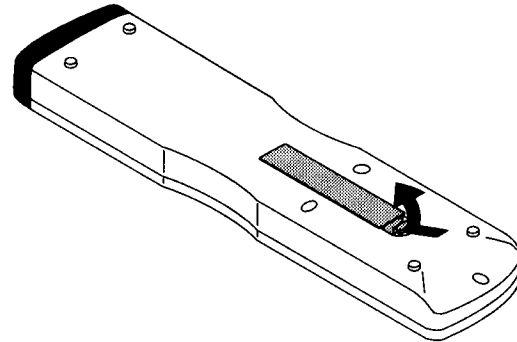

2. Align the batteries according to the (+) and (-) indications inside the case.

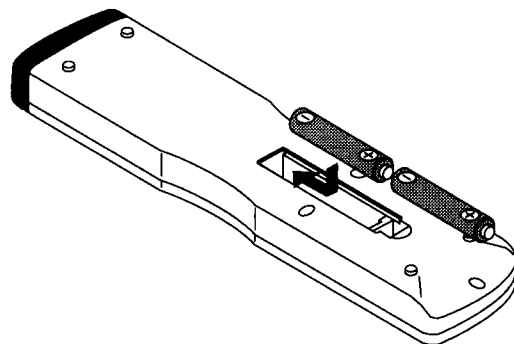


3. Replace the cover.

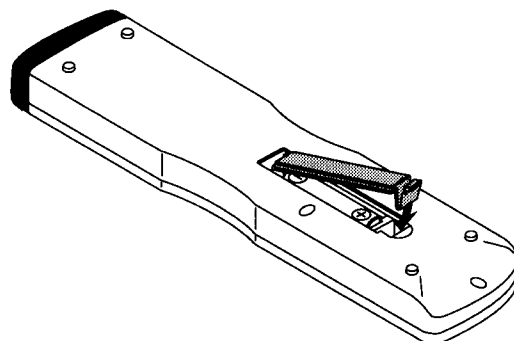

### Operating Range

- \* Use the remote controller within a distance of about 7 m / 23ft. from the front of the monitor's remote control sensor and at a horizontal angle of within 30°.
- \* The remote control operation may not function if the monitor's remote control sensor is exposed to direct sunlight or strong artificial light, or if there is an obstacle between the sensor and the remote control unit.

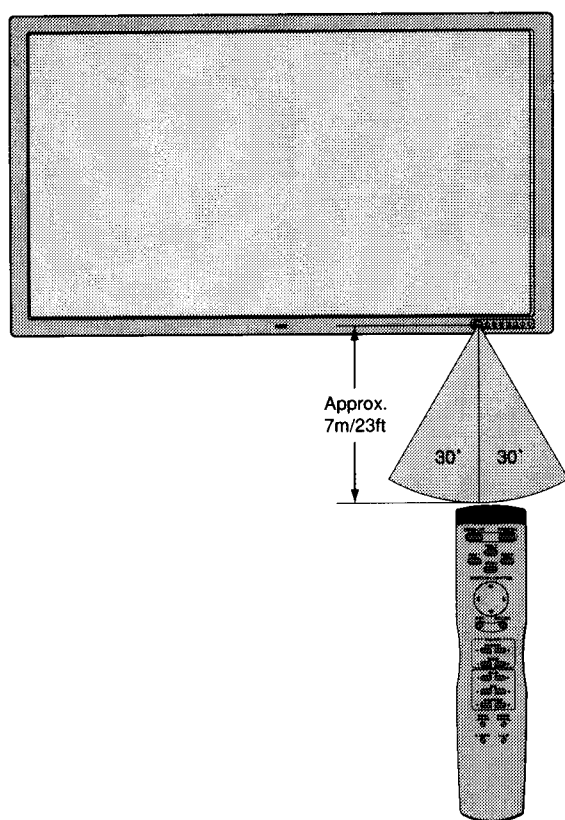


### Using the wired remote control mode

Connect the included remote control cable to the remote control's remote jack and "REMOTE IN" jack on the monitor.

When the cable is connected, the mode automatically switches to wired remote control.

When the wired remote control mode is used, the remote control unit can be operated even if no batteries are loaded.

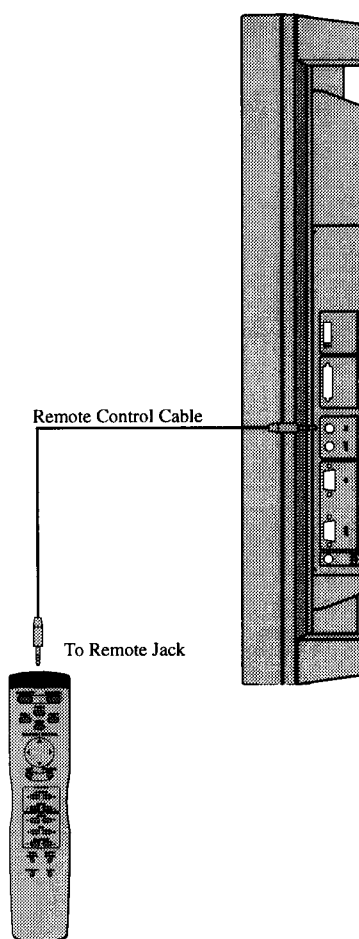

### Note:

*Do not connect the wired remote control to the REMOTE THROUGH OUT jack. If doing so, the remote control does not work.*


# Making the DIP Switch Settings

Before connections are made, the DIP switch should be set to suit the application and the system structure.

- \* DIP switches are moved up or down with something fine and pointed such as a miniature screwdriver or the tip of a ballpoint pen.

**Note:** Be sure to switch off the main power before making settings.

## DIP Switch Functions and Settings



### Factory Default Settings

| Pin No. | Setting details                             | Setting when shipped | Switch position |
|---------|---------------------------------------------|----------------------|-----------------|
| 1       | On-off switching of on-screen display (OSM) | On                   | ON              |
| 2       | On-off switching of wireless remote control | On                   | ON              |
| 3       | Sync control mode                           | Automatic selection  | OFF             |
| 4       |                                             |                      | OFF             |

#### No. 1: On/off switching of on-screen display (OSM)

- \* Set to "ON" when performing adjustments and viewing displays with the on-screen display.
- Set to "OFF" when displays are not desired.

#### No. 2: On/off switching of wireless remote control

- \* When using multiple units under wireless remote control operation, the remote control signal also enters other monitors and may control them at the same time. Monitors for which the reception of the wireless remote control signal is not desired should be set to "OFF."
- \* Be sure to switch the units on when the wireless remote control is to be used.

**Note:** that use of the wired remote control is not related to this setting.

#### Pin Nos. 3 and 4 Sync Control Settings

- \* These are settings of the input sync signals.
- \* When this unit is set to automatic, it automatically detects the separate sync, composite sync, and green sync (sync-on-green). Separate sync should be recognized automatically.

**Note:** When both pins No. 1 and No. 2 are set "ON" the synchronization may be disturbed. Do not set both these pins "ON."

| Sync control setting     | Switch position |      |
|--------------------------|-----------------|------|
|                          | No.3            | No.4 |
| Automatic                | OFF             | OFF  |
| Manual 1 (Composite)     | OFF             | ON   |
| Manual 2 (Sync-on-green) | ON              | OFF  |

## Power Management Function

The power management function is an energy saving function that automatically reduces the power consumption of the display when the keyboard or the mouse have not been used for a fixed period. The power management function of the display becomes operational when the monitor is used with a personal computer based on the VESA DPMS and DVI DMPM system.

When preparing to display a personal computer screen, check that the personal computer is properly connected to this unit and that the personal computer power is on.

When the personal computer power is off, the power management function will be activated and this unit will be set to the off mode.

For information about the power management setting method, see the operating system (OS) manual of the personal computer you are using. To see the video when the power management function is operating, setting the input selection to video will switch the function off.

## Power Management Modes

There are three modes in the power management function.

### \* Standby mode

The standby mode is set when the horizontal sync signal from the personal computer is not input.

The image will be displayed immediately upon the input of the horizontal sync signal.

### \* Suspend mode

The suspend mode is set when the vertical sync signal from the personal computer is not input.

The image will be displayed about 4 seconds after the input of the vertical sync signal.

### \* Off mode

This unit is set to the off mode when the horizontal/vertical sync signals from the personal computer are not input.

The image will be displayed about 4 seconds after the input of the horizontal/vertical sync signal.

This is the only power management mode during RGB3 input. When there is no TMDS link, the off mode is set. (This power state is equivalent to the DPMS "off" state.) Displayed approximately 4 seconds after the TMDS link is restored.

The color in which the STANDBY/POWER lamp lights indicates the mode (listed below) in which the unit is set.


| Mode      | STANDBY/POWER lamp display | Notes                                                              |
|-----------|----------------------------|--------------------------------------------------------------------|
| Power ON  | Green                      | —                                                                  |
| * Standby | Yellow                     | Immediate return to normal display                                 |
| * Suspend | Orange                     | 15 W or less, returns to normal display in about 4 seconds         |
| * OFF     | Orange                     | Maximum 15 W or less, returns to normal display in about 4 seconds |
| Power OFF | Orange                     | Remote control in standby mode                                     |
|           | Not lit                    | Power cord not connected                                           |

\* Standby suspend, off in the table is the condition that exists when power management is ON.

This is not the standby condition set by the remote control.

# Installation

## Wiring Diagram

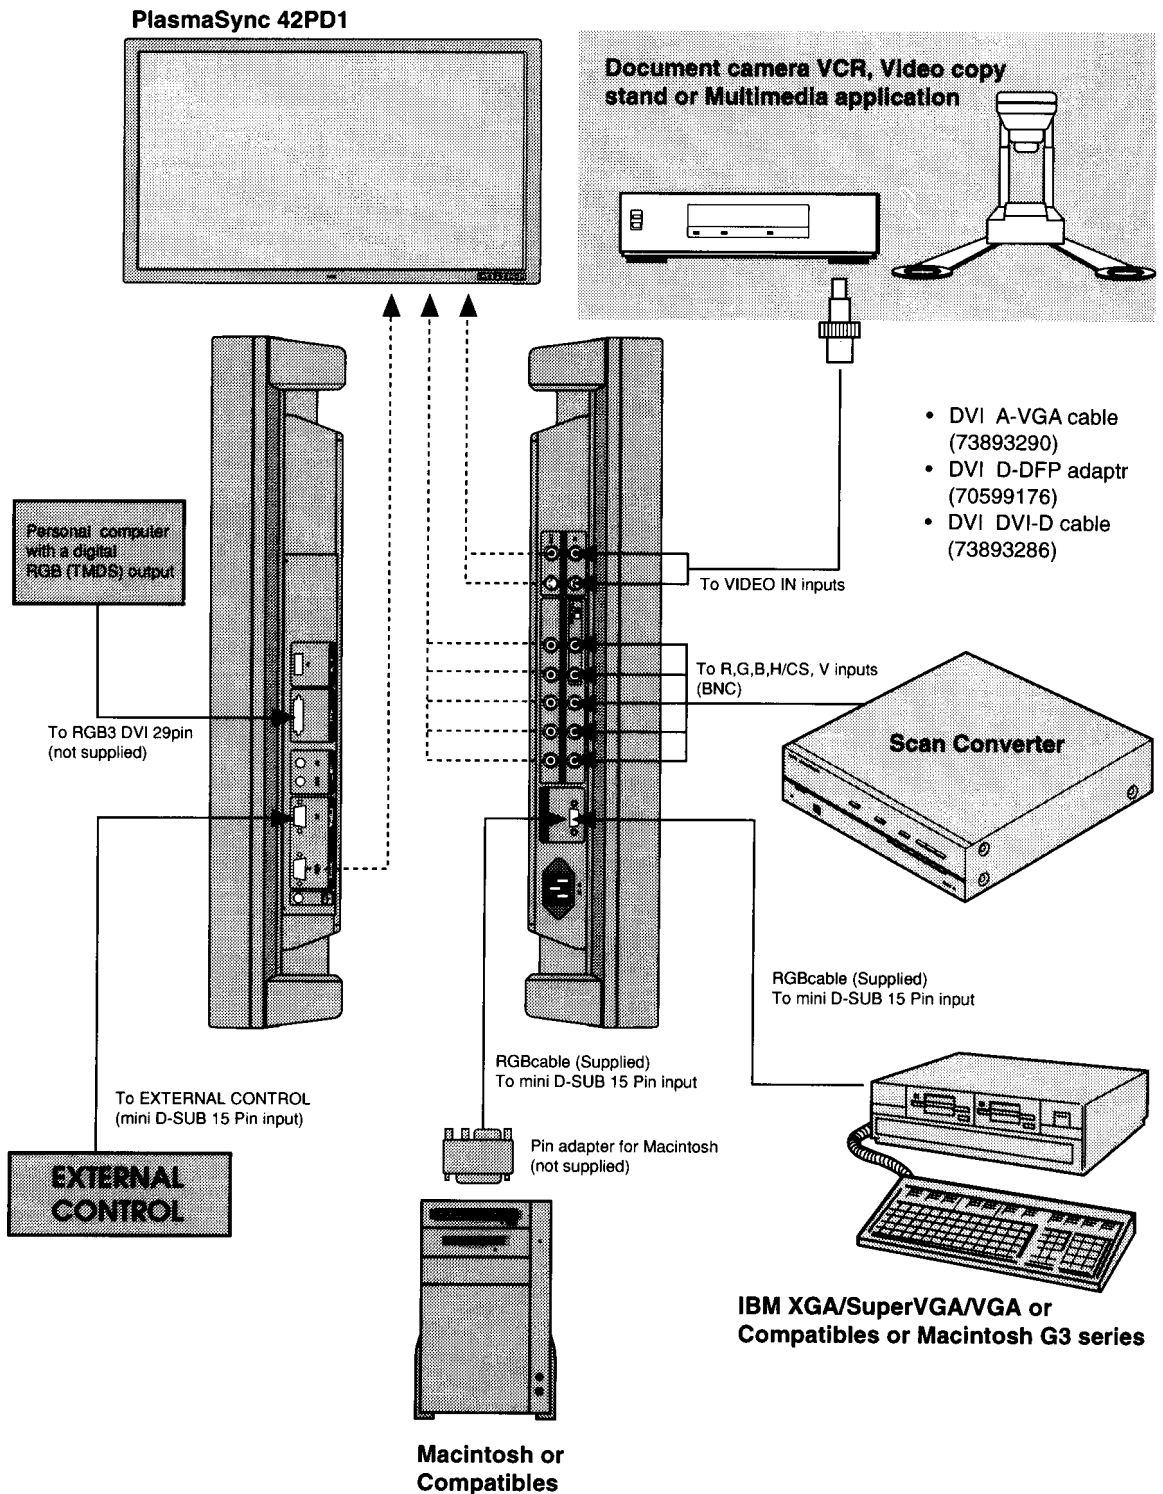

### Connecting Your PC or Macintosh Computer

Connecting your PC or Macintosh computer to your PlasmaSync 42PD1 will enable you to display your computer's screen image. All of these following display standards are supported:

To connect to a PC, Macintosh or computer equipped with an XGA/SuperVGA/VGA adapter or compatible graphics adapter, simply:

1. Turn off the power to your monitor and computer.
2. If your PC does not support XGA/SuperVGA/VGA you will need to install an XGA/SuperVGA/VGA graphics board. Consult your computer's owner's manual for your XGA/SuperVGA/VGA configuration. If you need to install a new board, see the manual that comes with your new graphics board for installation instructions.
3. Use the signal cable that's supplied to connect your PC or Macintosh computer to the RGB1 input terminal.
4. Turn on the monitor and the computer.

**Notes:** Refer to your computer's owner's manual for more information about your computer's video output requirements and any special identification or configuring your monitor's image and monitor may require.

### Connections with Equipment that has a Digital Interface

Connections can be made with equipment that is equipped with a digital interface compliant with the DVI (Digital Visual Interface) standard.

- \* Use a DVI 29-pin signal cable (available separately) and the ferrite cores (supplied) when making connections to the RGB3 IN (DVI) connector of the main unit.

#### **Notes:**

1. Input TMDS signals conforming to DVI standards. The TMDS input corresponds to 1 link.
2. To maintain display quality, use a cable with a quality prescribed by DVI standards that is within 5 meters in length.

### Connecting Your VCR DVD or Laser Disc Player

Use a composite video cable with BNC connector and RCA video cables (not provided) to connect your VCR, DVD or laser disc player to your PlasmaSync 42PD1. To make these connections, simply:

1. Turn off the power to your monitor and VCR, DVD or laser disc player.
2. Connect one end of your video cable to the video output connector on the back of your VCR, DVD or laser disc player, connect the other and to the VIDEO input terminal (BNC type) of the monitor.  
**NOTE:** You will need a BNC to RCA adapter (not included) to connect a video cable with an RCA pin jack to the BNC input terminal of the PlasmaSync 42PD1.
3. Turn on the monitor and the VCR, DVD or laser disc player.

**Notes:** Refer to your VCR or laser disc player owner's manual for more information about your equipment's video output requirements.

**Notes:** S-VIDEO IN terminals will take preference over VIDEO IN terminals when a component is connected to each terminal and S-VIDEO selected.

### Connecting Your Document Camera

You can connect your PlasmaSync 42PD1 to a document camera. To do so, simply:

1. Turn off the power to your monitor and document camera.
2. Use a standard video cable to connect your document camera to the VIDEO input terminal(BNC-type) of the monitor.
3. Turn on the monitor and the document camera.

**Notes:** Refer to your document camera's owner's manual for more information about your camera's video output requirements.

## Daisy-chaining Your monitors

The REMOTE IN/OUT terminals allow you to control multiple monitors using one remote control.

**Note:** The connection of more than three PlasmaSync 42PD1 or more with THROUGH OUT (VIDEO) terminals may degrade image quality.

To do so:

**When using the VIDEO inputs:**

### THROUGH OUT (VIDEO) Connections

1. Connect THROUGH OUT BNC or S-VIDEO OUT to external components to relay the signal input at VIDEO IN(BNC-type), or S-VIDEO IN.

**When using the RGB inputs:**

THROUGH OUT Connections

1. (RGB2): Connect the R.G.B.H/CS and V THROUGH OUT terminals to relay the signal input at the R.G.B.H/CS and V IN terminals.
2. Connect the REMOTE IN of the monitor to the REMOTE OUT of the next monitor using the optional remote cable.

**Note:** "Plug and Play" is not available for the RGB 2 BNC terminals.

**Note:** A maximum of 3 units can be used which a cascade connection. (VIDEO, RGB2)

# Operation

## Power

The main unit enters the standby mode when the AC cable is plugged in.

This section describes how to select a computer or video source and how to adjust the picture.

## General Controls

Before you turn on your PlasmaSync 42PD1 ensure that the computer or video source is turned on.

1) To adjust:

### 1. Turn On The Monitor

The power button is on the front panel of the monitor. By turning this switch on, the POWER/STANDBY indicator will turn to green and the monitor will become ready to use. OSM is also usable from the front panel.

After you press the POWER OFF button on the remote control, the monitor will go into its standby mode and the POWER/STANDBY indicator will glow orange.

**NOTE:** The set is set to the standby mode when the power cord is plugged in.

### 2. Select The Computer Or Video Source

Press the "VIDEO" or "RGB 1" "RGB 2" or "RGB 3"(computer) button on the remote control to display the image. Or press the button on the front panel to select your video source: "VIDEO", "RGB 1", "RGB 2" or "RGB 3".

**NOTE 1:** In the U.S.A. the standard video signal format is NTSC, therefore make sure that the AUTO or NTSC is selected on OSM system control menu. See page 41.

**NOTE 2:** Select the over scan mode for VIDEO display.

When the RGB input is used, the mode of the power management function can only be in the off state.

In the absence of TMDS signal input, the unit will be in the off state.

(The DVI standard DMPM Active-off power state is equivalent to this.)

The picture will be projected about 4 seconds after the TMDS signal input returns.

### 3. Adjust The Raster or The Picture Control.

You can adjust the raster such as the horizontal size, vertical size and the brightness and contrast of the image with the remote control.

### 4. Turning Off The monitor.

Press the POWER OFF button on the remote control or press the POWER button on the front panel.

## Adjustment of the Display

There are two methods of adjusting the screen/image using the remote control. One way is direct adjustment by pressing the various buttons and displaying the desired adjustment screens. The other way is to select the menu and display the adjustment screen. This is the menu control adjustment.

### When Using the Power Management Function

This unit is designed for use with power management function of the VESA DPMS and DVI DMPM system.

When connected with a personal computer or other equipment incorporating the power management software, power consumption is reduced while the monitor is not being used. During power management operation, the STANDBY/POWER lamp changes color to orange or yellow.

\* The fan may stop during power management operation. This does not indicate a failure.

## Adjustment of the Display (Direct)

Press the buttons of the remote control to make direct adjustments and settings. A press of the desired button will show the adjustment display. The adjustment condition is stored in memory even after the power is switched off.



Preparation: Select the input screen (VIDEO, RGB1, RGB2, RGB3) that is to be adjusted, then input the signal of the connected equipment.

### Adjustment of the Screen


The adjustment of screen size is made easier when a geometric shape such as a square is displayed.

Press the button to show the adjustment display. The display will go off about 3 seconds after your finger is released from the button.


### Adjustment of the screen display position

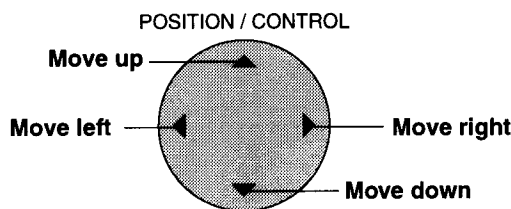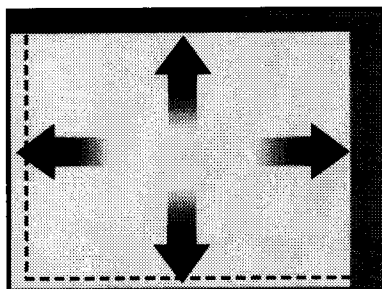

### Adjustment display of the up/down position

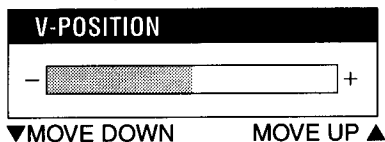

### Adjustment display of the left/right position

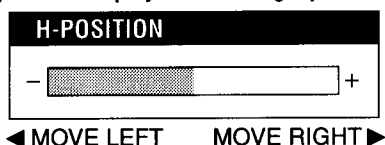


## Returning the Screen Adjustment to the Factory Default Settings (NORMAL)

The display position (POSITION) will return to the factory default setting. At this time the following settings of the menu control will also simultaneously return to the factory default settings: auto picture, picture adjust, fine picture, H/V-POSITION 1, H/V-POSITION 2, H-WIDTH (Multiple Screens only), V-HEIGHT (Multiple Screens only), and OSM location.

### 1. Press the RASTER NORMAL button

The verification sub menu is displayed.



### 2. A press of the PROCEED button will reset the adjustment.

To cancel the reset, press the EXIT button.



- \* Use the RASTER NORMAL button. A press of the VISUAL NORMAL button will not return the screen adjustment to the factory default setting.
- \* A press of the NORMAL button during the on-screen display will return only the display item to the factory default setting.
- \* H-POSI 1 and V-POSI 1 are not available at the time of RGB input when AUTO PICTURE is turned on. To adjust H-POSI 1 and V-POSI 1 at the time of RGB input, turn off AUTO PICTURE.

## Adjustment of the Image

Press the button to show the adjustment display. The display will go off about 3 seconds after your finger is released from the button.

### Items adjusted with the VIDEO screen and RGB signals

#### Contrast adjustment (CONTRAST)





Image becomes fainter — + Image becomes denser


#### Brightness adjustment (BRIGHTNESS)



Screen becomes darker — + Screen becomes brighter


### Items adjusted with only VIDEO signals

#### Color density adjustment




Color becomes lighter — + Color becomes deeper

#### Tint adjustment



Screen is tinted toward red — + Screen is tinted toward green

#### Sharpness adjustment (SHARPNESS)




Softer quality — + Sharper quality

## Returning the Image Adjustments to the Factory Default Settings (NORMAL)

The contrast, brightness, color, tint, gamma, color temp and sharpness adjustments can be returned to the factory default settings. At this time, White Balance of the menu control will simultaneously return to the factory default setting.


### 1. Press the VISUAL NORMAL button

The verification sub menu is displayed.



### 2. A press of the PROCEED button will reset the adjustment.

To cancel the reset, press the EXIT button.



- \* Use the VISUAL NORMAL button. A press of the RASTER NORMAL button will not return the screen adjustment to the factory default setting.
- \* A press of the NORMAL button during the on-screen display will return only the display item to the factory default setting.

# Adjustment of the Display (Menu Control)

Use of the on-screen display (OSM) function allows the setting of various fine adjustments to be made. The adjustment details will be stored even when the power is switched off.


The on-screen display (OSM) function puts an adjustment display onto the screen and adjustments are made while viewing this display.

## List of Setting Details

| Icon                                                                                | On-screen menu        | Sub menu                                                                                                                                                                                 | Adjustment details                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <b>Visual Control</b> | <b>At time of video input selection</b><br>Brightness<br>Contrast<br>Color<br>Tint<br>Sharpness<br>Gamma<br><br><b>At time of RGB input selection</b><br>Brightness<br>Contrast<br>Gamma | Image adjustment (The display will differ between video input selection and RGB input selection.)<br><br>Brightness adjustment<br>Contrast adjustment<br>Adjustment of the density of the colors<br>Tint adjustment<br>Sharpness adjustment<br>Adjustment of the gamma characteristics (Adjusts the brightness of dark portions)<br><br>Brightness adjustment<br>Contrast adjustment<br>Adjustment of the gamma characteristics (Adjusts the brightness of dark portions) |
|   | <b>H-Position</b>     | H-Position 1<br>H-Position 2<br><br>H-Width                                                                                                                                              | Horizontal position adjustment 1<br>Horizontal position adjustment 2<br>Adjust when the screen position is unsuitable even after making the adjustment with H-POSITION 1. (Adjustment is not required with a standard signal.)<br>Horizontal enlargement ratio adjustment (Only for Multiple Screens)                                                                                                                                                                     |
|  | <b>V-Position</b>     | V-Position 1<br>V-Position 2<br><br>V-Height                                                                                                                                             | Vertical position adjustment 1<br>Vertical position adjustment 2<br>Adjust when the screen position is unsuitable even after making the adjustment with V-POSITION 1. (Adjustment is not required with a standard signal.)<br>Vertical enlargement ratio adjustment (Only for Multiple Screens)                                                                                                                                                                           |
|  | <b>Color Temp</b>     | High<br>Low<br>At time of USER selection<br>Gain<br><br>Bias                                                                                                                             | Color temperature adjustment<br>High<br>Low<br>White balance adjustment<br>White balance adjustment of bright images (high brightness)<br>White balance adjustment of dark images (dark colors)                                                                                                                                                                                                                                                                           |
|  | <b>OSM Location</b>   | OSM H-Position<br>OSM V-Position<br>OSM Angle<br><br>OSM Display Time                                                                                                                    | On-screen adjustment<br>On-screen horizontal position adjustment<br>On-screen vertical position adjustment<br>On-screen angle setting (Horizontal and vertical display)<br>On-screen display OFF time setting                                                                                                                                                                                                                                                             |
| <b>AUTO</b>                                                                         | <b>Auto Picture</b>   | Auto Picture<br><br>Mode<br>Picture ADJ<br>Fine Picture                                                                                                                                  | Used to automatically adjust the clock frequency and clock phase in personal computer screen adjustment.<br>Signal discrimination<br>Clock frequency adjustment<br>Clock phase adjustment                                                                                                                                                                                                                                                                                 |
|  | <b>Normal</b>         | All Visual Normal<br>All Raster Normal<br>All Normal                                                                                                                                     | Visual setting reset<br>Raster setting reset<br>Visual/Raster setting reset                                                                                                                                                                                                                                                                                                                                                                                               |
|  | <b>Previous page</b>  |                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

| Icon                                                                                | On-screen menu  | Sub menu                                                                                                | Adjustment details                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | Next page       |                                                                                                         |                                                                                                                                                                                                                                                                                    |
|    | Display Mode    | Source Info:<br>H-Freq.:<br>V-Freq.:<br>H-Pol.:<br><br>V-Pol.:                                          | Display mode display<br>Display source (VIDEO/RGB1,2,3)<br>Horizontal frequency (kHz)<br>Vertical frequency (Hz)<br>Polarity of horizontal sync<br>Neg./Pos. (Negative polarity/Positive polarity)<br>Polarity of vertical sync<br>Neg./Pos. (Negative polarity/Positive polarity) |
|    | Present Time    | Timer                                                                                                   | Present Time<br>Timer ON/OFF time and mode setting                                                                                                                                                                                                                                 |
|    | VIDEO WALL Menu | Screen Divider Setting<br>Position of Divider                                                           | Multiple screens settings<br>Screen division setting<br>Screen division position setting                                                                                                                                                                                           |
|    | HANDY 1         | Wide Mode<br>Color System<br>RGB Mode<br>Power On Mode<br>Power Manage<br>External Control<br>All Reset | Wide mode setting<br>Color system setting<br>RGB mode setting<br>Power ON mode setting<br>Power management setting<br>External control setting<br>Settings reset                                                                                                                   |
|  | HANDY 2         | Long Life Mode 1<br>Long Life Mode 2<br>Gray Level<br>Set ID No.<br>RGB 3 ADJ<br>All Reset              | Long life mode 1 setting<br>Long life mode 2 setting<br>Gray level setting<br>Set ID number setting<br>Set when the image of RGB 3 is in disorder.<br>Settings reset                                                                                                               |

## Before Making Adjustments...

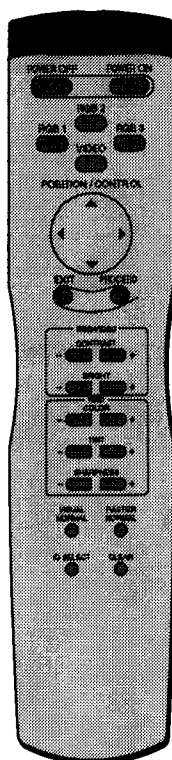

Adjust using the remote control buttons.

### PROCEED button

Press to display the main menu.

Press in the main menu to display the sub menu.

### EXIT button

Press in the main menu to turn off the display and exit.

Press during the display of the sub menu to return to the main menu.

### POSITION/CONTROL ▲ / ▼ buttons

Moves the cursor up or down and selects the adjustment item.

### POSITION/CONTROL ◀ / ▶ buttons


Moves the cursor left or right and selects an icon. Press during the display of the sub menu to increase or decrease the adjustment value (and the bar will lengthen or shorten in the positive (+) or negative (-) direction).

### VISUAL NORMAL button or RASTER NORMAL button


Resets the adjustment value of the selected item in the menu display. (Values return to the factory default settings.) When a menu is not being displayed, all of the screen adjustments or all of the image adjustment items are reset. (There are two types of NORMAL functions: one is "RASTER" for screen adjustments and the other is "VISUAL" for image adjustments.)

## Operation of the On-screen Display

### Main menu




Display the next page



Display the previous page

### Sub menu



Cursor

Display the adjustment value

The items of the main menu are displayed as icons.  
See Page 25 for details.

---

### To Reset the Adjustment Value (to the Factory Default Setting) During the Setting


1. Press the **VISUAL NORMAL** button or **RASTER NORAMAL** button.

The verification sub menu is displayed.



2. A press of the **PROCEED** button will reset the adjustment.

To cancel the reset, press the **EXIT** button.



PROCEED



#### Automatic Storage


After the adjustment, the setting values are stored automatically. Note that automatic storage is not available in the following instance.

## Adjustment of the Image (Visual Controls)


These controls adjust the brightness, contrast, color, tint, and sharpness.

### 1. Align the cursor with icon (1).

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

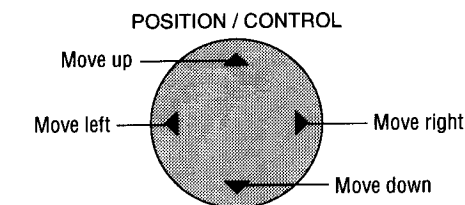


Visual control screen

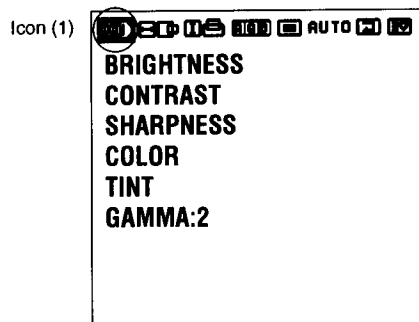


### 2. Align the cursor with the desired item

The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.

At time of VIDEO selection




At time of RGB1/2/3 selection



### 3. While watching the screen, press the ◀/▶ buttons and adjust

Please use the table below as reference.

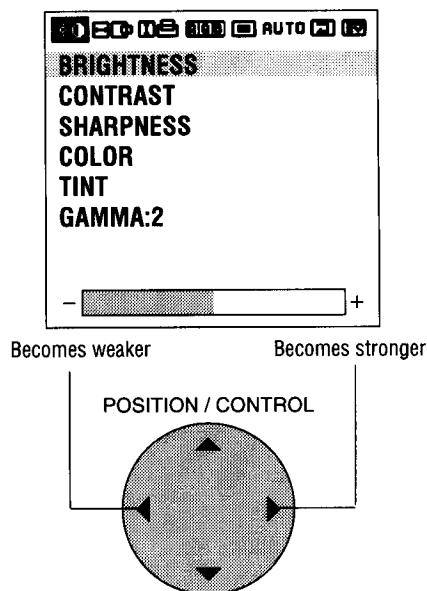

### 4. Return to the main menu

EXIT



- \* To reset the adjustment value, press the VISUAL NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.

| Display (Adjustment details)                           | Pressing the ◀ button       | Pressing the ▶ button         |
|--------------------------------------------------------|-----------------------------|-------------------------------|
| <b>Brightness</b> (Brightness adjustment)              | Screen becomes darker       | Screen becomes brighter       |
| <b>Contrast</b> (Contrast adjustment)                  | Image becomes fainter       | Image becomes denser          |
| <b>Color</b> (Color density adjustment)                | Color becomes lighter       | Color becomes deeper          |
| <b>Tint*</b> (Tint)                                    | Screen is tinted toward red | Screen is tinted toward green |
| <b>Sharpness</b> (Sharpness adjustment)                | Softer quality              | Sharper quality               |
| <b>Gamma</b> (Adjusts the brightness of dark portions) | Normal                      | Darker                        |

\*Tint cannot be adjusted when the video system selection switch is set to PAL or SECAM.

**Note:** When dark portions appear rough, adjust Gama to provide an easy-to-view image.

## Adjustment of Screen Position (Horizontal)

Horizontal (H) Adjustment Screen


### 1. Align the cursor with icon (2)

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

H-WIDTH: Horizontal enlargement ratio adjustment  
(Displayed only with Multiple Screens)

Adjustment is possible only in multi mode.

H-POSITION 2 cannot be adjusted at the time of VIDEO input.

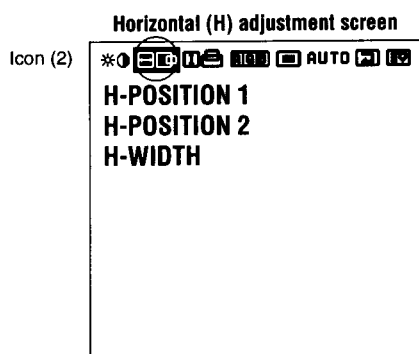

### 2. Align the cursor with the desired item

The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.

H-POSITION 1: Horizontal position 1

H-POSITION 2: Horizontal position 2


Adjust when the screen position is unsuitable even after making the adjustment with H-POSITION 1.

(Adjustment is not required with a standard signal.)


H-WIDTH: Horizontal enlargement ratio adjustment  
(Displayed only with Multiple Screens)

Adjustment is possible only in multi mode.

H-POSITION 2 cannot be adjusted at the time of VIDEO input.



### 3. While watching the screen, press the ◀/▶ buttons and adjust

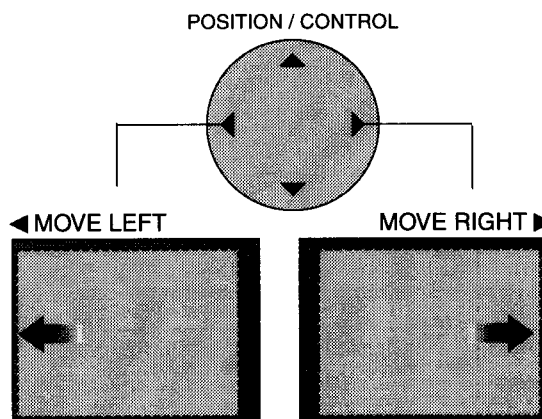

### 4. Return to the main menu

EXIT



- \* To reset the adjustment value, press the RASTER NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.
- \* H-POS1 and V-POS1 are not available at the time of RGB input when AUTO PICTURE is turned on. To adjust H-POS1 and V-POS1 at the time of RGB input, turn off AUTO PICTURE.

## Adjustment of Screen Position (Vertical)

Vertical (V) Adjustment Screen

### 1. Align the cursor with icon (3)


The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

V-HEIGHT: Vertical enlargement ratio adjustment  
(Displayed only with Multiple Screens)

Adjustment is possible only in multi mode.

V-POSITION 2 cannot be adjusted at the time of VIDEO input.

#### Vertical (V) adjustment screen

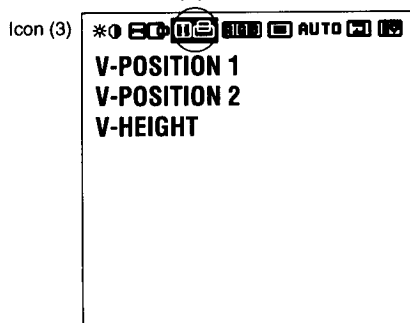

### 2. Align the cursor with the desired item

The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.

V-POSITION 1: Vertical position

V-POSITION 2: Vertical position


Adjust when the screen position is unsuitable even after making the adjustment with V-POSITION 1.

(Adjustment is not required with a standard signal.)


V-HEIGHT: Vertical enlargement ratio adjustment  
(Displayed only with Multiple Screens)

Adjustment is possible only in multi mode.

V-POSITION 2 cannot be adjusted at the time of VIDEO input.



### 3. While watching the screen, press the ◀/▶ buttons and adjust

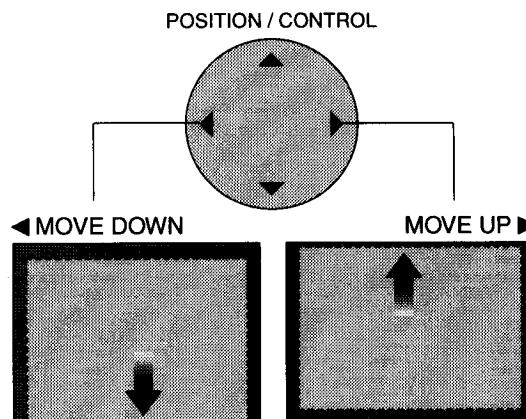

### 4. Return to the main menu

EXIT




- \* To reset the adjustment value, press the RASTER NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.
- \* H-POS1 1 and V-POS1 1 are not available at the time of RGB input when AUTO PICTURE is turned on. To adjust H-POS1 1 and V-POS1 1 at the time of RGB input, turn off AUTO PICTURE.

**Color Temperature (COLOR TEMP)**


This adjusts the color temperature.

**1. Align the cursor with icon (4)**


The cursor is moved left and right with the POSITION CONTROL◀/▶ buttons.

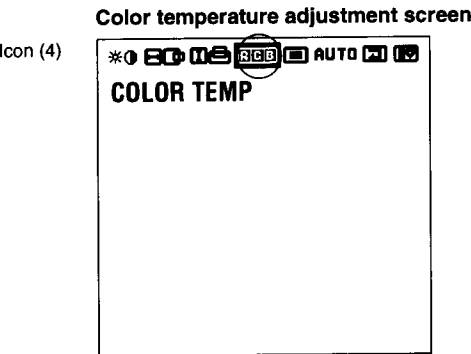

**2. Align the cursor with COLOR TEMP and set with the ◀/▶ buttons.**



Color temperature adjustment  
HIGH : High  
LOW : Low  
USER : User setting

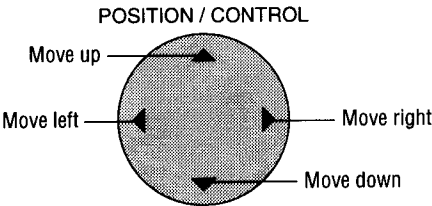

**3. Return to the main menu**



- \* To reset the adjustment value, press the VISUAL NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.


### Adjustment of the White Balance

This adjusts the white balance of bright images (Gain) and dark images (Bias).

#### 1. Align the cursor with icon (4)

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.


#### Color temperature adjustment screen

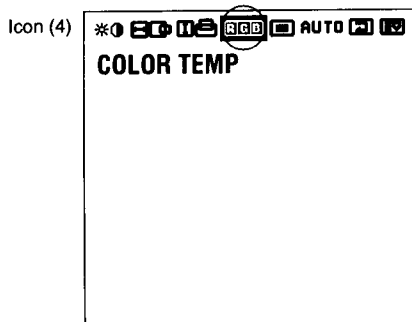



#### 2. After selecting COLOR TEMP, align the cursor with USER and press the PROCEED button.

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

PROCEED



#### 3. Align the cursor with Gain or Bias of the sub menu, then make the adjustment with the ◀/▶ buttons while watching the screen.

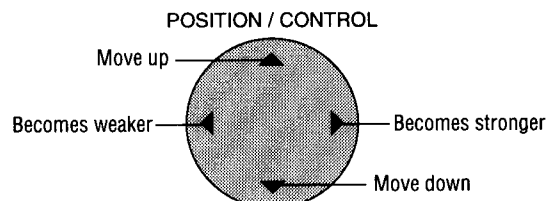

#### 4. Return to the main menu

EXIT




- \* To reset the adjustment value, press the VISUAL NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.

## Adjustment of the On-screen Display Position



### 1. Align the cursor with icon (5)

The cursor is moved left and right with the POSITION CONTROL ◀ / ▶ buttons.

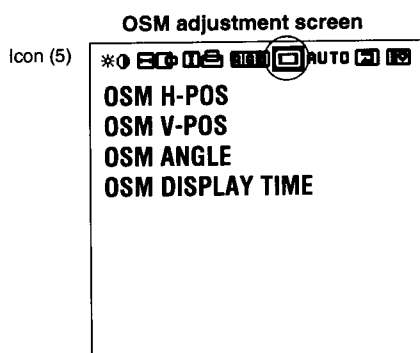

### 2. Align the cursor with the desired item from the sub menu and adjust.

The cursor is moved up and down with the POSITION CONTROL ▲ / ▼ buttons.

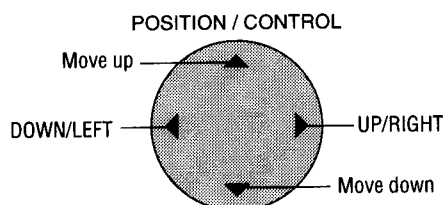

The OSM screen can be rotated 90° counterclockwise for easy viewing in portrait mode by changing the OSM ANGLE on the menu.

### 3. Exiting the adjustment

EXIT



The display will change to the main menu. Another press of the button will delete the main menu and exit the adjustment.

- \* The change will be stored when the menu is deleted. To reset the adjustment value, press the RASTER NORMAL button before pressing the EXIT button.
- \* To adjust another item, press the EXIT button.

## Setting the On-screen Display OFF Time

While using the on-screen display (OSM), the OFF time setting functions to automatically turn off the on-screen display when there is no input.

## 3. Return to the main menu


EXIT



### 1. Align the cursor with icon (5)

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.



\* To delete the main menu, press the EXIT button once more.

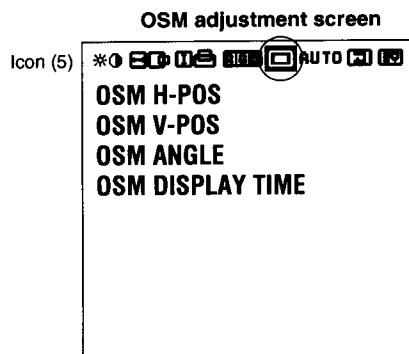

### 2. Align the cursor with OSM DISPLAY TIME of the sub menu and select the desired time

Align with the inverted characters.

The following can be selected: 5 seconds, 10 seconds, 30 seconds, 60 seconds, and 120 seconds.

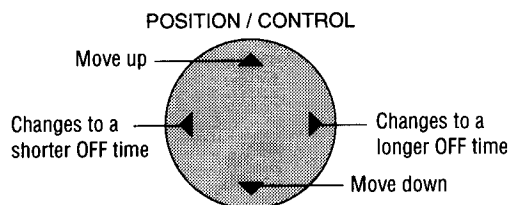

\* The factory default setting is 30 seconds.

## Adjustment of the Clock Frequency/Clock Phase (AUTO PICTURE)


When AUTO PICTURE is set to ON, normally the clock frequency adjustment and the clock phase adjustment are not necessary, but this adjustment should be made when the automatic adjustment cannot be made correctly. Make the adjustment when a new signal has been input, when vertical lines appear blurry, or if the image appears unclear.

H-POSI 1 and V-POSI 1 are not available at the time of RGB input when AUTO PICTURE is turned on.

To adjust H-POSI 1 and V-POSI 1 at the time of RGB input, turn off AUTO PICTURE.

### 1. Align the cursor with icon (6)


The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

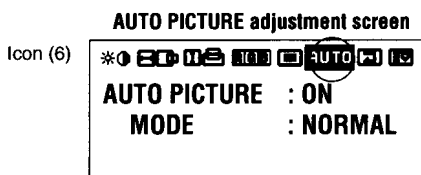

### 2. Align the cursor with AUTO PICTURE and set to OFF.

AUTO PICTURE: Automatically adjusts the screen position, clock frequency, and clock phase when ON.

\* The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.



### AUTO PICTURE: ON/OFF


Select with POSITION CONTROL ◀/▶ buttons.

There is a transition to the screen below only when OFF.

### Note:

- The Picture ADJ and Fine Picture features are available only when the Auto Picture is off. The Picture ADJ and Fine Picture features are not available for Video or S-Video source.
- When the Auto Picture is on, the Picture ADJ and Fine Picture adjustments are made automatically.
- The Picture Adjustment control allows you to fine tune the computer image or to remove vertical banding that might appear. This function adjusts the clock frequencies that eliminate banding in the image.
- The Fine Picture adjusts the clock phase or reduces video noise, dot interference or cross talk. (This is evident when parts of the image appear to be shimmering.) The Fine Picture adjustment may be necessary when you connect your computer for the first time and you have a blurred picture on the screen.

### 3. Align the cursor with the desired item using the POSITION CONTROL ◀/▶ buttons.

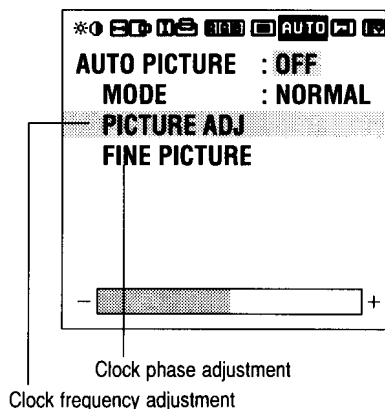

### MODE: NORMAL/WIDE


Select with the POSITION CONTROL ◀/▶ buttons.

### 4. Make the various adjustments with the POSITION CONTROL ◀/▶ buttons.

\* Clock frequency adjustment (Picture ADJ)

Adjust the clock frequency and adjust the width of the image with respect to the screen.

The adjustment is made with a dot unit signal. Adjust to the position at which vertical flickering disappears.

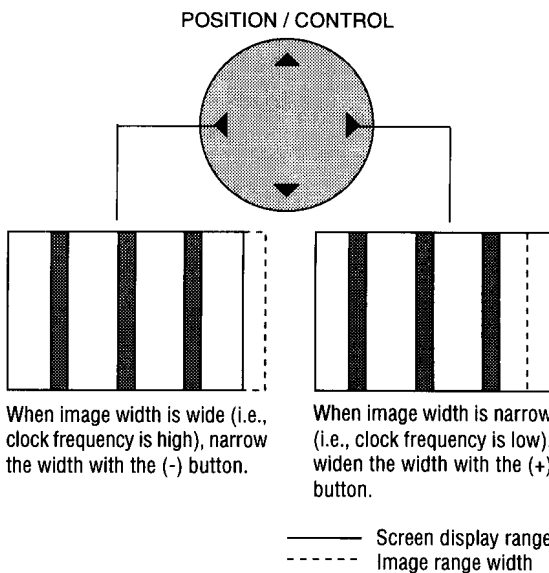

Go to operation 2 when continuing the adjustment

**\* Clock phase adjustment (Fine Picture)**

Adjust the phase of the clock and adjust the (+) and (-) buttons so that screen noise, flicker, and color infidelity are minimized. First adjust the clock frequency, then perform the clock phase adjustment.

**Note:** Neither the clock frequency adjustment nor the clock phase adjustment function are available at the time of VIDEO and S-VIDEO input.

**5. Return to the main menu**

EXIT




- \* To reset the adjustment value, press the RASTER NORMAL button before pressing the EXIT button.
- \* To delete the main menu, press the EXIT button once more.

**Normal Screen**

Returns the user side image data of the mode currently being input to the standard condition.


**1. Align the cursor with icon (7)**

The cursor is moved left and right with the POSITION CONTROL ◀ / ▶ buttons.

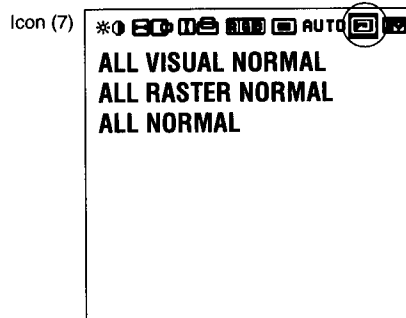

**2. Align the cursor with the desired item and press the PROCEED button.**

The cursor is moved up and down with the POSITION CONTROL ▲ / ▼ buttons.



**ALL RASTER NORMAL**

- \* Initialization items  
H-POS1 1,2, V-POS1 1,2, AUTO PICTURE, OSM POSITION.
- \* The following items are added in multi mode:  
Screen switching position, horizontal/vertical enlargement ratio (H/V WIDTH)

**ALL VISUAL NORMAL**

Color, tint, sharpness, contrast, brightness, color temperature, gamma.

3. Return to the main menu




\* To delete the main menu, press the EXIT button once more.

Next Page Screen

1. Moving the cursor to the next page icon (8) at the right edge of the screen will move the display to the second page.


The cursor is moved left and right with the POSITION CONTROL◀/▶ buttons.

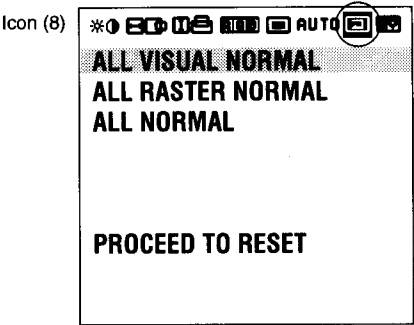

Previous Page Screen

1. Align the cursor with icon (9) at the very top to move to the first page menu screen.


The cursor is moved left and right with the POSITION CONTROL◀/▶ buttons.

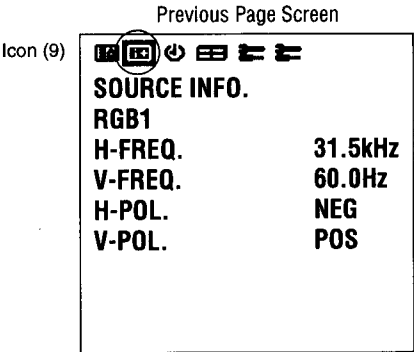

## Information Screen

This permits a check on-screen of the resolution and data of the signal that is currently being input.

1. Align the cursor with icon (10) on the second page of the main menu and display the display mode.

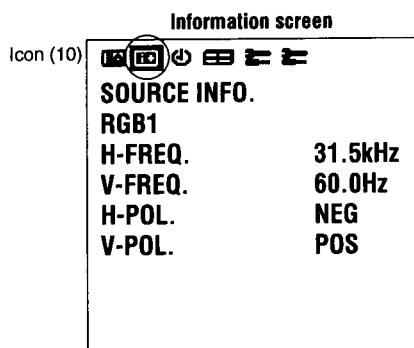

### \* When RGB input is selected

SOURCE: RGB1, RGB2, RGB3

"NO SIGNAL" is displayed when there is no signal.

H-FREQ: Horizontal frequency (kHz)


V-FREQ: Vertical frequency (Hz)

H-POL: Polarity of the horizontal sync signal

Neg./Pos. (Negative polarity/Positive polarity)

V-Pol.: Polarity of vertical sync

Neg./Pos. (Negative polarity/Positive polarity)



### \* When video input is selected

SOURCE: VIDEO

MODE: NTSC, PAL, SECAM

**Note:** NTSC is processed as 4.43 NTSC.

## 2. Return to the main menu

EXIT



\* Settings cannot be reset.

\* To delete the main menu, press the EXIT button once more.


\* The vertical frequency that is displayed in the display mode can have a signal difference with respect to the actual vertical frequency of the connected input signal. Vertical signals of between 60 Hz and 70 Hz have an error of plus/minus 3 Hz. Vertical signals of 70 Hz or greater have an error of plus/minus 5 Hz. The frequency display of the display mode via the OSM system should always be regarded as a guideline.

## Timer Screen


This sets the date and time.

### 1. Align the cursor with icon (11) of the second page.

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

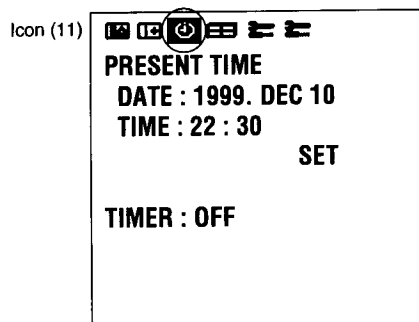

### 2. Use the ▲ / ▼ buttons to move to each of the year, month, day, hour, and minute positions, and the ◀/▶ buttons to set the numbers.




### 3. Align the cursor with SET and press PROCEED

PROCEED



\* When the timer has been set, the LED will flash orange every 3 seconds during remote control standby.

**Note:** Data can be maintained for about one month by the built-in lithium battery even when the AC cable is disconnected.

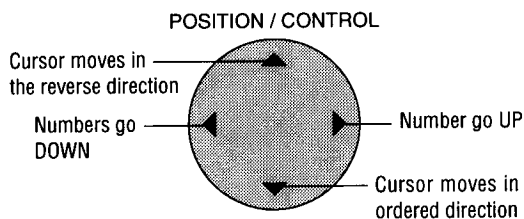

### Setting range of date and time settings


Year: 1999 to 2099, Month: JAN to DEC, Day: 01 to 31  
Hours: 00 to 24, Minutes: 00 to 59

### Auto Timer Screen

This is used for setting the time mode for switching the power ON/OFF.


#### 1. Align the cursor with icon (11) of the second page.

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

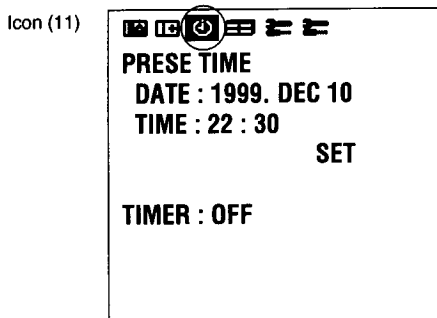

#### 2. Align the cursor with TIMER and switch it ON with the ◀/▶ buttons, then press the PROCEED button.

\* The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.



#### 3. Press PROCEED for PROGRAM MENU.

#### 4. Use the ▲/▼ buttons to align the cursor with the DATE screen position.

The sub menu is displayed.


Auto Timer Screen

| PROGRAM MENU |       |       |       |
|--------------|-------|-------|-------|
| DATE         | ON    | OFF   | MODE  |
| OCT30        | 10:10 | 13:00 | VIDEO |
| JAN01        | 22:15 | 24:00 | INV   |
| MON*         | 15:45 | 19:00 | VIDEO |
| WED*         | 09:00 | 11:00 | RGB1  |
| THU*         | 08:15 | 10:00 | RGB2  |
| *            | 13:30 | 14:30 | VIDEO |
| *            | 21:00 | 22:00 | RGB1  |

#### 5. Press PROCEED from PROGRAM MENU.

#### 6. Select the DATE input method from among DIRECT, DAILY, and WEEKLY, then press the EXIT button.

The cursor is moved up and down with the POSITION CONTROL ▲/▼ buttons.



#### 7. Push EXIT to return to PROGRAM MENU.

EXIT



#### The DATE display is as follows:

It is input in the format of JAN~DEC\*\* in DIRECT selection.

In the DAILY selection, \* is displayed for daily.

In the WEEKLY selection, the input of Monday through Sunday (on a weekly basis) is abbreviated to 3 characters as listed below, and the fourth character is \*.


MON, TUE, WED, THU, FRI, SAT, SUN

\* The cursor is moved up and down with the POSITION CONTROL ◀/▶ buttons.

8. Align the cursor with the ON/OFF and set with the ◀/▶ button.

Auto Timer Screen

| PROGRAM MENU |       |       |       |
|--------------|-------|-------|-------|
| DATE         | ON    | OFF   | MODE  |
| OCT30        | 10:10 | 13:00 | VIDEO |
| JAN01        | 22:15 | 24:00 | INV   |
| MON*         | 15:45 | 19:00 | VIDEO |
| WED*         | 09:00 | 11:00 | RGB1  |
| THU*         | 08:15 | 10:00 | RGB2  |
| *            | 13:30 | 14:30 | VIDEO |
| *            | 21:00 | 22:00 | RGB1  |

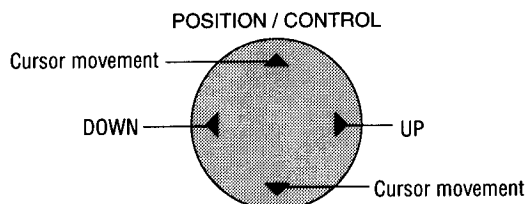

- \* The ON/OFF time is moved one digit at a time with the up and down cursors, and the left and right buttons change the number UP and DOWN.

9. Align the cursor with the MODE and set with the ◀/▶ button.

| PROGRAM MENU |       |       |       |
|--------------|-------|-------|-------|
| DATE         | ON    | OFF   | MODE  |
| OCT30        | 10:10 | 13:00 | VIDEO |
| JAN01        | 22:15 | 24:00 | INV   |
| MON*         | 15:45 | 19:00 | VIDEO |
| WED*         | 09:00 | 11:00 | RGB1  |
| THU*         | 08:15 | 10:00 | RGB2  |
| *            | 13:30 | 14:30 | VIDEO |
| *            | 21:00 | 22:00 | RGB1  |

- \* The left and right buttons change the following input modes: VIDEO, RGB1 through RGB3, INV

**Note:** In the INV selection, the input mode starts up in the last memory.

INV provides an inverse video screen display for reducing burn-in. The input mode at this time will be the input mode of the last memory.

10. Return to the main menu

EXIT



- \* To delete the main menu, press the EXIT button once more.
- \* When the cursor is in the DATE position, a press of the remote control CLEAR button will clear only that program.  
(The CLEAR button is valid only when the cursor is in the DATE position.)
- \* The function can be used in up to 7 programs and the program contents of a program will be deleted after exiting the program.
- \* When the Timer function is set, the POWER/STANDBY indicator is blinking orange at intervals of 3 seconds.

### Multiple Screens


Select the screen mode from among 1, 2, or 4 screens.  
(Normally 1 is selected.)

VIDEO WALL can be achieved from two or four screens with the sole use of the main unit.

For information about compatible signals, see the Signal Preset Table of factory setting values on Page 49.


#### 1. Align the cursor with icon (12) on the second page

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

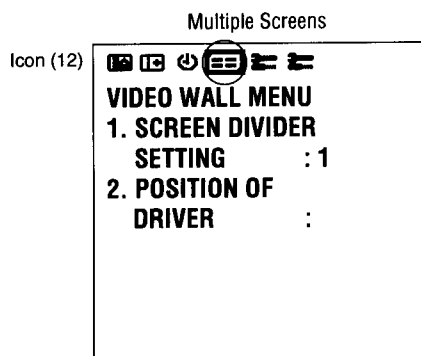

#### 2. Align the cursor using ▲ / ▼ buttons with the SCREEN DIVIDER SETTING and use the ◀/▶ buttons to select 1 screen, 2 screens, or 4 screens.

Use the left and right cursors to change the setting between 1 → 2 → 4 → in toggle fashion. (The initial value is 1.)

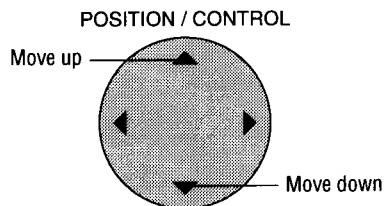

#### Screen selection:

2 Screens

|      |
|------|
| No.5 |
| No.6 |

4 Screens


|      |      |
|------|------|
| No.1 | No.2 |
| No.4 | No.3 |

#### 3. Align the cursor with POSITION OF SETTING and set with the ◀/▶ buttons.

Nothing will be displayed when "1" is selected in the SCREEN WALL MENU.

When "2" is selected, the icon of the right screen is displayed.


There is no selection for the initial value.



When "4" is selected, the icon of the right screen is displayed.

Use the right cursor button to go clockwise and select screen 1 from among the 4 screens. Set the number to "1" at the upper left, and display "1 to 4" going clockwise.

There is no selection for the initial value.



#### 4. Return to the main menu




\* To delete the main menu, press the EXIT button once more.

## Other Setting Screens (1)


This allows the following settings: WIDE MODE, COLOR SYSTEM, RGB MODE, POWER ON MODE, POWER MANAGER, EXTERNAL CONTROL, HDTV SELECT, and ALL RESET.

### 1. Align the cursor with icon (13) of the second page.

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

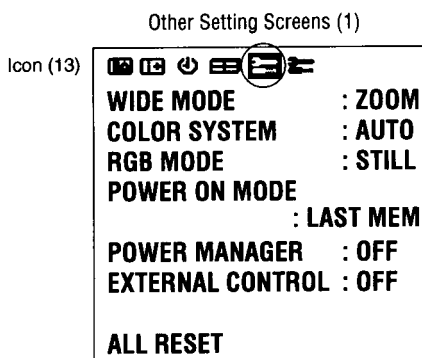

### 2. Align the cursor with the desired item

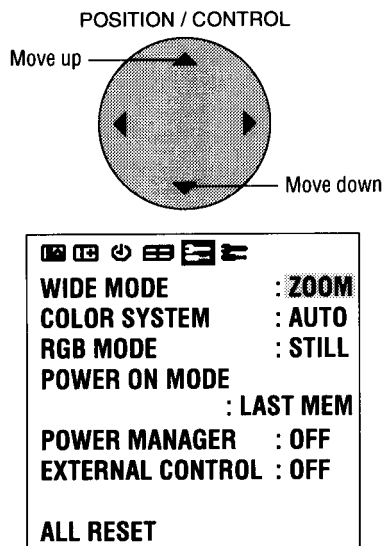

### 3. Press the ◀/▶ buttons and set

\* The ◀/▶ buttons are used to switch the various items in toggle fashion as described below.

#### \* WIDE MODE:

NORMAL/FULL/STADIUM/ZOOM (Initial value: NORMAL)

Note that only NORMAL/FULL area available in RGB mode.

#### \* COLOR SYSTEM:

AUTO/3.58 NTSC/PAL/SECAM/4.43 NTSC (Initial value: AUTO)

#### \* RGB MODE:

RGB MODE is displayed at the time of RGB input, RGB MODE is not displayed at the time of video input.

Initial value : STILL

At time of RGB input

[MOTION]: Set when a scan converter or other moving picture has been connected

[STILL]: Set when displaying a personal computer screen

[DTV]: Set when using digital broadcast or other sources with an RGB input

This is used in signal discrimination at the time of RGB input.

**Note:** When a moving picture is displayed in still picture mode, the screen will appear blurry.

#### \* POWER ON MODE:

LAST MEM/VIDEO/RGB1/RGB2/RGB3 (Initial value: LAST MEM (Last Memory))

#### \* POWER MANAGER:

This means Power management of RGB input ON/OFF (Initial value is OFF)

#### \* EXTERNAL CONTROL:

OFF/1/2 (Initial value is OFF)

RS-232C can be used when "1" selected.

Open/Short control can be used when "2" is selected.

### 4. Return to the main menu

EXIT




\* To delete the main menu, press the EXIT button once more.

## Other Setting Screens (2)



This allows the following settings: LONG LIFE MODE 1/2, GRAY LEVEL, SET ID NO, and ALL RESET.

### 1. Align the cursor with icon (14) of the second page.

The cursor is moved left and right with the POSITION CONTROL ◀/▶ buttons.

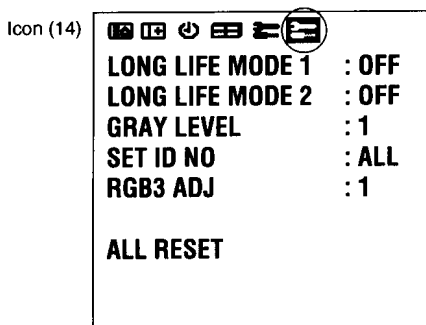

### 2. Align the cursor with the desired item

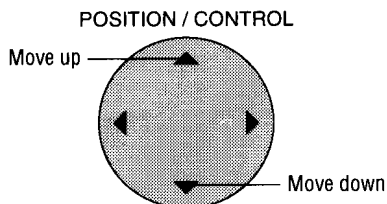

### Notice - About RGB3 ADJ

If the image is not stable when in the RGB3 input mode, switch the "RGB3 ADJ" number to 2 or 3. (Select the mode at which the display is stable.)

The display position will change when the number is changed; therefore, when using the unit with "AUTO PICTURE" ON, switch it OFF and then back ON again to return the display position to its original location.

When using the unit with "AUTO PICTURE" OFF, please perform the display position adjustment again.

### 3. Press the ▲ / ▼ buttons and set

Select the various items with the left and right buttons

#### Burning reduction function

\* LONG LIFE MODE 1: Switched ON/OFF with the left and right buttons. (Initial value is OFF) → Holds down the brightness of the screen.

\* LONG LIFE MODE 2: Switched ON/OFF with the left and right buttons. (Initial value is OFF) → Moves the screen up, down, left, and right at fixed times.

**Note:** The long life mode is designed to extend the service life of the plasma panel and reduce ghost images. It is not meant to prevent ghost images.

**LONG LIFE MODE 2 cannot be set with multiple screens operation.**

\* GRAY LEVEL: Select 1 to 3 with the left and right buttons. (Initial value is 1) → Adjusts the brightness of the non-displayed portion of the screen.

\* SET ID No.: Select 1 to 256 with the left and right buttons. (Initial value is ALL) → Displays ALL with the remote control or CLEAR button.

**Note:** Selecting ALL RESET and pressing the PROCEED button will display a warning screen and pressing "PROCEED" further will change all the settings of this screen to the initial values.

### 4. Return to the main menu


EXIT



\* To delete the main menu, press the EXIT button once more.

\* Align the cursor with icon (9) at the very top to move to the first page menu screen.

Previous Page Screen

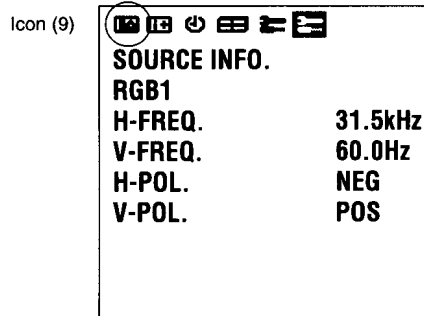

## Set Selection Screen for Allotting ID Numbers to Multiple Screens/Each Set

This sets the VIDEO WALL NO. and SET ID NO.

### ID Selection Screen

#### Press the EXIT button twice.

Press the EXIT button once to return to the main menu.  
To delete the main menu, press the button once more.


#### 1. Press the ID SELECT button of the remote control

This displays the ID selection screen.



- \* This function prevents multiple sets from being controlled at the same time when ID numbers have been set to multiple screens/multiple sets and the remote control is being used.
- \* Only sets with ID numbers that have been set with this menu can be controlled. Note that the ID SELECT button is valid regardless of the ID.
- \* This function is also valid when this set is controlled via the RS-232C connector.


#### 2. Align the cursor with the desired item

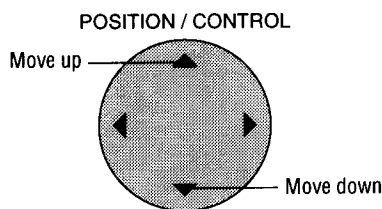

ID Selection Screen

| ID SELECT MENU |       |
|----------------|-------|
| VIDEO WALL NO  | : 1   |
| SET NO         | : 256 |

#### 3. Set to the desired value

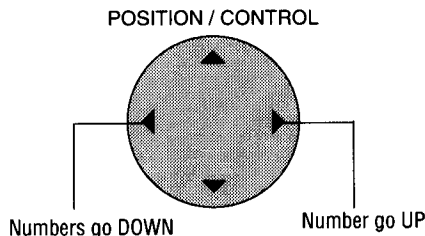

#### VIDEO WALL No.

- \* The POSITION CONTROL ◀/▶ buttons are used to switch the numbers from 1 through 6.
- \* A press of the remote control CLEAR button causes a reset. (Initial value is ALL)

#### SET ID No.

- \* The POSITION CONTROL ◀/▶ buttons are used to enter numbers from 1 through 256. Note that entry of numbers higher than 256 is not possible.
- \* A press of the remote control CLEAR button causes a reset. (Initial value is ALL)

**Note:** When both ID numbers have been set, the priority order will be as described below.  
**VIDEO WALL > SET ID**

#### 4. Return to the main menu



The display will go off when the EXIT button is pressed or when the DISPLAY TIME setting time has elapsed.

# Troubleshooting

If the picture quality is poor or there is some other problem, check the adjustments, operations, etc., before requesting service.

| Symptom                                                                                | Checks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Remedy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture is disturbed.<br>Remote control unit operates erroneously.                     | <ul style="list-style-type: none"> <li>Is a connected component set directly in front or at the side of the display?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>Leave some space between the display and the connected components.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Monitor's power does not turn on when the remote controller's power button is pressed. | <ul style="list-style-type: none"> <li>Is the monitor's power cord plugged into a power outlet?</li> <li>Are all the monitor's indicators off?</li> <li>Has an ID number been set for the main unit?</li> <li>Are the remote controller's batteries worn out?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>Plug the monitor's power cord into a power outlet.</li> <li>Press the power button on the monitor to turn on the power.</li> <li>Set an ID number with the ID SELECT button, or set the ID number to ALL.</li> <li>Replace both batteries with new ones.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Monitor does not operate when the remote controller's buttons are pressed.             | <ul style="list-style-type: none"> <li>Is the remote controller pointed at the monitor, or is there an obstacle between the remote controller and the monitor?</li> <li>Is direct sunlight or strong artificial light shining on the monitor's remote control sensor?</li> <li>You are not within the effective operating range.(Wireless)</li> <li>Incorrect setting of DIP SW (Wireless)<br/>When in the EXT.CONTROL mode, the remote control unit will not operate the monitor.<br/>The remote cable is plugged into the REMOTE IN terminal (Wireless).</li> <li>Is the EXTERNAL CONTROL setting 1 or 2?</li> <li>Has an ID number been set for the main unit?</li> <li>Are the remote controller's batteries worn out?</li> <li>The front panel buttons of the main unit do not function</li> </ul> | <ul style="list-style-type: none"> <li>Point the remote controller at the monitor's remote control sensor when pressing buttons, or remove the obstacle.</li> <li>Eliminate the light by closing curtains, pointing the light in a different direction, etc.</li> <li>Use the remote control unit within 30° left and right of center (at a distance of 22ft).</li> <li>Set Pin No.2 to ON.<br/>Unplung the remote cable from the monitor.</li> <li>Use the remote control to set the EXTERNAL CONTROL to OFF.</li> <li>Set an ID number with the ID SELECT button, or set the ID number to ALL.</li> <li>Replace both batteries with new ones.</li> <li>The front panel buttons do not function during Control Lock</li> </ul> |
| No Picture is produced.                                                                | <ul style="list-style-type: none"> <li>Is the monitor's power cord plugged into a power outlet?</li> <li>Power outlet inactive.<br/>Power of external equipment is not ON.<br/>External equipment has been incorrectly connected.<br/>Incorrect input selection.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Plug the monitor's power cord into a power outlet.</li> <li>Be sure wall switch is on and outlet has power. Switch to ON or connect to an active AC outlet. Correct all connections. Press correct RGB1, RGB2, RGB3, or VIDEO button.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Poor picture with VIDEO signal input.                                                  | <ul style="list-style-type: none"> <li>Improper control setting.<br/>Local interference.<br/>Cable interconnections.<br/>Input impedance is not correct level.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Adjust picture controls as needed. Try another location for the monitor. Be sure all connections are secure.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Poor picture with RGB signal input.                                                    | <ul style="list-style-type: none"> <li>Improper control setting.<br/>Incorrect 15 PIN connector pin connections.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Adjust picture controls as needed. Check pin assignments and connections.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Tint is poor or colors are weak.                                                       | <ul style="list-style-type: none"> <li>Are the tint and colors properly adjusted?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Adjust the tint and color.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Nothing appears on screen.                                                             | <ul style="list-style-type: none"> <li>Is the computer's power turned on?</li> <li>Is a source connected?</li> <li>Is the power manager function in the standby or off mode?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>Turn on the computer's power.</li> <li>Connect source to the monitor.</li> <li>Operate the computer (move the mouse, etc.)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Part of picture is cut off or picture is not centered.                                 | <ul style="list-style-type: none"> <li>Is the position adjustment appropriate?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Adjust the "RGB ADJ." properly.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Image is too large or too small.                                                       | <ul style="list-style-type: none"> <li>Is the screen size adjustment appropriate?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Make the adjustment with the wide screen setting.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Picture is unstable.                                                                   | <ul style="list-style-type: none"> <li>Is the computer's resolution setting appropriate?</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>Set to the proper resolution.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| POWER/STANDBY indicator is lighted in orange or yellow.                                | <ul style="list-style-type: none"> <li>Horizontal and/or vertical sync signal is not present when the Intelligent Power Manager control is on.</li> <li>POWER/STANDBY indicator is flashing red</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Check the input signal.</li> <li>The unit is OFF in the timer operation; this is not a malfunction.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| POWER/STANDBY indicator is blinking in green.                                          | <ul style="list-style-type: none"> <li>The temperature inside the main unit has become too high and has activated the protector.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Promptly switch off the power of the main unit and wait until the internal temperature drops.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

In the following case, power off the monitor immediately and contact your dealer or authorized NEC Service Center.

The monitor turns off in 5 seconds after powering on and then the POWER/STANDBY indicator blinks. It indicates that the power supply circuit or, one more fans have been damaged.

## Overheat protector

If the monitor becomes too hot, the overheat protector will be activated and the monitor will be turned off. If this happens., turn off the power to the monitor and unplug the power cord. If the room where the monitor is installed is particularly hot, move monitor to a cooler location, and wait for the monitor to cool for 60 minutes. If the problem persists, contact your NEC dealer for service.

# Specifications

|                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Plasma Screen</b>                                                    | 42 inch Visual size (Diagonal), AC Drive type<br>Aspect ratio : 16:9<br>Optical filter coating<br>Display color : 16,770,000 colors 256 levels                                                                                                                                                                                                                                                                                                                         |
| <b>RGB Input Terminals</b>                                              | RGB 1 : mini D-SUB 15pin<br>RGB 2 : BNC (R,G,B, H/CS and V)<br>RGB 3 : Digital RGB (DVI 24+5pin: Not compatible with analog input.<br>Complies with DVI<br>Video : Analog 0.7Vp-p/75 Ohms (Positive)<br>: Sync. : Separate Sync. TTL level, 0.7 - 4.0Vp-p/75 Ohms.....BNC only<br>Horizontal Sync. (Positive/Negative)<br>Vertical Sync. (Positive/Negative)<br>: Composite Sync. TTL Level (Positive/Negative)<br>: Composite Sync. On Green Video 0.3Vp-p (Negative) |
| <b>RGB Output Terminals<br/>THROUGH OUT</b>                             | BNC (R,G,B, H/CS and V)<br>RGB THROUGHOUT (RGB2 only)                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Video Input Terminals<br/>VIDEO<br/>S-VIDEO</b>                      | 1.0Vp-p, 75 Ohms unbalanced (BNC-Jack), Composite video signal, Sync-negative.<br>Y : 1.0Vp-p, 75 Ohms unbalanced, Sync-negative.<br>C : 0.28Vp-p, 75 Ohms unbalanced, Color burst level.                                                                                                                                                                                                                                                                              |
| <b>Video Output Terminals<br/>THROUGH OUT<br/>THROUGH OUT (S-VIDEO)</b> | 1.0Vp-p, 75 Ohms unbalanced (BNC Jack), Composite video signal, Sync-negative.<br>Y : 1.0Vp-p, 75 Ohms unbalanced, Sync-negative.<br>C : 0.28Vp-p, 75 Ohms unbalanced, Color burst level.                                                                                                                                                                                                                                                                              |
| <b>External Control<br/>(IN/THROUGH OUT)</b>                            | mini D-SUB 15pin (IN/THROUGH OUT)<br>Open/Short, RS-232C Control                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Synchronization Range</b>                                            | Horizontal : 15.5 to 63.98 KHz (automatic : step scan)<br>Vertical : 46.0 to 85.0 Hz (automatic : step scan)                                                                                                                                                                                                                                                                                                                                                           |
| <b>Maximum Resolution</b>                                               | RGB : 853(H) X 480(V) pixels                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Power Supply</b>                                                     | 100-120 VAC, 50/60 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Current Rating</b>                                                   | 5.6A (maximum)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Power consumption</b>                                                | 430W (typical)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Dimensions</b>                                                       | 39.3(W) x 23.4(H) x 4.5(D) inches / 998(W) X 595(H) X 114(D) mm                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Weight</b>                                                           | 15.0lbs/33kg                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Environmental Considerations</b>                                     | Operating Temperature : 0°C to 40°C<br>Humidity : 20 to 80%<br>Altitude : 0 to 6233 feet(1900m)<br>Storage Temperature : -10°C to 50°C<br>Humidity : 10 to 90%<br>Altitude : 0 to 9842 feet(3000m)                                                                                                                                                                                                                                                                     |
| <b>Regulations :</b>                                                    | UL/C-ULApproved (UL 1950/CSA 950)<br>DOC Canada requirements<br>Meets FCC class A requirements                                                                                                                                                                                                                                                                                                                                                                         |

All specifications are subject to change without notice.

# Appendix

## Signal Identification For Raster Preset

| Resolution<br>(horizontal frequency/vertical frequency) | Factory<br>settings | User<br>settings | Sync polarity |     | Presence/absence of sync |     | RGB<br>MODE | MODE   |
|---------------------------------------------------------|---------------------|------------------|---------------|-----|--------------------------|-----|-------------|--------|
|                                                         |                     |                  | Hor           | Ver | Hor                      | Ver |             |        |
| VIDEO NTSC*1                                            | ○                   | ○                | -             | -   |                          |     | -           | -      |
| VIDEO PAL*1 VIDEO SECAM*1                               | ○                   | ○                | -             | -   |                          |     | -           | -      |
| 640 X 240 (15.734kHz/59.94Hz) VU-6010 NTSC*2            | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | NORMAL |
| 768 X 288 (15.557kHz/50.39Hz) VU-6010 PAL*2             | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 640 X 400 (31.469kHz/70.086Hz) IBM 400@70Hz*3           | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 640 X 480 (31.469kHz/59.94Hz) VESA 480@60Hz             | ○                   | ○                | NEG           | NEG | Y                        | Y   | STILL       | NORMAL |
| 640 X 480 (35kHz/66.667Hz) MAC @13"*6                   | ○                   | ○                | POS/NEG       |     | Y/N                      | N   | -           | -      |
| 640 X 480 (37.861kHz/72.809Hz) VESA 480@72Hz            | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 640 X 480 (37.5kHz/75Hz) VESA 480@75Hz                  | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 640 X 480 (43.269kHz/85.008Hz) VESA 480@85Hz*4          | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 640 X 480 (39.375kHz/75Hz) XGA-2 480@75Hz               | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 800 X 600 (35.156kHz/56.25Hz) VESA 600@56Hz             | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 800 X 600 (37.879kHz/60.31Hz) VESA 600@60Hz             | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 800 X 600 (48.077kHz/72.188Hz) VESA 600@72Hz            | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 800 X 600 (46.875kHz/75Hz) VESA 600@75Hz                | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 800 X 600 (53.674kHz/85.061Hz) VESA 600@85Hz*4          | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 832 X 624 (49.725kHz/74.55Hz) MAC @16"*6                | ○                   | ○                | POS/NEG       |     | Y/N                      | N   | -           | -      |
| 852 X 480 (31.722kHz/59.966Hz) I/O data wide*5          | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | WIDE   |
| 848 X 480 (31.02kHz/60Hz) VGA WIDE (NEC1)               | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 1024 X 768 (56.476kHz/70.069Hz) VESA 768@70Hz           | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 1024 X 768 (60.023kHz/75.029Hz) VESA 768@75Hz           | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 1024 X 768 (68.677kHz/84.997Hz) VESA 768@85Hz*4         | ○                   | ○                | POS           | POS | Y                        | Y   | -           | -      |
| 1024 X 768 (60.24kHz/74.93Hz) MAC @19"*6                | ○                   | ○                | POS/NEG       |     | Y/N                      | Y   | -           | -      |
| 768 X 576 (31.389kHz/50Hz) IDC-3000G PAL625P            | ○                   | ○                | NEG           | NEG | Y                        | Y   | -           | -      |
| 640 X 480 (31.47kHz/59.9Hz) IDC-3000G NTSC 525P         | ○                   | ○                | NEG           | NEG | Y                        | Y   | MOTION      | NORMAL |

\*1 Convert to 640 dots x 480 lines and display.

\*2 These signals cannot be displayed in the RGB3 input mode.

\*3 Display only 400 lines with the screen center of the vertical orientation located at the center.

\*4 The picture will be shaky when the moving images of video games, etc., are input. (In this case set the refresh rate to 75 kHz or less.)

\*5 Only when using an I/O DATA graphic accelerator board.

\*6 Use a separately sold signal adapter (mini D-Sub 15-pin) when connecting to a Macintosh computer.

For some models, make the mini D-Sub 15-pin connection using the included RGB signal cable.

\*7 Make the settings to display these signals. The signals will not be displayed properly unless the correct settings are made.

\*The resolution deteriorates in comparison with the original image because the image of 640 dots x 480 lines is converted to 853 dots x 480 lines and displayed.


\*At the time of video input, video signals derived from poor recording conditions may give rise to a disturbed screen image.

\*The sync may be disturbed when non standard signals other than the aforementioned are input.

\*Multiple screens (2 screens) can only display signals having an aspect ratio of 4:3. \*3 Cannot be used with multiple screens.

\*With digital inputs some signals are not accepted.

## Pin Configuration and Signal Level of mini D-Sub 15-Pin (Analog) Input Connector



Signal level  
VIDEO signal : 0.7Vp-p (Analog)  
Sync signal : TTL level

| Pin No. | Signal (Analog)              |
|---------|------------------------------|
| 1       | Red                          |
| 2       | Green or sync-on-green       |
| 3       | Blue                         |
| 4       | Ground                       |
| 5       | Ground                       |
| 6       | Red ground                   |
| 7       | Green ground                 |
| 8       | Blue ground                  |
| 9       | No connection                |
| 10      | Sync signal ground           |
| 11      | Ground                       |
| 12      | Bi-directional DATA (SDA)    |
| 13      | Horizontal or composite sync |
| 14      | Vertical sync                |
| 15      | Data clock                   |

## Pin Configuration and Signal of the RGB 3 IN Connector (DVI Connector)

The unit is equipped with a type of connector commonly used for both analog and digital.  
(Functionally, this cannot be used for analog input.)  
(TMDS can be used for one link only)



| Pin No. | Signal (Digital)      |
|---------|-----------------------|
| 1       | T.M.D.S Data 2 -      |
| 2       | T.M.D.S Data 2 +      |
| 3       | T.M.D.S Data 2 Shield |
| 4       | No connection         |
| 5       | No connection         |
| 6       | DDC Clock             |
| 7       | DDC Data              |
| 8       | No connection         |
| 9       | T.M.D.S Data 1 -      |
| 10      | T.M.D.S Data 1 +      |
| 11      | T.M.D.S Data 1 Shield |
| 12      | No connection         |
| 13      | No connection         |
| 14      | +5V Power             |
| 15      | Ground                |
| 16      | Hot Plug Detect       |
| 17      | T.M.D.S Data 0 -      |
| 18      | T.M.D.S Data 0 +      |
| 19      | T.M.D.S Data 0 Shield |
| 20      | No connection         |
| 21      | No connection         |
| 22      | T.M.D.S Clock Shield  |
| 23      | T.M.D.S Clock +       |
| 24      | T.M.D.S Clock -       |
| 25      | No connection         |
| 26      | No connection         |
| 27      | No connection         |
| 28      | No connection         |
| 29      | No connection         |


## Function and Pin Configuration of the External Control Connector

### Application

These specifications are applicable to NEC plasma monitors (including 42- and 50-inch types) and communications control from external equipment.

### Connections


Connections should be made as described below.

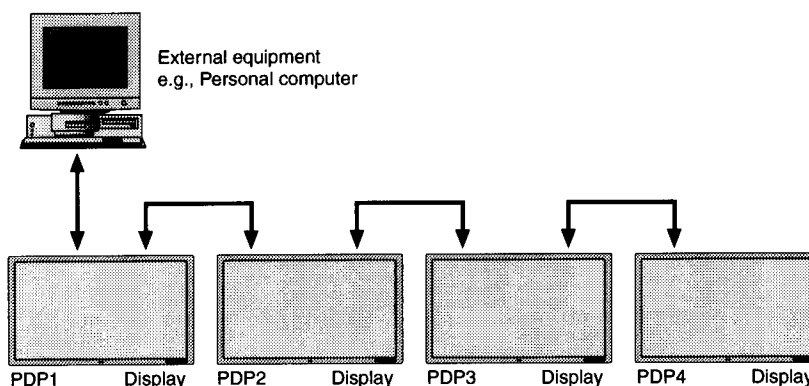

\*A maximum of 4 units can be used with a cascade connection.

#### 1) Display-side connector: EXTERNAL CONTROL connector

##### EXTERNAL CONTROL



| Pin No.  | Function                                                                                                                                                                                                                                                                                                                                                                          | Open       | Established |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------|------------|-------|------|------|------|--------|------|------|------|--------|------|--------|--------|--|--|
| 1 to 3   | Not used                                                                                                                                                                                                                                                                                                                                                                          |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 4        | Power ON/OFF                                                                                                                                                                                                                                                                                                                                                                      | ON         | OFF         |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 5 and 14 | Input switching<br>The input mode is switched by the combination of pin numbers 5 and 14.<br><table><tr><th>Input</th><th>Pin No. 5</th><th>Pin No. 14</th></tr><tr><td>VIDEO</td><td>Open</td><td>Open</td></tr><tr><td>RGB1</td><td>Ground</td><td>Open</td></tr><tr><td>RGB2</td><td>Open</td><td>Ground</td></tr><tr><td>RGB3</td><td>Ground</td><td>Ground</td></tr></table> | Input      | Pin No. 5   | Pin No. 14 | VIDEO | Open | Open | RGB1 | Ground | Open | RGB2 | Open | Ground | RGB3 | Ground | Ground |  |  |
| Input    | Pin No. 5                                                                                                                                                                                                                                                                                                                                                                         | Pin No. 14 |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| VIDEO    | Open                                                                                                                                                                                                                                                                                                                                                                              | Open       |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| RGB1     | Ground                                                                                                                                                                                                                                                                                                                                                                            | Open       |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| RGB2     | Open                                                                                                                                                                                                                                                                                                                                                                              | Ground     |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| RGB3     | Ground                                                                                                                                                                                                                                                                                                                                                                            | Ground     |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 6 to 8   | Not used                                                                                                                                                                                                                                                                                                                                                                          |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 9 and 10 | Ground                                                                                                                                                                                                                                                                                                                                                                            |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 11       | TXD (RS-232C)                                                                                                                                                                                                                                                                                                                                                                     |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 12       | RTS                                                                                                                                                                                                                                                                                                                                                                               |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 13       | RXD (RS-232C)                                                                                                                                                                                                                                                                                                                                                                     |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |
| 15       | CTS                                                                                                                                                                                                                                                                                                                                                                               |            |             |            |       |      |      |      |        |      |      |      |        |      |        |        |  |  |


#### 2) External equipment side connector: Serial port (RS-232C) connector

See the specifications of the connected equipment for information about the type of connector and pin assignment.

## Communication Parameters

- |                          |              |
|--------------------------|--------------|
| (1) Communication system | Asynchronous |
| (2) Interface            | RS-232C      |
| (3) Baud rate            | 9600 bps     |
| (4) Data length          | 8 bits       |
| (5) Parity               | Odd          |
| (6) Stop bit             | 1 bit        |
| (7) Communication code   | Hex          |

## Communication Format

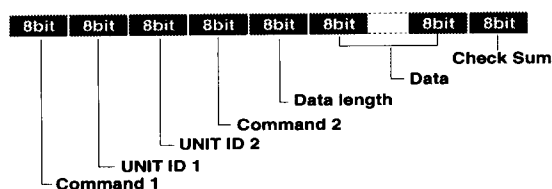

### Command 1

Together with Command 2, this is a number that distinguishes the various commands.

For ACK, when bit 2 and bit 3 are both "1", reception of a supported command or data is indicated. When bit 2 is "0", reception of an unsupported command or data is indicated.

Bit 0 and bit 1 should be set as described below.

| bit0 | bit1 |                                    |
|------|------|------------------------------------|
| 0    | 0    | When multiple screens are selected |
| 0    | 1    | Not used                           |
| 1    | 0    | At time of set ID selection        |
| 1    | 1    | At time of regular use             |

### Unit ID 1 and Unit ID 2

- Unit ID1: Sets a number corresponding to the various sets ID (1 through 6) when multiple screens are selected, and to 1 through 256 at the time of set ID selection. "00H" must be output when the ID is not set.
- Unit ID2: Makes settings on the occasion of simultaneously operating all sets connected in cascade at the time of multiple screen mode and at the time of set ID selection.

Selection of all sets: FFH  
At time of regular setting: 00H


### Command 2

Together with Command 1, this is a number that distinguishes the various commands.

## Check Sum (CKS), Error Processing, and ACK


- Checks for receive data incorporate both the following checksum and RS-232C (odd) parity.  
The checksum comprises the following aspects of one transmitted or received frame: Command 1, Unit 1 and 2, Command 2, data length, and the lower order 8 bits of the total data.

### Check Sum Example

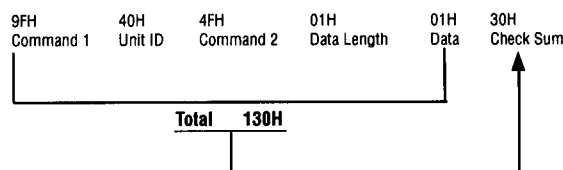

- Error Processing
  - When the communications interval is 4 ms or greater, the arrival of a subsequent Command 1 will be recognized. If meaningful data cannot be discerned at this time, that data will not be recognized.
  - When the receive data error, checksum error, and the receive data could not all be taken in, ACK is not returned.
- Returning an ACK  
When command processing exceeds 0.5 seconds following command reception, an ACK1 for which bit 3 of Command 1 has been set to "0" (during command processing) is returned every 0.5 seconds until command processing is completed. When command processing is completed, an ACK2 for which bit 3 of Command 1 has been set to "1" (at the end of command processing) is returned every 0.5 seconds until command processing is completed. Bit 1 of Command 1 is set to 0 ; when the UA2 setting is FFH, it becomes possible to simultaneously operate all sets connected in cascade and as a result, ACK is not returned.

## Communications Flow

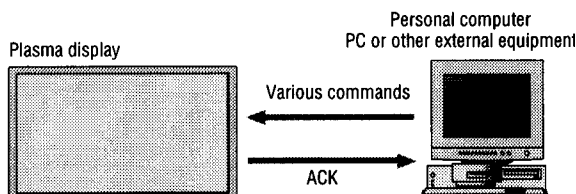

When various commands are sent from a personal computer (PC) or other external equipment, the display is always ready to receive them.

Note that resending of the command is recommended when an ACK is not returned from the display within 1.5 seconds.

## Command Reference List

|                          | CMD1 | CMD2 | LEN |
|--------------------------|------|------|-----|
| 01. Connect Request      | 4FH  | 39H  | 01H |
| 02. Running Sense        | 4FH  | 88H  | 00H |
| 03. Power ON             | 8FH  | 4EH  | 00H |
| 04. Power OFF            | 8FH  | 4FH  | 00H |
| 05. Input Switch Change  | CFH  | 50H  | 01H |
| 06. COLOR TEMP SELECT    | CFH  | 00H  | 01H |
| 07. RED Gain Data        | CFH  | 10H  | 04H |
| 08. GREEN Gain Data      | CFH  | 11H  | 04H |
| 09. BLUE Gain Data       | CFH  | 12H  | 04H |
| 10. GAMMA Gain Data      | CFH  | 13H  | 03H |
| 11. COLOR Gain Data      | CFH  | 14H  | 03H |
| 12. TINT Gain Data       | CFH  | 15H  | 03H |
| 13. SHARPNESS Gain Data  | CFH  | 16H  | 03H |
| 14. CONTRAST Gain Data   | CFH  | 17H  | 03H |
| 15. BRIGHT Gain Data     | CFH  | 18H  | 03H |
| 16. V.POS Gain Data      | CFH  | 19H  | 03H |
| 17. H.POS Gain Data      | CFH  | 1AH  | 04H |
| 18. PHASE Gain Data      | CFH  | 1BH  | 03H |
| 19. CLOCK Gain Data      | CFH  | 1CH  | 03H |
| 20. H POS2 GAIN DATA     | CFH  | 1EH  | 03H |
| 21. V POS2 GAIN DATA     | CFH  | 1DH  | 03H |
| 22. V-HEIGHT Gain Data   | CFH  | 1FH  | 03H |
| 23. H-WIDTH Gain Data    | CFH  | 20H  | 03H |
| 24. TIMER SWITCH         | CFH  | 02H  | 01H |
| 25. AUTO PICTURE Select  | CFH  | 57H  | 02H |
| 26. RESET                | 0FH  | 54H  | 01H |
| 27. COLOR SYSTEM SELECT  | CFH  | 5CH  | 01H |
| 28. INPUT MODE Request   | 0FH  | 41H  | 00H |
| 29. SCREEN MODE Request  | 0FH  | 42H  | 00H |
| 30. VIDEO ADJ Request    | 0FH  | 45H  | 00H |
| 31. SCREEN ADJ Request   | 0FH  | 47H  | 00H |
| 32. COLOR SYSTEM Request | 0FH  | 4CH  | 00H |
| 33. FAILURE MODE Request | 0FH  | 3FH  | 00H |
| 34. SET CONDITION Info   | 0FH  | 40H  | 00H |
| 35. SIGNAL Info          | 0FH  | 3EH  | 00H |
| 36. SETTING MODE SELECT  | CFH  | 04H  | 02H |
| 37. SCREEN MODE Select   | CFH  | 51H  | 01H |
| 38. PICTURE Mute On      | 8FH  | 3CH  | 00H |
| 49. PICTURE Mute Off     | 8FH  | 3DH  | 00H |
| 40. MULTI MODE SETTING   | CFH  | 03H  | 02H |
| 41. MULTI MODE Request   | 0FH  | 3BH  | 00H |
| 42. OSM SELECT           | DFH  | 58H  | 01H |

### 01. Connect Request

#### Function

The external control equipment requests a communications connection from the display.

When the display has received this command, it returns an ACK to the external control equipment and notifies that the connection is completed.

#### Transmission Data

4 FH UA1 UA2 39H 01H 00H CKS

CKS: Checksum

#### ACK

0 FH UA2 UA2 39H 00H CKS

### 02. Running Sense

#### Function

The external control equipment ascertains the power supply condition of the display and then causes the display to recognize the PC CONTROL connection.

#### Transmission Data

4 FH UA1 UA2 88H 00H CKS

#### ACK

0 FH UA1 UA2 88H 01H DATA CKS

DATA: Bit 0 : Connect Condition

0 : No connection

1 : Connected

Bit 1

0 : Fixed

1 : -

Bit 2 : Power Status

0 : POWER ON

1 : POWER OFF (STANBY)

Bit 3

0 : Fixed

1 : -

Bit 4

0 : Fixed

1 : -

Bit 5

0 : Fixed

1 : -

Bit 6

0 : Fixed

1 : -

Bit 7

0 : Fixed

1 : -

### 03. Power ON

#### Function

The external control equipment switches on the power of the display.

#### Transmission Data

8 FH UA1 UA2 4E 00H CKS

#### ACK

The display returns the following ACK when the power is switched on:

2 FH UA1 UA2 4E 00H CKS

### 04. Power OFF

#### Function

The external control equipment switches off the power of the display.

#### Transmission Data

8 FH UA1 UA2 4F 00H CKS

#### ACK

The display returns the following ACK when the power is switched off:

2 FH UA1 UA2 4F 00H CKS

### 05. Input Switch Change

#### Function

The external control equipment switches the input of the display.

## Transmission Data

CFH UA1 UA2 50H 01H DATA CKS  
DATA : Input Select  
01H: Video  
07H: RGB1  
08H: RGB2  
0CH: RGB3

## ACK

The display returns the following ACK when the input is switched:  
2FH UA1 UA2 50H 00H CKS

## 06. COLOR TEMP SELECT

### Function

The external control equipment changes the COLOR TEMP of the display.

## Transmission Data

CFH UA1 UA2 00H 01H DATA00 CKS  
DATA00  
00H: HIGHT  
01H: LOW  
02H: USER

## ACK

6FH UA1 UA2 00H 01H DATA00 CKS  
DATA00:  
00H: HIGHT  
01H: LOW  
02H: USER

**Notes** When HIGHT or LOW is selected with COLOR TEMP, changes of the R/G/B GAIN data on the next page will not be received.

## 07. RED Gain Data

### Function

The external control equipment changes the RED gain data of the display. (This command will be received only when COLOR TEMP is set by the USER.)

## Transmission Data

CFH UA1 UA2 10H 04H DATA00~DATA03 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: RED Gain Flag 01H  
DATA02: RED Gain E0H: -32  
FFH: -1  
00H: 0  
20H: +32  
DATA03: RED Bias E0H: -32  
FFH: -1  
00H: 0  
20H: +32

## ACK

6FH UA1 UA2 10H 02H DATA00 DATA01 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: RED Gain Flag 01H

## 08. GREEN Gain Data

### Function

The external control equipment changes the GREEN gain data of the display. (This command will be received only when COLOR TEMP is set by the USER.)

## Transmission Data

CFH UA1 UA2 11H 04H DATA00~DATA03 CKS

DATA00: USER PICTURE Gain Flag 01H

DATA01: GREEN Gain Flag 02H

DATA02: GREEN Gain E0H: -32  
FFH: -1  
00H: 0

DATA03: GREEN Bias E0H: -32  
FFH: -1  
00H: 0  
20H: +32

## ACK

6FH UA1 UA2 11H 02H DATA00 DATA01 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: GREEN Gain Flag 02H

## 09. BLUE Gain Data

### Function

The external control equipment changes the BLUE gain data of the display. (This command will be received only when COLOR TEMP is set by the USER.)

## Transmission Data

CFH UA1 UA2 12H 04H DATA00~DATA03 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: BLUE Gain Flag 03H  
DATA02: BLUE Gain E0H: -32  
FFH: -1  
00H: 0  
20H: +32  
DATA03: BLUE Bias E0H: -32  
FFH: -1  
00H: 0  
20H: +32

## ACK

6FH UA1 UA2 12H 02H DATA00 DATA01 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: BLUE Gain Flag 03H

## 10. GAMMA Gain Data

### Function

The external control equipment changes the GAMMA gain data of the display.

## Transmission Data

CFH UA1 UA2 13H 03H DATA00~DATA02 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: Gamma Gain Flag 09H  
DATA02: Gamma Gain 00H: 1  
01H: 2  
02H: 3

## ACK

6FH UA1 UA2 13H 02H DATA00 DATA01 CKS  
DATA00: USER PICTURE Gain Flag 01H  
DATA01: Gamma Gain Flag 09H

### 11. COLOR Gain Data

#### Function

The external control equipment changes the COLOR gain data of the display.

#### Transmission Data

CFH UA1 UA2 14H 03H DATA00~DATA02 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : COLOR Gain Flag 04H

DATA02 : COLOR Gain EAH : -22  
|  
FFH : -1  
00H : 0  
|  
16H : +22

#### ACK

6FH UA1 UA2 14H 02H DATA00 DATA01 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : COLOR Gain Flag 04H

### 12. TINT Gain Data

#### Function

The external control equipment changes the TINT gain data of the display.

#### Transmission Data

CFH UA1 UA2 15H 03H DATA00~DATA02 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : TINT Gain Flag 05H

DATA02 : TINT Gain EAH : -22  
|  
FFH : -1  
00H : 0  
|  
16H : +22

#### ACK

6FH UA1 UA2 15H 02H DATA00 DATA01 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : TINT Gain Flag 05H

### 13. SHARPNESS Gain Data

#### Function

The external control equipment changes the SHARPNESS gain data of the display.

#### Transmission Data

CFH UA1 UA2 16H 03H DATA00~DATA02 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : SHRPNESS Gain Flag 06H

DATA02 : SHRPNESS Gain F0H : -16  
|  
FFH : -1  
00H : 0  
|  
10H : +16

#### ACK

6FH UA1 UA2 16H 02H DATA00 DATA01 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : SHRPNESS Gain Flag 06H

### 14. CONTRAST Gain Data

#### Function

The external control equipment changes the CONTRAST gain data of the display.

#### Transmission Data

CFH UA1 UA2 17H 03H DATA00~DATA02 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : CONTRAST Gain Flag 07H

DATA02 : CONTRAST Gain 00H : 0  
|  
3FH : 63

#### ACK

6FH UA1 UA2 17H 02H DATA00 DATA01 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : CONTRAST Gain Flag 07H

### 15. BRIGHT Gain Data

#### Function

The external control equipment changes the BRIGHT gain data of the display.

#### Transmission Data

CFH UA1 UA2 18H 03H DATA00~DATA02 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : BRIGHT Gain Flag 08H

DATA02 : BRIGHT Gain C0H : -64  
|  
FFH : -1  
00H : 0  
|  
40H : +64

#### ACK

6FH UA1 UA2 18H 02H DATA00 DATA01 CKS  
DATA00 : USER PICTURE Gain Flag 01H

DATA01 : BRIGHT Gain Flag 08H

### 16. V.POSITION Gain Data

#### Function

The external control equipment changes the V. POSITION gain data of the display.

#### Transmission Data

CFH UA1 UA2 19H 03H DATA00~DATA02 CKS  
DATA00 : USER POSITION Gain Flag 03H

DATA01 : V.POSITION Gain Flag 01H

DATA02 : V.POSITION Gain C0H : -64  
|  
FFH : -1  
00H : 0  
|  
40H : +64  
|

#### ACK

6FH UA1 UA2 19H 02H DATA00 DATA01 CKS  
DATA00 : USER POSITION Gain Flag 03H

DATA01 : V.POSITION Gain Flag 01H

### 17. H.POSITION Gain Data

#### Function

The external control equipment changes the H. POSITION gain data of the display.

## Transmission Data

```
CFH UA1 UA2 1AH 03H DATA00~DATA02~CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : H.POSITION Gain Flag      02H
DATA02 : H.POSITION Gain          C0H : -64
|
FFH : -1
00H : 0
|
40H : +64
```

## ACK

```
6FH UA1 UA2 1AH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : H.POSITION Gain Flag      02H
```

## 18. PHASE Gain Data

### Function

The external control equipment changes the clock phase of the display. (This command will be received only when AUTO PICTURE is OFF.)

## Transmission Data

```
CFH UA1 UA2 1BH 03H DATA00 DATA01
DATA02 CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : PHASE Gain Flag          03H
DATA02 : PHASE Gain              00H : 0
|
1FH : 31
```

## ACK

```
6FH UA1 UA2 1BH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : PHASE Gain Flag          03H
```

## 19. CLOCK Gain Data

### Function

The external control equipment changes the division ratio of the display. (This command will be received only when AUTO PICTURE is OFF.)

## Transmission Data

```
CFH UA1 UA2 1CH 03H DATA00~DATA02 CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : CLOCK Gain Flag          04H
DATA02 : CLOCK Gain              E0H : -32
|
FFH : -1
00H : 0
|
20H : +32
```

## ACK

```
6FH UA1 UA2 1CH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    03H
DATA01 : CLOCK Gain Flag          04H
```

## 20. H.POSITION 2 Gain Data

### Function

The external control equipment changes the H. POSITION 2 (screen cut position) data of the display.

## Transmission Data

```
CFH UA1 UA2 1EH 03H DATA00~DATA02 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : H.POSITION Gain Flag      02H
DATA02 : H.POSITION Gain          C0H : -64
|
FFH : -1
00H : 0
|
40H : +64
```

## ACK

```
6FH UA1 UA2 1EH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : H.POSITION2 Gain Flag     02H
```

## 21. V.POSITION 2 Gain Data

### Function

The external control equipment changes the V. POSITION 2 (screen cut position) data of the display.

## Transmission Data

```
CFH UA1 UA2 1DH 03H DATA00~DATA02 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : V.POSITION 2 Gain Flag     01H
DATA02 : V.POSITION 2 Gain          C0H : -64
|
FFH : -1
00H : 0
|
40H : +64
```

## ACK

```
6FH UA1 UA2 1DH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : V.POSITION 2 Gain Flag     01H
```

## 22. V-HEIGHT Gain Data

### Function

The external control equipment changes the V-HEIGHT (horizontal expansion ratio) of the display. (This command will be received only when multi screen is ON.)

## Transmission Data

```
CFH UA1 UA2 1FH 03H DATA00~DATA02 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : V-HEIGHT Gain Flag        03H
DATA02 : V-HEIGHT Gain            80H : -128
|
FFH : -1
0H : 0
|
7FH : +127
```

## ACK

```
6FH UA1 UA2 1FH 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : V-HEIGHT Gain Flag        03H
```

## 23. H-WIDTH Gain Data

### Function

The external control equipment changes the H-WIDTH (vertical expansion ratio) of the display. (This command will be received only when multi screen is ON.)

## Transmission Data

```
CFH UA1 UA2 20H 03H DATA00~DATA02 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : H-WIDTH Gain Flag         04H
DATA02 : H-WIDTH Gain            80H : -128
|
FFH : -1
0H : 0
|
7FH : +127
```

## ACK

```
6FH UA1 UA2 20H 02H DATA00 DATA01 CKS
DATA00 : USER POSITION Gain Flag    09
DATA01 : H-WIDTH Gain Flag         04H
```

## 24. TIMER SWITCH

### Function

The external control equipment changes the timer on/off switching of the display.

### Transmission Data

CFH UA1 UA2 02H 01H DATA00 CKS  
DATA00: 0 RESERVE OFF  
          1 RESERVE ON

### ACK

6FH UA1 UA2 02H 01H DATA00 CKS  
DATA00: 0 RESERVE OFF  
          1 RESERVE ON

## 25. AUTO PICTURE Select

### Function

The external control equipment switches the AUTO PICTURE of the display on and off.

### Transmission Data

CFH UA1 UA2 57H 02H DATA00 DATA01 CKS  
DATA00 01H: AUTO PICTURE ON  
          02H: AUTO PICTURE OFF  
DATA01 01H: MODE NORMAL  
          02H: MODE WIDE

### ACK

6FH UA1 UA2 57H 02H DATA00 DATA01 CKS  
DATA00 01H: AUTO PICTURE ON  
          02H: AUTO PICTURE OFF  
DATA01 01H: MODE NORMAL  
          02H: MODE WIDE

## 26. RESET

### Function

The external control equipment resets the user adjustment items of the display.

### Transmission Data

0FH UA1 UA2 54H 01H DATA00 CKS  
DATA00 00H: ALL NORMAL  
          01H: RASTER NORMAL  
          02H: VISUAL NORMAL

### ACK

2FH UA1 UA2 54H 01H DATA00 CKS  
DATA00 00H: ALL NORMAL  
          01H: RASTER NORMAL  
          02H: VISUAL NORMAL

\*The operation is the same as when the remote control key has been entered.

## 27. COLOR SYSTEM Select

### Function

The external control equipment selects the color system settings of the display.

### Transmission Data

CFH UA1 UA2 5CH 01H DATA00 CKS  
DATA00 01H: NTSC3. 58  
          02H: NTSC4. 43  
          03H: PAL  
          04H: SECAM  
          96H: AUTO

### ACK

6FH UA1 UA2 5CH 01H DATA00 CKS  
DATA00 01H: NTSC3. 58  
          02H: NTSC4. 43  
          03H: PAL  
          04H: SECAM  
          96H: AUTO

## 28. INPUT MODE Request

### Function

The display returns the current status for input mode requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 41H 00H CKS

### ACK

6FH UA1 UA2 41H 01H DATA00 CKS  
DATA00: Input Select  
          01H: Video  
          02H: RGB1  
          03H: RGB2  
          04H: RGB3

## 29. SCREEN MODE Request

### Function

The display returns the current status for screen mode requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 42H 00H CKS

### ACK

6FH UA1 UA2 42H 01H DATA00 CKS  
DATA00 02H: STADIUM  
          03H: ZOOM  
          04H: NORMAL  
          05H: FULL

## 30. VIDEO ADJ Request

### Function

The display returns the current status for video adjustment information requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 45H 00H CKS

### ACK

6FH UA1 UA2 45H 0CH DATA00~DATA0B CKS  
DATA00: RED Gain E0H: -32  
          | FFH: -1  
          00H: 0  
          |  
          20H: +32  
DATA01: GREEN Gain E0H: -32  
          | FFH: -1  
          00H: 0  
          |  
          20H: +32  
DATA02: BLUE Gain E0H: -32  
          | FFH: -1  
          00H: 0  
          |  
          20H: +32  
DATA03: COLOR Gain EAH: -22  
          | FFH: -1  
          01H: 0  
          |  
          16H: +22  
DATA04: TINT Gain EAH: -22  
          | FFH: -1  
          01H: 0  
          |

|                        |           |
|------------------------|-----------|
|                        | FFH : -1  |
|                        | 01H : 0   |
|                        |           |
|                        | 16H : +22 |
| DATA05 : SHRPNESS Gain | F0H : -16 |
|                        |           |
|                        | FFH : -1  |
|                        | 01H : 0   |
|                        |           |
|                        | 10H : +16 |
| ATA06 : CONTRAST Gain  | 00H : 0   |
|                        |           |
|                        | 3FH : 63  |
| DATA07 : BRIGHT Gain   | C0H : -64 |
|                        |           |
|                        | FFH : -1  |
|                        | 00H : 0   |
|                        |           |
|                        | 40H : +64 |
| DATA08 : RED Bias      | E0H : -32 |
|                        |           |
|                        | FFH : -1  |
|                        | 00H : 0   |
|                        |           |
|                        | 20H : +32 |
| DATA09 : GREEN Bias    | E0H : -32 |
|                        |           |
|                        | FFH : -1  |
|                        | 00H : 0   |
|                        |           |
|                        | 20H : +32 |
| DATA0A : BLUE Bias     | E0H : -32 |
|                        |           |
|                        | FFH : -1  |
|                        | 00H : 0   |
|                        |           |
|                        | 20H : +32 |
| DATA0B : Gamma Gain    | 00H : 1   |
|                        | 01H : 2   |
|                        | 02H : 3   |

**Notes** In the currently displayed mode, 00H is output when the memory area of the various items does not exist.

## 31. SCREEN ADJ Request

### Function

The display returns the current status for screen adjustment information requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 47H 00H CKS

### ACK

6FH UA1 UA2 47H 08H DATA00~DATA07 CKS

|                          |           |
|--------------------------|-----------|
| DATA00 : V.POSITION Gain | C0H : -64 |
|                          |           |
|                          | FFH : -1  |
|                          | 00H : 0   |
|                          |           |
|                          | 40H : +64 |
| DATA01 : H.POSITION Gain | C0H : -64 |
|                          |           |
|                          | FFH : -1  |
|                          | 00H : 0   |
|                          |           |
|                          | 40H : +64 |
| DATA02 : PHASE Gain      | 00H : 0   |
|                          |           |
|                          | 1FH : 31  |

|                           |            |
|---------------------------|------------|
| DATA03 : CLOCK Gain       | C0H : -32  |
|                           |            |
|                           | FFH : -1   |
|                           | 00H : 0    |
|                           |            |
|                           | 20H : +32  |
| DATA04 : V.POSITION2 Gain | C0H : -64  |
|                           |            |
|                           | FFH : -1   |
|                           | 00H : 0    |
|                           |            |
|                           | 40H : +64  |
| DATA05 : H.POSITION2 Gain | C0H : -64  |
|                           |            |
|                           | FFH : -1   |
|                           | 00H : 0    |
|                           |            |
|                           | 40H : +64  |
| DATA06 : V-HEIGHT Gain    | 80H : -128 |
|                           |            |
|                           | FFH : -1   |
|                           | 0H : 0     |
|                           |            |
|                           | 7FH : +127 |
| DATA07 : H-WIDTH Gain     | 80H : -128 |
|                           |            |
|                           | FFH : -1   |
|                           | 0H : 0     |
|                           |            |
|                           | 7FH : +127 |

**Notes** In the currently displayed mode, 00H is output when the memory area of the various items does not exist.

## 32. COLOR SYSTEM Request

### Function

The display returns the current status for color system information requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 4CH 00H CKS

### ACK

6FH UA1 UA2 4CH 01H DATA00 CKS  
DATA00

|     |           |
|-----|-----------|
| 01H | NTSC3. 58 |
| 02H | NTSC4. 43 |
| 03H | PAL       |
| 04H | SECAM     |

### 33. FAILURE MODE Inform

#### Function

The display informs the external control equipment of the failure mode for requests of failure detection information by the external control equipment.

#### Transmission Data

0FH UA1 UA2 3FH 00H CKS

#### ACK

6FH UA1 UA2 3FH 02H DATA00 DATA01 CKS  
DATA00

|                     |                         |
|---------------------|-------------------------|
| Bit0 (PDPmodule)    | 0 : Fault<br>1 : Normal |
| Bit1 (POWER SUPPLY) |                         |
| Bit2 (TEMPERATURE)  |                         |
| Bit3 (FAN)          |                         |
| Bit4 A12V           |                         |
| Bit5 D5V            |                         |
| Bit6 notused        |                         |
| Bit7 A5V            | 0 : Fault<br>1 : Normal |
| DATA01 Bit0 D3.3V   |                         |
| Bit1~7 : 0 Fixed    |                         |

### 34. SET CONDITION Inform

#### Function

The display informs the external control equipment of the set's condition information for requests of the set's condition information by the external control equipment.

#### Transmission Data

0FH UA1 UA2 40H 00H CKS

#### ACK

6FH UA1 UA2 40H 17H DATA00~DATA22 CKS

\*Accumulated set usage time display

|                   |                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| DATA12 Bit0 (LSB) | The set's accumulative time in 5 digits is displayed with 4 bits per digit and the first digit is displayed from Bit 0 of DATA12. |
| Bit7              |                                                                                                                                   |
| DATA13 Bit0       |                                                                                                                                   |
| Bit7              |                                                                                                                                   |
| DATA14 Bit0       | Bit3 (MSB)<br>Bit4~7 : 0 fixed                                                                                                    |
| Bit3 (MSB)        |                                                                                                                                   |
| Bit4~7 : 0 fixed  |                                                                                                                                   |

\*Microprocessor version display

Display example VER 1. 0

|                   |                                                            |
|-------------------|------------------------------------------------------------|
| DATA15 Bit0 (LSB) | Microprocessor version decimal point and first right digit |
| Bit3 (MSB)        |                                                            |
| Bit4 (LSB)        | Microprocessor version first digit                         |
| Bit7 (MSB)        |                                                            |

\*Current time display

1 character is expressed in 4 bits.

|             |                    |
|-------------|--------------------|
| DATA16 Bit0 | Seconds 1's digit  |
| Bit3        |                    |
| Bit4        | Seconds 10's digit |
| Bit7        |                    |

|             |                                                                   |
|-------------|-------------------------------------------------------------------|
| DATA17 Bit0 | Minutes 1's digit                                                 |
| Bit3        |                                                                   |
| Bit4        | Minutes 10's digit                                                |
| Bit7        |                                                                   |
| DATA18 Bit0 | Hours 1's digit                                                   |
| Bit3        |                                                                   |
| Bit4        | Hours 10's digit                                                  |
| Bit7        |                                                                   |
| DATA19 Bit0 | Day 1's digit                                                     |
| Bit3        |                                                                   |
| Bit4        | Day 10's digit                                                    |
| Bit7        |                                                                   |
| DATA20 Bit0 | Month 1's digit                                                   |
| Bit3        |                                                                   |
| Bit4        | Month 10's digit                                                  |
| Bit7        |                                                                   |
| DATA21 Bit0 | Year 1's digit                                                    |
| Bit3        |                                                                   |
| Bit4        | Year 10's digit                                                   |
| Bit7        |                                                                   |
| DATA22 Bit0 | 0 : Power management OFF<br>1 : Power management ON               |
| Bit1        | 0 : Wireless remote control OFF<br>1 : Wireless remote control ON |
| Bit2        | 0 : Timer OFF<br>1 : Timer ON                                     |
| Bit3~7      | : "0" fixed                                                       |

### 35. SIGNAL Inform

#### Function

The display informs the external control equipment of the input signal information for requests of input signal information by the external control equipment.

#### Transmission Data

0FH UA1 UA2 3EH 00H CKS

#### ACK

6FH UA1 UA2 3EH 04H DATA00~DATA03 CKS

|        |                                                                                                                                                                                                                                                                          |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DATA00 | Bit7~4 : Displays the 10's digit of the horizontal frequency. (0 to 9)<br>Bit3~0 : Displays the 10's digit of the horizontal frequency. (0 to 9)                                                                                                                         |
| DATA01 | Bit7~4 : Displays the decimal point and the first right digit of the horizontal frequency. (0 to 9)<br>Bit3 : Horizontal sync polarity display 1 : Negative<br>1 : Positive<br>Bit2 : Vertical sync polarity display 0 : Negative<br>1 : Positive<br>Bit1, 0 : "0" fixed |
| DATA02 | Bit7~4 : Displays the 10's digit of the vertical frequency. (0 to 9)<br>Bit3~0 : Displays the 1's digit of the vertical frequency. (0 to 9)                                                                                                                              |
| DATA03 | Bit7~4 : Displays the decimal point and the first right digit of the vertical frequency. (0 to 9)<br>Bit3~0 : "0" fixed                                                                                                                                                  |

"00H" is output when there is no signal.

## 36. SETTING MODE SELECT

### Function

The external control equipment changes the settings of the various items of the display.

### Transmission Data

CFH UA1UA2 04H 02H DATA00 DATA01 CKS  
DATA00

|      |       |                 |       |
|------|-------|-----------------|-------|
| Bit0 | 0     | not used        |       |
|      | 1     | not used        |       |
| Bit2 | bit 1 |                 |       |
| 0    | 0     | : POWER ON MODE | VIDEO |
| 0    | 1     | : POWER ON MODE | RGB1  |
| 1    | 0     | : POWER ON MODE | RGB2  |
| 1    | 1     | : POWER ON MODE | RGB3  |

|      |   |                 |     |
|------|---|-----------------|-----|
| Bit3 | 0 | : POWER MANAGER | OFF |
|      | 1 | : POWER MANAGER | ON  |

|      |   |                  |       |
|------|---|------------------|-------|
| Bit4 | 0 | : LONG LIFE MODE | 1 OFF |
|      | 1 | : LONG LIFE MODE | 1 ON  |

|      |   |                  |       |
|------|---|------------------|-------|
| Bit5 | 0 | : LONG LIFE MODE | 2 OFF |
|      | 1 | : LONG LIFE MODE | 2 ON  |

|      |      |                |
|------|------|----------------|
| Bit7 | Bit6 |                |
| 0    | 0    | : GRAY LEVEL 1 |
| 0    | 1    | : GRAY LEVEL 2 |
| 1    | 0    | : GRAY LEVEL 3 |

DATA00

|      |       |                   |
|------|-------|-------------------|
| Bit0 | bit 1 |                   |
| 0    | 0     | : RGB MODE STILL  |
| 1    | 0     | : RGB MODE MOTION |
| 0    | 1     | : RGB MODE DTV    |

### ACK

7FH UA1 UA2 04H 01H DATA00 CKS

## 37. SCREEN MODE Select

### Function

The external control equipment switches the screen mode of the display.

### Transmission Data

CFH UA1 UA2 51H 01H DATA00 CKS  
DATA00

|      |         |
|------|---------|
| 02H: | STADIUM |
| 03H: | ZOOM    |
| 04H: | NORMAL  |
| 05H: | FULL    |

### ACK

6FH UA1 UA2 51H 01H DATA00 CKS  
DATA00

|      |         |
|------|---------|
| 02H: | STADIUM |
| 03H: | ZOOM    |
| 04H: | NORMAL  |
| 05H: | FULL    |

## 38. PICTURE Mute On

### Function

The external control equipment switches on PICTURE Mute of the display.

### Transmission Data

8FH UA1 UA2 3CH 00H CKS

### ACK

2FH UA1 UA2 3CH 00H CKS

## 39. PICTURE Mute Off

### Function

The external control equipment switches off PICTURE Mute of the display.

### Transmission Data

8FH UA1 UA2 3DH 00H CKS

### ACK

2FH UA1 UA2 3DH 00H CKS

## 40. MULTI MODE Select

### Function

The external control equipment changes the MULTI MODE of the display.

### Transmission Data

CFH UA1 UA2 03H 02H DATA00 DATA01 CKS

DATA00 (SCREEN DIVIDER SETTING)

|     |                                   |
|-----|-----------------------------------|
| 01H | : Single mode                     |
| 02H | : Multiple screens mode 2 screens |
| 03H | : Multiple screens mode 4 screens |

DATA01 (POSITION OF DIVIDE)

|     |                                            |
|-----|--------------------------------------------|
| 01H | : Screen upper left selection (4 screens)  |
| 02H | : Screen upper right selection (4 screens) |
| 03H | : Screen lower right selection (4 screens) |
| 04H | : Screen lower left selection (4 screens)  |
| 05H | : Upper screen selection (2 screens)       |
| 06H | : Lower screen selection (2 screens)       |

When the single mode has been selected with DATA 00, set this bit between 01 and 06H.

### ACK

7FH UA1 UA2 03H 02H DATA00 DATA01 CKS  
DATA00 (SCREEN DIVIDER SETTING)

|     |                                   |
|-----|-----------------------------------|
| 01H | : Single mode                     |
| 02H | : Multiple screens mode 2 screens |
| 03H | : Multiple screens mode 4 screens |

DATA01 (POSITION OF DIVIDE)

|     |                                            |
|-----|--------------------------------------------|
| 01H | : Screen upper left selection (4 screens)  |
| 02H | : Screen upper right selection (4 screens) |
| 03H | : Screen lower right selection (4 screens) |
| 04H | : Screen lower left selection (4 screens)  |
| 05H | : Upper screen selection (2 screens)       |
| 06H | : Lower screen selection (2 screens)       |

## 41. MULTI MODE Request

### Function

The MULTI MODE status of the display is requested for MULTI MODE information requests of the external control equipment.

### Transmission Data

0FH UA1 UA2 3BH 00H CKS

### ACK

6FH UA1 UA2 3BH 02H DATA00 DATA01 CKS  
DATA00 (SCREEN DIVIDER SETTING)

|     |                                   |
|-----|-----------------------------------|
| 01H | : Single mode                     |
| 02H | : Multiple screens mode 2 screens |
| 03H | : Multiple screens mode 4 screens |

DATA01 (POSITION OF DIVIDE)

|     |                                            |
|-----|--------------------------------------------|
| 01H | : Screen upper left selection (4 screens)  |
| 02H | : Screen upper right selection (4 screens) |
| 03H | : Screen lower right selection (4 screens) |
| 04H | : Screen lower left selection (4 screens)  |
| 05H | : Upper screen selection (2 screens)       |
| 06H | : Lower screen selection (2 screens)       |

## 42. OSM SELECT

### Function

The external equipment switches the on-screen display (OSM) of the display unit ON and OFF.

### Transmission Data

DFH 80H 60H 58H 01H DATA00 CKS  
DATA00

01H : OSM ON (During normal operation)  
02H : OSM OFF

### ACK


7FH 60H 80H 58H 01H DATA00 CKS  
DATA00

01H : OSM ON  
02H : OSM OFF

\* Use this command with the setting of bits 0 and 1 fixed as follows: bit 0 = 1,  
and bit 1 = 1.

\* ACK should be ignored in the case of a cascade connection.

Cabinet dimensions

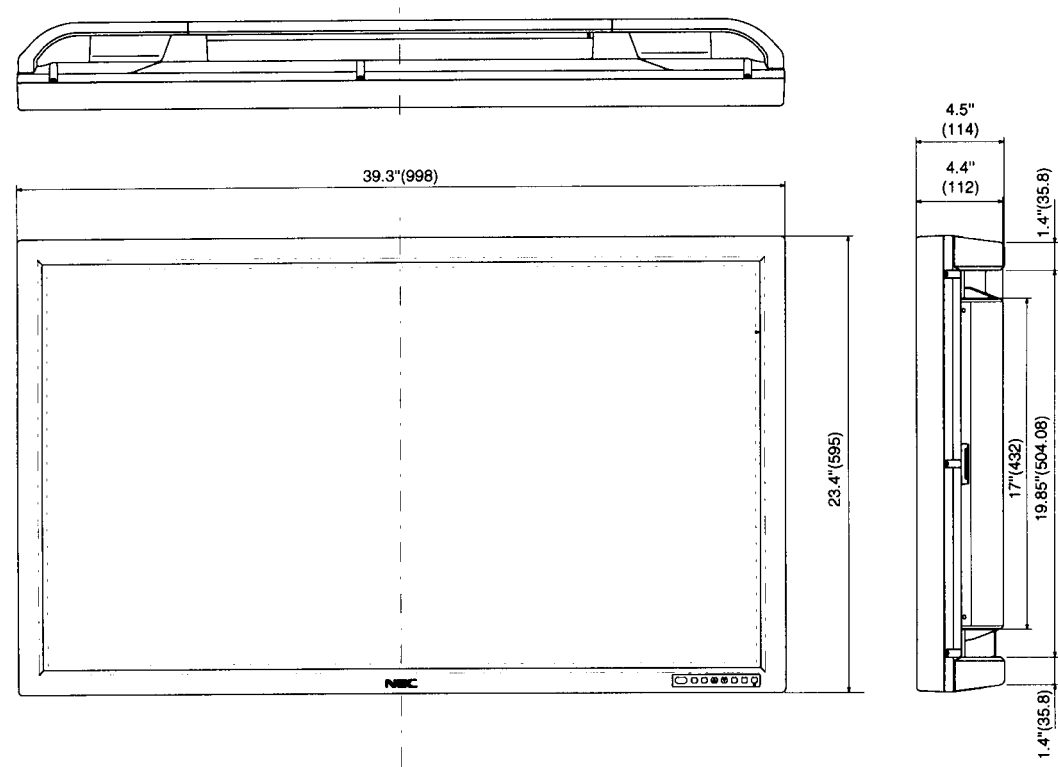

Unit : inch(mm)

---



# Plasma Display Mounting Unit

## Installation Manual

■ MULTI SCREEN SUPPORT UNIT PX-42VP1U-MW-S


We greatly appreciate your purchase of this NEC plasma display mount unit.  
Read these instructions carefully to ensure proper use.  
★ This plasma display mount unit is exclusively for use with NEC plasma displays.

Special technology is required in the mounting of the plasma display.  
Such work should never be undertaken by the customer.

### To the Dealer and the Installer

For the safety of the customer, we ask that the installation work be started after careful attention is paid to the strength of the mounting location to be sure it will withstand the weight of the plasma display and mounting hardware.  
Be sure that two or more persons engage in the installation work.  
Be careful not to lose any of the removed screws or other parts.

### ■ Package Parts List

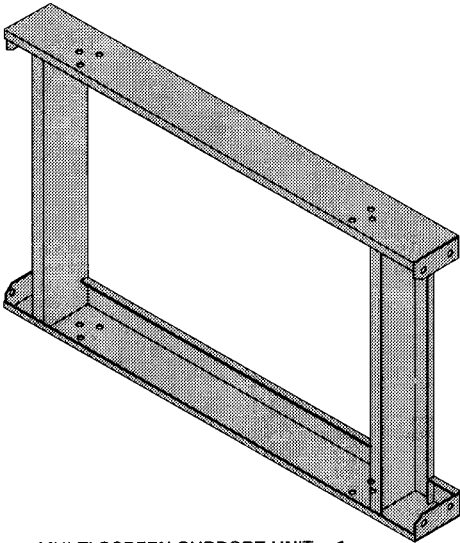

MULTI SCREEN SUPPORT UNIT.....1

|                                                |   |
|------------------------------------------------|---|
| M8x20 hexagonal bolts .....                    | 4 |
| M8 hexagonal nuts .....                        | 4 |
| Spring washer.....                             | 4 |
| Installation Manual (these instructions) ..... | 1 |

### Specifications

|                       |                            |
|-----------------------|----------------------------|
| Model :               | PX-42MVP1U-MW-S            |
| External dimensions : | 998(W)X110(D)X595(H)mm     |
|                       | 39.3(W)X4.3(D)X23.4(H)inch |
| Weight :              | 8.0kg                      |
|                       | 17.6lbs                    |

NEC Corporation

Printed in Japan  
78411371

## Heed the Following

### Before Use...

#### Symbols

Various symbols are used in this Installation Manual for the safe and proper use of the product as well as preventing any injury or damage to persons or property. These symbols and their meanings are described below. Please have a good understanding of these matters before reading the main text of the manual.

|                                                                                   |                                                                                                                                                 |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>WARNING</b> Ignoring this indication and improper handling could be the cause of personal injury such as a serious injury or death.          |
|  | <b>CAUTION</b> Ignoring this indication and improper handling could cause injury to a person or damage to the surrounding household belongings. |

#### Examples of Symbols

-  This symbol informs that there are contents that **demand caution (including warnings)**. Concrete details of the caution are written within the diagram.
-  This symbol indicates a **prohibited** matter. Concrete details of the prohibition are written within the diagram.
-  This symbol indicates something that **must be done**. Concrete details of the prohibition are written within the diagram.

#### **WARNING**

- 
  - \* When installing the plasma display or making angle adjustments, be sure to make a request for service with the dealer and ensure the work is performed according to this manual. Incorrect installation and angle adjustments may result in the plasma display falling and causing injury.
- 
  - \* To prevent the plasma display from toppling or falling, the strength of the installation place and the method of fastening must support the combined weight of the Multi Screen Support Unit, Multi Screen Mount Unit and plasma display for an extended period of time as well as withstand earthquakes. Improper installation may result in the Multi Screen Mount Unit or plasma display falling and causing injury. Be sure to observe the following matters.
    - An electrical outlet should be used for the power supply of the plasma display. Direct connection to a power cable is dangerous and should not be used. Please use a power outlet that can be reached to allow the insertion and withdrawal of the power plug.
    - Installing on wooden ceilings or walls
 

The load should by all means be carried by beams, and when the strength of the beams is insufficient, they should be strengthened.
    - Installation for Walls Made of Concrete
 

Use commercial anchor bolts and other parts that are strong enough to easily support the load of the plasma display.

### Heed the Following

#### **WARNING**



- \* To ensure safety, bolts and screws must be tightened securely. Be sure to use the supplied parts for the brackets and other fittings.  
Failure to do so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* When aligning the grooves of the display fittings to the fixed unit, check to make sure that they are securely engaged.  
Failure to do so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* Do not modify any parts.  
Modification of parts may result in the Multi Screen Mount Unit or the plasma display toppling or falling and causing injury.



- \* Do not use any damaged parts. Use of damaged parts may result in the Multi Screen Mount Unit or the plasma display toppling or falling and causing injury.  
In the event that any parts are damaged, please contact the dealer.



- \* This plasma display mounting unit is for use only with NEC plasma displays.  
Do not use with any other equipment since the equipment could fall and cause injury.

#### **CAUTION**



- \* Do not install in unstable places such as on a shaky platform or slanted surface. Doing so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* Do not obstruct the ventilation holes of the plasma display. Doing so will prevent the dissipation of heat and may result in a fire. Do not use the plasma display in the following ways:  
Do not install the plasma display in a tight place where ventilation is poor, or place a cover on it, etc.



- \* Do not install the plasma display in front of the vents of an air conditioner or heater, or in a place where there is strong vibration.  
Doing so may result in fire or electrical shock.



- \* Do not install the plasma display in humid or dusty places, or where it will be exposed to greasy smoke or steam (such as near cooking equipment or humidifiers).  
Doing so may result in a fire. Do not use outdoors. Doing so may result in fire or electrical shock.



- \* When installing the plasma display, leave sufficient space between it and surrounding objects as indicated in the diagram.  
Failure to leave sufficient space will prevent the dissipation of heat and may result in a fire.



- \* Support the plasma display when attaching it to the pole unit. Failing to do so may result in the equipment falling and causing injury.



- \* Do not bundle the power cable.  
Doing so may result in fire or electrical shock.

#### **Installation Location**

**Avoid rooms with a lot of dust, humidity, greasy smoke, or tobacco smoke.**

Dirt will adhere to the plasma display screen and cause a deterioration in image quality.

**Avoid places in which the screen is exposed to direct sunlight or illumination light.**

When ambient light hits the screen directly, the image appears washed out and is difficult to view.


**Avoid places which reach high temperatures or low temperatures.**

Such extreme temperatures will cause breakdown.


## Installation Work

Mount the fittings in a way suited to the material and structure of the ceiling, floor or wall.  
Reinforce the surface of installation as necessary.

\* For details, refer to the multi screen mount unit's instructions.

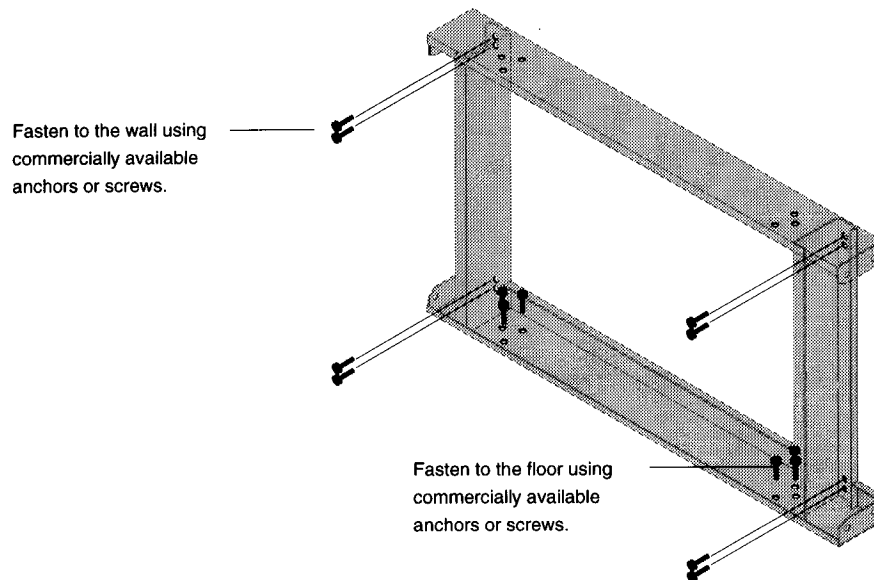

- When using anchor bolts, etc., on the floor or wall, refer to the measurements shown on the diagram.
- When fastening to the floor or wall, refer to the table of applicable screws shown below.
- When fastening to the wall, be sure to fasten to a beam. Reinforce the beam if its strength is insufficient.
- When installing, be sure to heed the instructions under "Always Heed the Following" on pages 2 and 3.

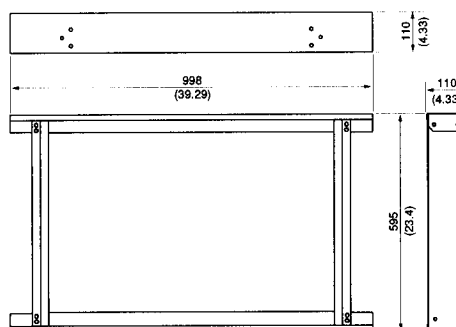

Unit : mm  
(Unit:inch)

NEC

## Plasma Display Stand

### Installation Manual

#### ■ Slant Stand PX-42MVP1U-PS

We greatly appreciate your purchase of this NEC Plasma Display Stand.

Read these instructions carefully to ensure proper usage.

\* This plasma display mounting unit is for use only with NEC plasma displays.

**Special skills are required to install the Plasma Display.  
Do not attempt to install the Plasma Display on your own.**



#### **Attention: Sales Agents and Technicians**

To ensure the user's safety, be sure to select a place sufficiently strong to bear the weight of the Plasma Display and the different units.

Installation should be performed by a minimum of two persons.

Be careful not to lose removed screws, etc.

#### List of included parts



NEC Corporation

Printed in Japan  
78411221

## Always Heed the Following

### Before Use...

#### Symbols

Various symbols are used in this Installation Manual for the safe and proper use of the product as well as preventing any injury or damage to persons or property. These symbols and their meanings are described below. Please have a good understanding of these matters before reading the main text of the manual.

|                                                                                   |                |                                                                                                                                  |
|-----------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------|
|  | <b>WARNING</b> | Ignoring this indication and improper handling could be the cause of personal injury such as a serious injury or death.          |
|  | <b>CAUTION</b> | Ignoring this indication and improper handling could cause injury to a person or damage to the surrounding household belongings. |

#### Examples of Symbols

-  This symbol informs that there are contents that **demand caution (including warnings)**. Concrete details of the caution are written within the diagram.
-  This symbol indicates a **prohibited** matter. Concrete details of the prohibition are written within the diagram.
-  This symbol indicates something that **must be done**. Concrete details of the prohibition are written within the diagram.

#### **WARNING**

-  - Be sure to have the Plasma Display installed by your store of purchase following the instructions in this manual. If installed incorrectly, the Plasma Display could tip over, resulting in injury.
-  - To ensure safety, tighten bolts and screws securely. Failure to do so could cause the Plasma Display to tip over, resulting in injury.
-  - Do not modify parts. Doing so could cause the Plasma Display to tip over, resulting in injury.
-  - Do not use damaged parts. Doing so could cause the Plasma Display to tip over, resulting in injury. If a part should be damaged, contact the store of purchase.
-  - This plasma display mounting unit is for use only with NEC plasma displays. Do not use with any other equipment since the equipment could fall and cause injury.
-  - Do not set on shaky stands, tilted surfaces or other unstable places. Doing so could cause the Plasma Display to tip over or fall, resulting in injury.

### Always Heed the Following

#### CAUTIONS



- Do not obstruct the Plasma Display's ventilation holes.  
If the ventilation holes are covered, the heat will build up inside, and this could lead to fire.  
For example, do not install the Plasma Display in narrow spaces where ventilation is poor, do not place covers over it, etc.




- Do not install the Plasma Display near air conditioner air outlets or in places where vibrations are strong.  
Doing so could lead to fire or electric shock.



- Do not install the Plasma Display in humid or dusty places or places exposed to soot or vapor (such as in kitchens, near humidifiers, etc.). Doing so could lead to fire.  
Do not install the Plasma Display outdoors. Doing so could lead to fire or electric shock.



- When installing the Plasma Display, leave sufficient space around it, as shown in the diagram. Failure to do so could cause heat to build up inside, leading to fire.



- Hold the Plasma Display securely when mounting the units on it. Failure to do so could cause the Plasma Display to fall, resulting in injury.



- The Plasma Display is heavy, so be sure to install in a stable place and take measures to prevent it from tipping over and causing injury.  
The Plasma Display has a high center of gravity. It should be unpacked and moved by a minimum of two people, holding it at the top and bottom. Failure to do so could cause the Plasma Display to fall, resulting in injury.

#### NOTES

##### **Avoid dusty or humid rooms and rooms filled with soot or cigarette smoke.**

The Plasma Display's screen could get dirty, resulting in poor picture quality.

##### **Avoid places where the screen is exposed to direct sunlight or strong artificial light.**

If surrounding light should shine on the screen, the screen will appear white and be hard to see.

##### **Do not install in places where the temperature is high or low.**

Doing so could result in damage.


##### **Additional fall prevention measures**

- Use the hook of the rear cover to securely mount the plasma display to a wall or post.  
(Do not do this when using the separately sold powered lifting stand, ceiling mount unit or wall mount unit.)
- Pay attention to the rope when moving the Plasma Display.

## Installing the Plasma Display on the Stand

### 1. Unfasten the wrapping of the plasma display

1. Open the cardboard in which the plasma display is wrapped at the top, then remove the 3 pieces of styrofoam.
2. Remove the cardboard from the top and open the protective sheet.

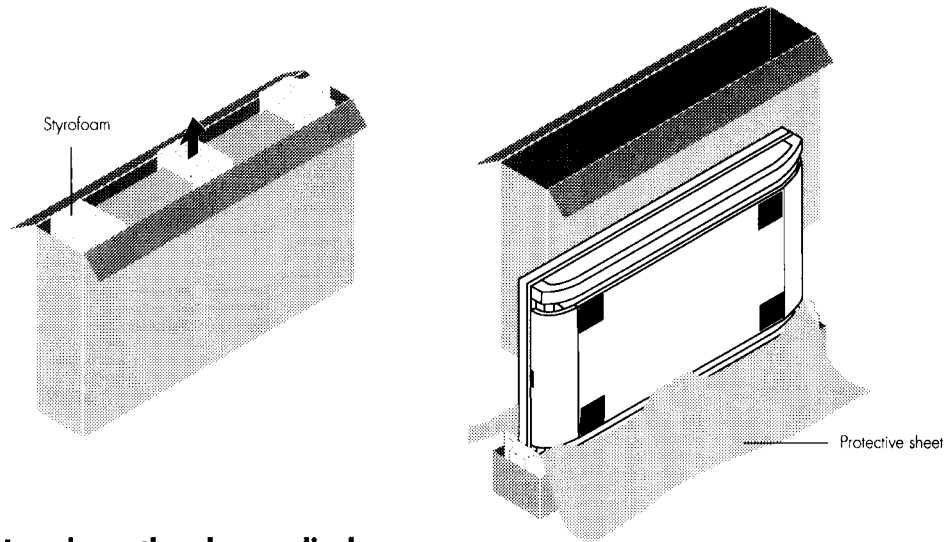


### 2. Lay down the plasma display

Spread out the protective sheet that was used in the packaging underneath the screen surface, then lay down the plasma display on top of it.

Be sure to use a larger desk or workbench than the plasma display when you are working.

Do not apply strong pressure against the front glass. Doing so could result in damage to the plasma display.

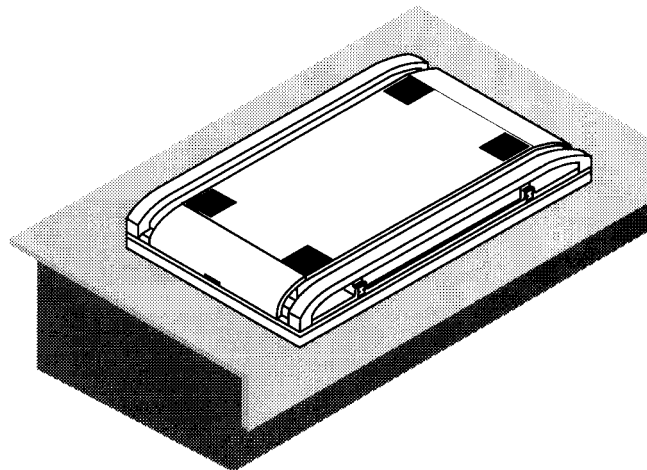



### 3. Choose the type of installation for the plasma display

With these stands you can choose three types of installation: horizontal, on the floor or vertical.


## Installing the Plasma Display on the Stand

### 4. Mount the stands onto the plasma display



#### • Horizontal installation

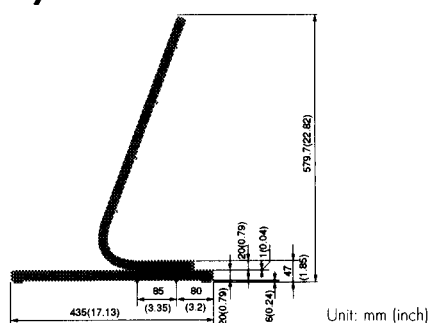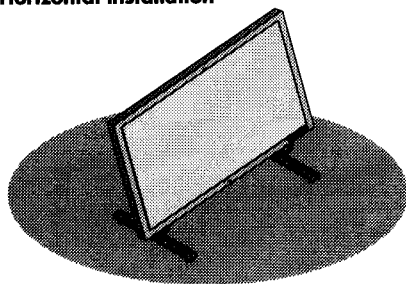

Place the screws through the collars and fasten the stands to the plasma display at the four positions shown on the diagram below.


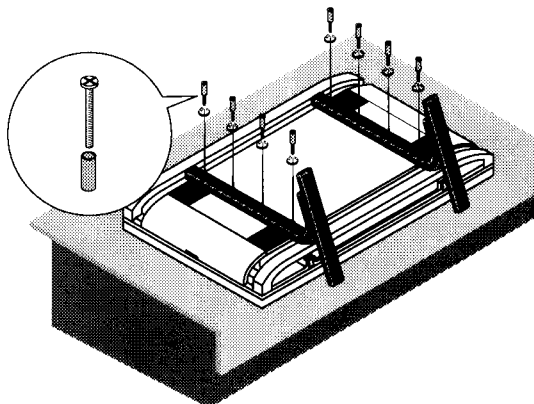


#### • Floor installation

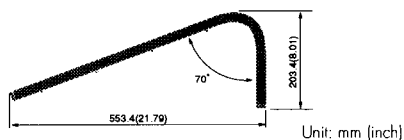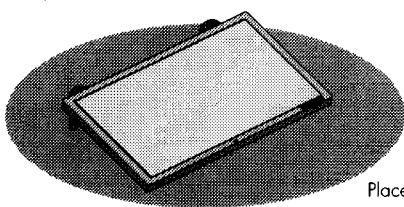



Place the screws through the collars and fasten the J-shaped poles to the plasma display at the four positions shown on the diagram below.

Remove the two screws shown on the diagram from the stands and remove the base piece so that only the J-shaped poles remain.

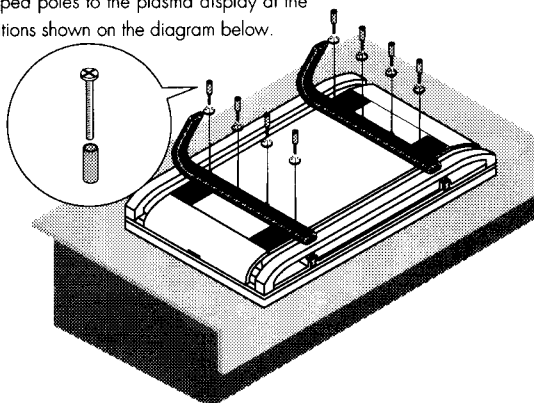


## Installing the Plasma Display on the Stand


### • Vertical installation

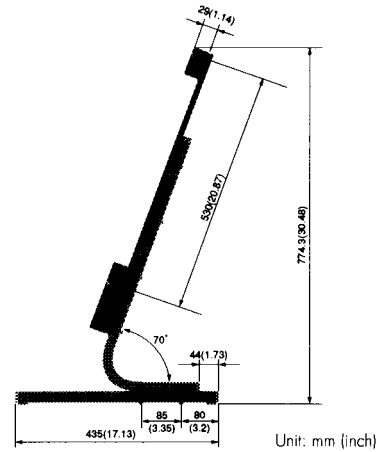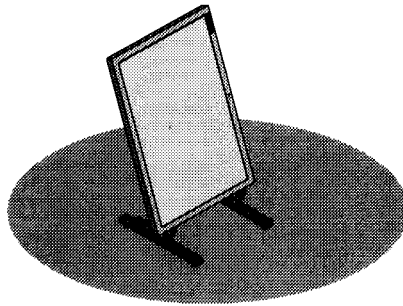

Fasten the mount fittings using the included bolts.

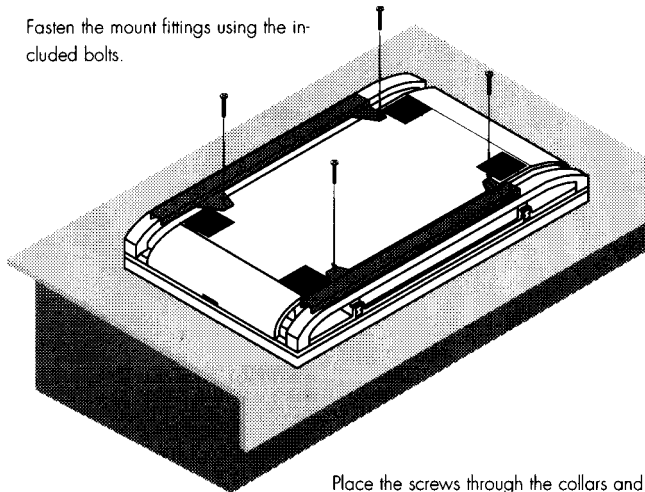

Place the screws through the collars and fasten the stands to the plasma display at the four positions shown on the diagram below.

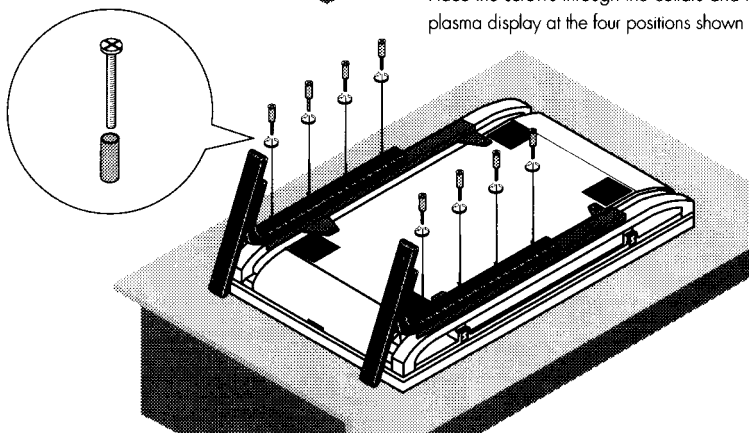

# NEC

## Plasma Display Mounting Unit

### Installation Manual

#### ■ MULTI SCREEN MOUNT UNIT PX-42MVP1U-MW

We greatly appreciate your purchase of this NEC plasma display mount unit.

Read these instructions carefully to ensure proper use.

★ This plasma display mount unit is exclusively for use with NEC plasma displays.

Special technology is required in the mounting of the plasma display.


Such work should never be undertaken by the customer.

#### To the Dealer and the Installer

For the safety of the customer, we ask that the installation work be started after careful attention is paid to the strength of the mounting location to be sure it will withstand the weight of the plasma display and mounting hardware.

Be sure that two or more persons engage in the installation work.

Be careful not to lose any of the removed screws or other parts.

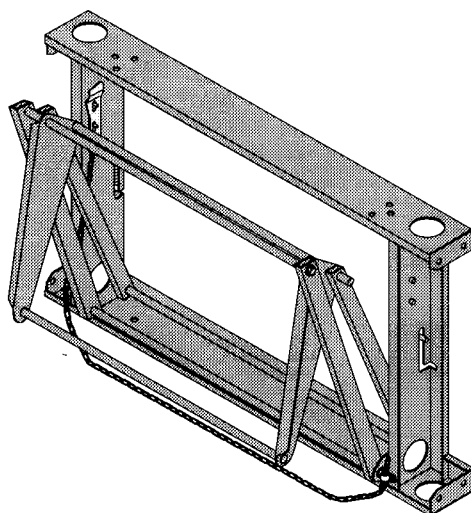

#### CONTENTS

|                                                         |    |
|---------------------------------------------------------|----|
| Heed the Following....                                  | 2  |
| List of Packaged Parts and Names of the Parts....       | 4  |
| Installation Work....                                   | 5  |
| Attaching the Display Fitting to the Plasma Display.... | 6  |
| Setup....                                               | 7  |
| Mounting the Plasma Display....                         | 11 |

#### Specifications

|                       |                            |
|-----------------------|----------------------------|
| Model :               | PX-42MVP1U-MW              |
| External dimensions : | 998(W)X145(D)X595(H)mm     |
|                       | 39.3(W)X5.7(D)X23.4(H)inch |
| Weight :              | 20.5kg                     |
|                       | 45.23lbs                   |

## NEC Corporation

Printed in Japan  
78411301

## Heed the Following

### Before Use...

#### Symbols

Various symbols are used in this Installation Manual for the safe and proper use of the product as well as preventing any injury or damage to persons or property. These symbols and their meanings are described below. Please have a good understanding of these matters before reading the main text of the manual.

 **WARNING** Ignoring this indication and improper handling could be the cause of personal injury such as a serious injury or death.

 **CAUTION** Ignoring this indication and improper handling could cause injury to a person or damage to the surrounding household belongings.

#### Examples of Symbols



⚠ This symbol informs that there are contents that **demand caution (including warnings)**. Concrete details of the caution are written within the diagram.



⊘ This symbol indicates a **prohibited** matter. Concrete details of the prohibition are written within the diagram.



ⓘ This symbol indicates something that **must be done**. Concrete details of the prohibition are written within the diagram.

#### **WARNING**



\* When installing the plasma display or making angle adjustments, be sure to make a request for service with the dealer and ensure the work is performed according to this manual. Incorrect installation and angle adjustments may result in the plasma display falling and causing injury.



\* To prevent the plasma display from toppling or falling, the strength of the installation place and the method of fastening must support the combined weight of the plasma display and the Multi Screen Mount Unit for an extended period of time as well as withstand earthquakes. Improper installation may result in the Multi Screen Mount Unit or plasma display falling and causing injury.

Be sure to observe the following matters.

- An electrical outlet should be used for the power supply of the plasma display. Direct connection to a power cable is dangerous and should not be used. Please use a power outlet that can be reached to allow the insertion and withdrawal of the power plug.
- Installing on wooden ceilings or walls  
The load should by all means be carried by beams, and when the strength of the beams is insufficient, they should be strengthened.
- Installation for Walls Made of Concrete  
Use commercial anchor bolts and other parts that are strong enough to easily support the load of the plasma display.

### Heed the Following

#### WARNING



- \* To ensure safety, bolts and screws must be tightened securely. Be sure to use the supplied parts for the brackets and other fittings.  
Failure to do so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* When aligning the grooves of the display fittings to the fixed unit, check to make sure that they are securely engaged.  
Failure to do so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* Do not modify any parts.  
Modification of parts may result in the Multi Screen Mount Unit or the plasma display toppling or falling and causing injury.



- \* Do not use any damaged parts. Use of damaged parts may result in the Multi Screen Mount Unit or the plasma display toppling or falling and causing injury.  
In the event that any parts are damaged, please contact the dealer.



- \* This plasma display mounting unit is for use only with NEC plasma displays.  
Do not use with any other equipment since the equipment could fall and cause injury.

#### CAUTION



- \* Do not install in unstable places such as on a shaky platform or slanted surface. Doing so may result in the Multi Screen Mount Unit or plasma display toppling or falling and causing injury.



- \* Do not obstruct the ventilation holes of the plasma display. Doing so will prevent the dissipation of heat and may result in a fire. Do not use the plasma display in the following ways:  
Do not install the plasma display in a tight place where ventilation is poor, or place a cover on it, etc.



- \* Do not install the plasma display in front of the vents of an air conditioner or heater, or in a place where there is strong vibration.  
Doing so may result in fire or electrical shock.



- \* Do not install the plasma display in humid or dusty places, or where it will be exposed to greasy smoke or steam (such as near cooking equipment or humidifiers).  
Doing so may result in a fire. Do not use outdoors. Doing so may result in fire or electrical shock.



- \* When installing the plasma display, leave sufficient space between it and surrounding objects as indicated in the diagram.  
Failure to leave sufficient space will prevent the dissipation of heat and may result in a fire.



- \* Support the plasma display when attaching it to the pole unit. Failing to do so may result in the equipment falling and causing injury.



- \* Do not bundle the power cable.  
Doing so may result in fire or electrical shock.

#### Installation Location

**Avoid rooms with a lot of dust, humidity, greasy smoke, or tobacco smoke.**

Dirt will adhere to the plasma display screen and cause a deterioration in image quality.



**Avoid places in which the screen is exposed to direct sunlight or illumination light.**

When ambient light hits the screen directly, the image appears washed out and is difficult to view.


**Avoid places which reach high temperatures or low temperatures.**

Such extreme temperatures will cause breakdown.


## List of Packaged Parts and Names of the Parts

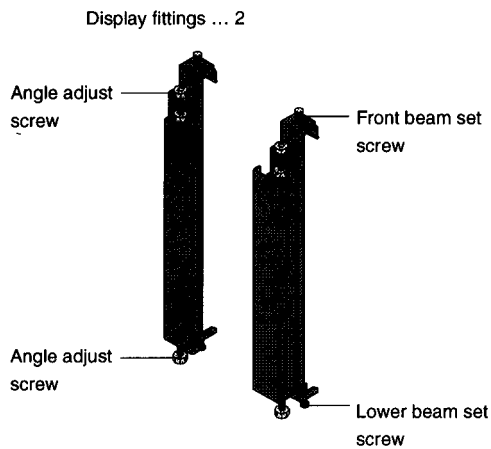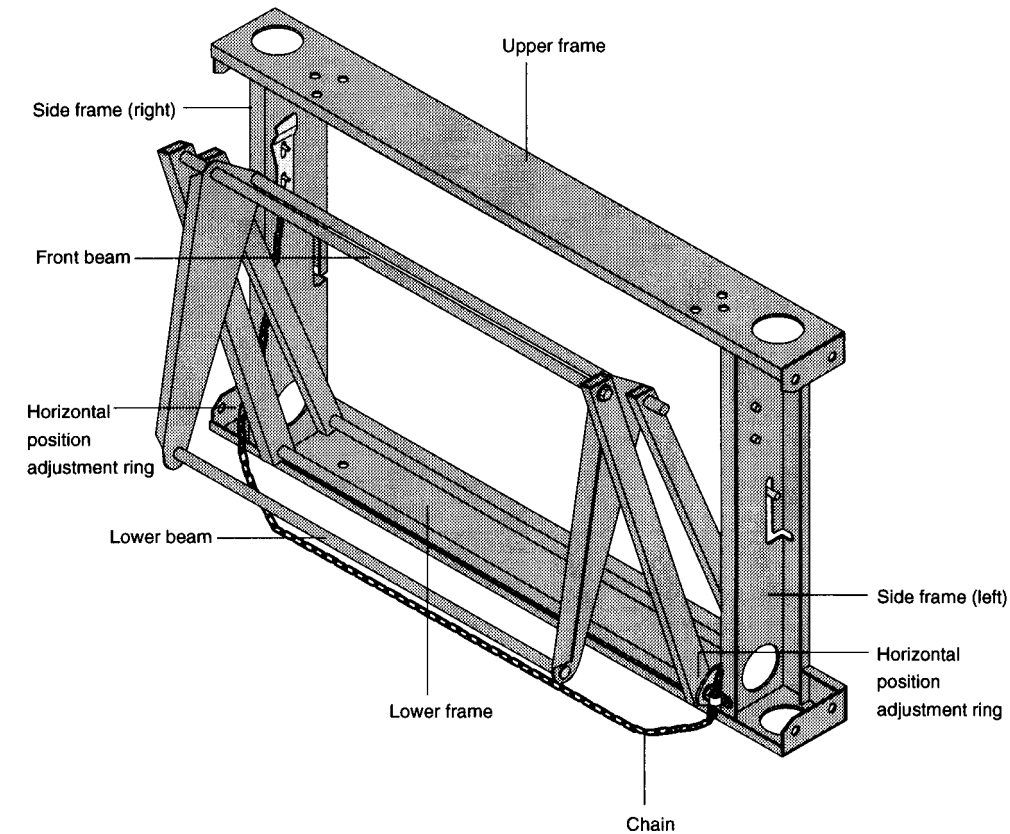

Bracket A ... 1



Bracket B ... 1




- Hexagonal bolts (M8x20) ... 7
- Hexagonal nuts (M8) ... 13
- Spring washers (M8) ... 7
- Screws (M4x15) ... 8
- Screws (M5x12) ... 8
- Installation instructions (these instructions) ... 1

## Installation Work

Mount the fittings in a way suited to the material and structure of the ceiling, floor or wall.

Reinforce the surface of installation as necessary.

- When using anchor bolts, etc., on the floor or wall, refer to the measurements shown on the diagram.
- When fastening to the floor or wall, refer to the table of applicable screws shown below.
- When fastening to the wall, be sure to fasten to a beam. Reinforce the beam if its strength is insufficient.
- When installing, be sure to heed the instructions under "Always Heed the Following" on pages 2 and 3.

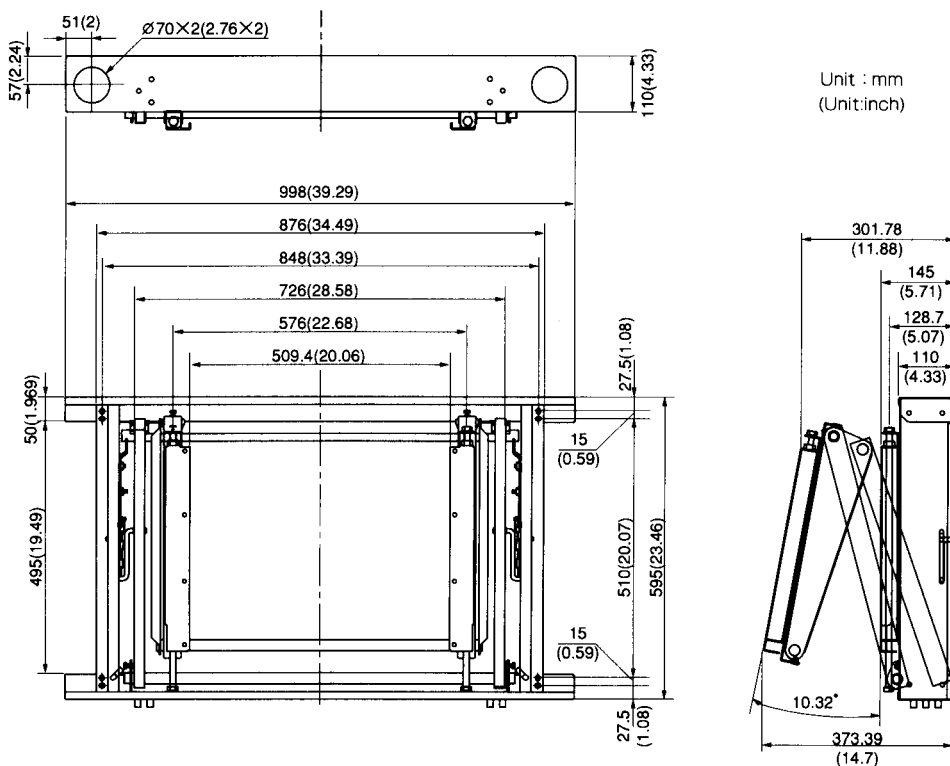

- Fasten the Multi Screen Mount Unit to the wall using a Multi Screen Support Unit stand, etc., in such a way that the weight is supported by the floor.
- When mounting directly to a wall, reinforce the wall sufficiently.

## Attaching the Display Fittings to the Plasma Display


To attach the plasma display to the Multi Screen Mount Unit, display fittings are required. Attach the display fittings to the plasma display using the following procedure.

### Preparation


The procedure for mounting the display fittings to the various models is described after the following steps are performed.

### Remove the Packaging

1. Open the upper carton which packages the plasma display and remove the styrofoam.




2. Remove the upper carton and open the protective sheet.

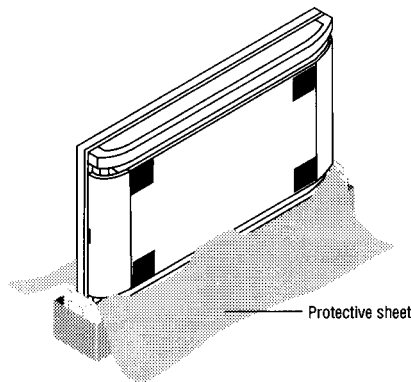

### 1. Pull out the simple stands

Remove the plasma display from its packaging carton and follow the points below to pull out the simple stands that are located at 2 positions at the bottom surface of the plasma display.

1. Grasp the end and pull out.
2. The stand will open automatically when your hand is removed.

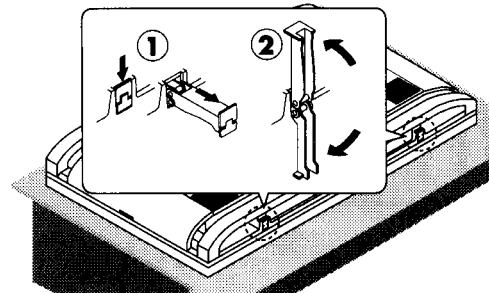

\* The display fittings can also be installed by removing the plasma display from its box and placing it with the screen facing down on top of a flat stand (larger than the display) on which you have laid the protective sheet used to package the display.


### ⚠ WARNING!

The simple stands are for use as temporary stands at the time of installation. Do not install with only the simple stands since this is dangerous.

### 2. Attach the Display Fittings

With the plasma display standing on its simple stands, use the included screws to fasten the display fittings (one at each side) to the screw holes in the plasma display.

\* When the plasma display has been attached to the Multi Screen Mount Unit and the installation work is finished, house the simple stands inside the plasma display. To house the simple stands, close them and then continue to push them inside the main unit.

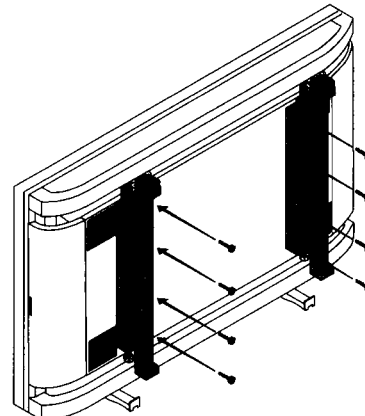


## Set up

### Fastening the Multi Screen Mount Unit to a wall

Install in the order indicated by the numbers on the diagram at the right.

Referring to "Installation Works" on page 5, reinforce the floor and wall so that they can support the weight of the plasma displays and Multi Screen Mount Units.



Multi Screen Support Unit are sold separately.  
When using Multi-Unit stands, install them first using the same procedure as the one described below.

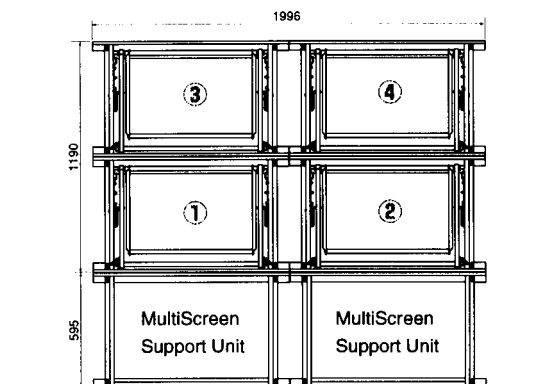

Use commercially available anchors or screws to fasten Multi Screen Mount Unit (1).

Be sure to fasten the anchors or screws to beams. (Use types of anchors or screws that are suited for the type of wall.)

The position in which Multi Screen Mount Unit (1) is installed will determine the position of other Multi Screen Mount Units, so be sure to install it levelly, etc.

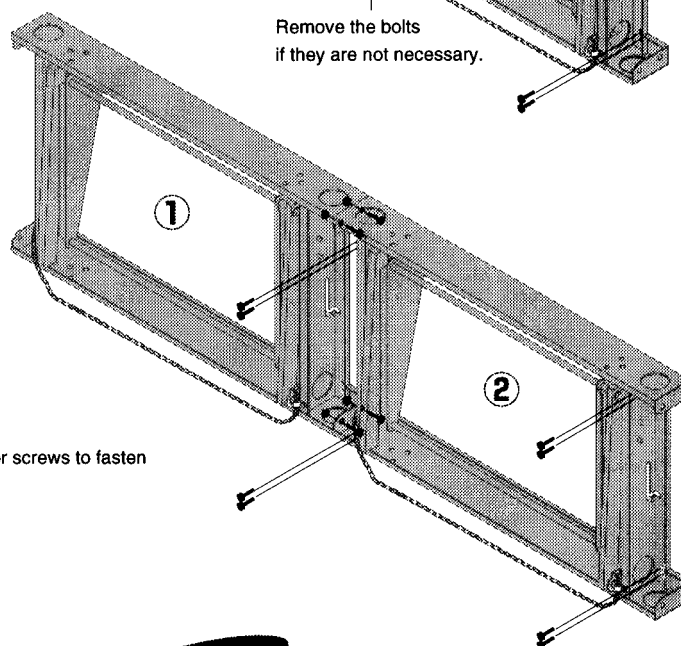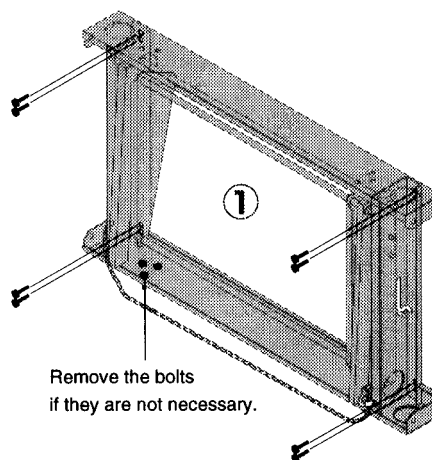



Use commercially available anchors or screws to fasten Multi Screen Mount Unit 2.

Setup

Set the Multi Screen Mount Unit (3) on top of Multi Screen Mount Unit (1) with the holes in the upper frame of Multi Screen Mount Unit (1) lined up with the bolts in the lower frame of Multi Screen Mount Unit (3), then tighten from below using the included nuts.


Set the Multi Screen Mount Unit (4) on top of Multi Screen Mount Unit (2) with the holes in the upper frame of Multi Screen Mount Unit (2) lined up with the bolts in the lower frame of Multi Screen Mount Unit (4), then tighten from below using the included nuts.

Use the included hexagonal bolts (M8) and nuts to fasten the side frames of Multi Screen Mount Units (3) and (4).

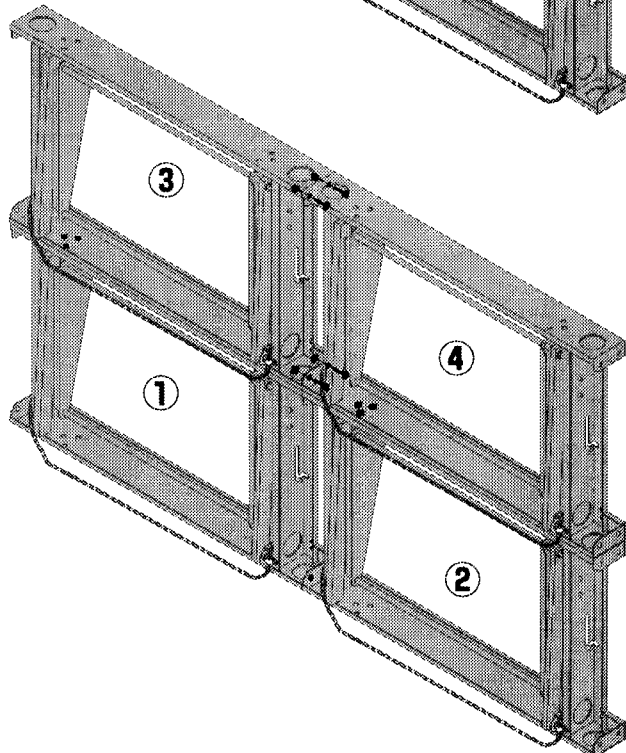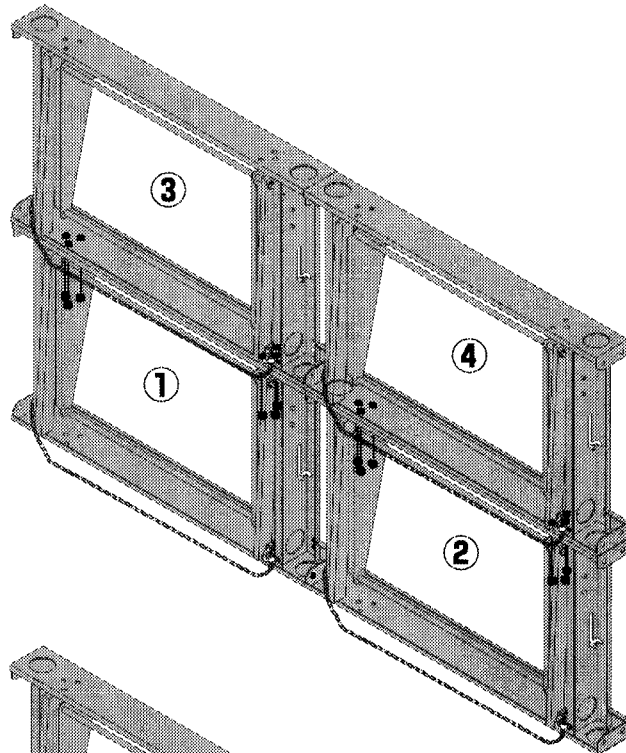


### Setup

Use commercially available anchors or screws to fasten Multi Screen Mount Unit (3) then Multi Screen Mount Unit (4).

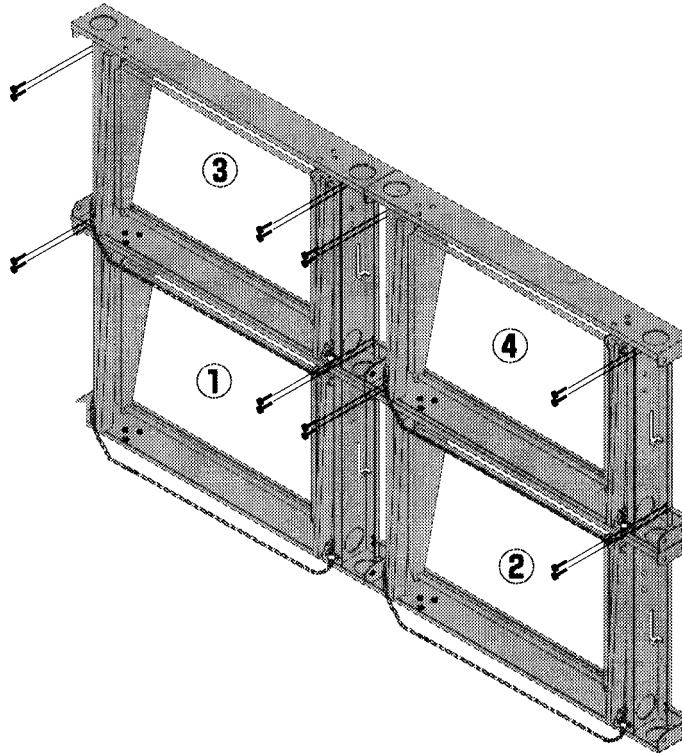

**Setup**

Brackets A and B are required when installing a 50-inch display.  
Install them in the positions shown on the diagram below.

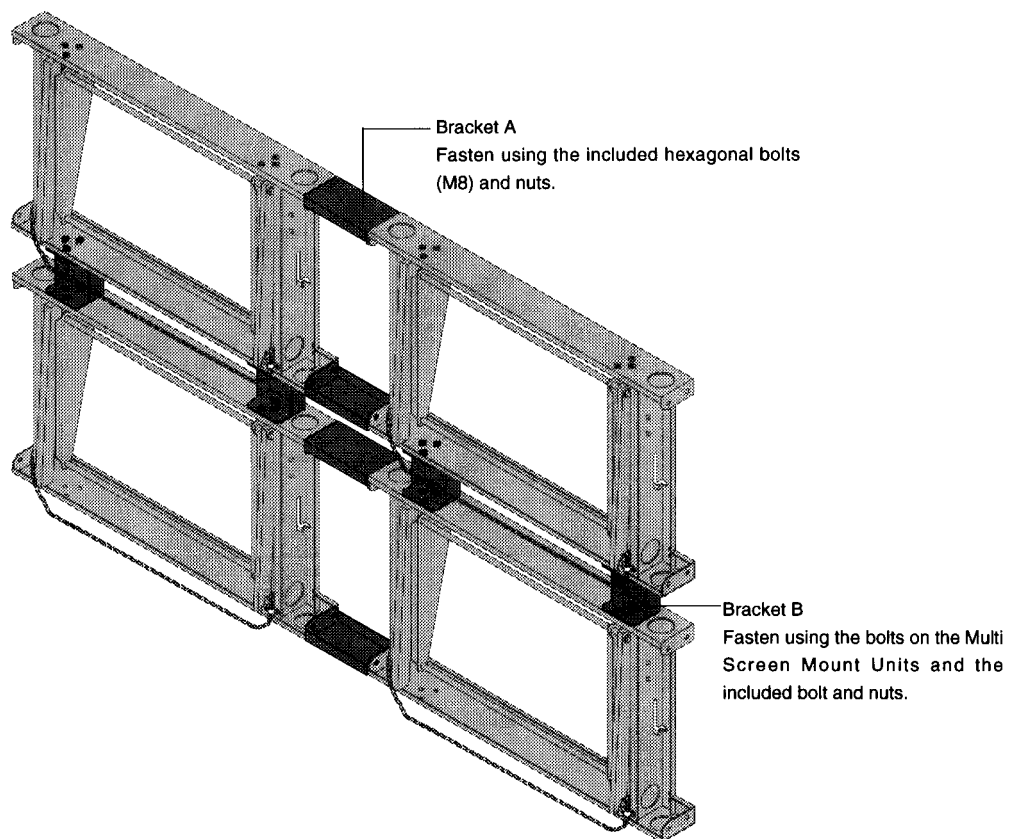


## Mounting the Plasma Display

### Preparations

The Multi Screen Mount Unit and display mount fittings are adjusted upon shipment so that there are no gaps as shown by the dotted lines.

Adjust the mount positions of the displays as shown in the diagram to make gaps between them.

If there are no gaps, the displays will touch each other and could be scratched.

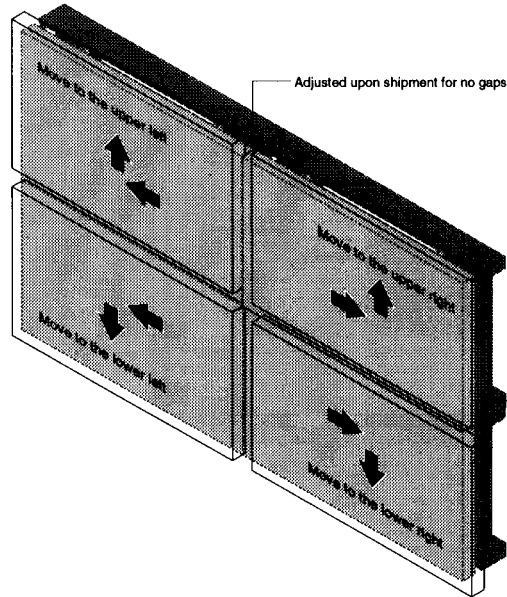

### Adjusting the positions of the displays

#### ■ Adjusting the angle and the vertical position

Turn the angle adjust screws located at the tops and bottoms of the display mount fittings to move the display up or down.

- When turned clockwise, the display moves up.
- When turned clockwise, the display moves down.


\* If the display is at an angle, change the horizontal adjustment to fix the angle.

#### ■ Adjusting the horizontal position

Turn the horizontal position adjust screws located at the sides of the Multi Screen Mount Units to move them left or right.

- When turned towards you the display moves to the left.
- When turned away from you the display moves to the right.


\* Always turn both of the horizontal position adjust screws when adjusting the position.

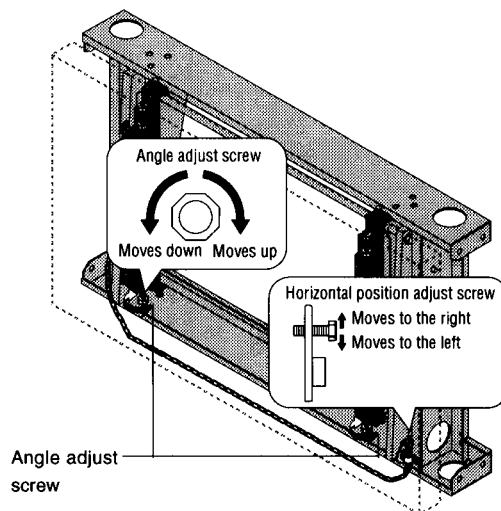


Angle adjust screw

## Mounting the Plasma Display


Pull both sides of the chain downward to draw the lower beam out towards you.

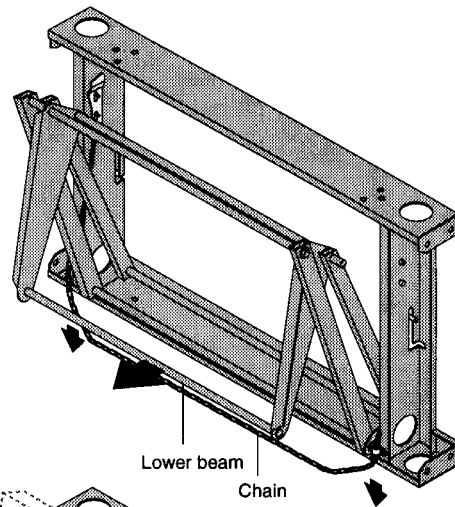

Mount the plasma display on which the display mount is already installed to the Multi Screen Mount Unit. Catch the hook in the display mount (upper) to the Multi Screen Mount Unit's front beam.

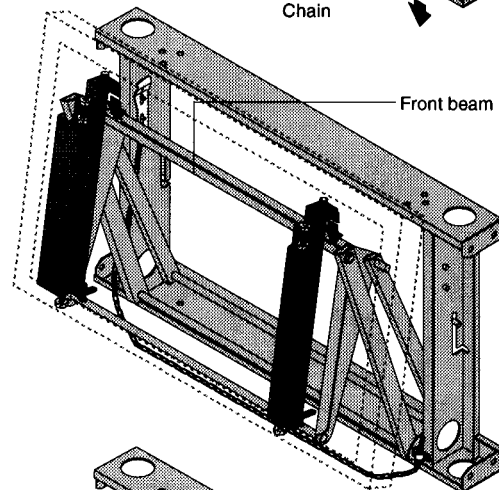


Set the hook in the display mount (lower) against the Multi Screen Mount Unit's lower beam.

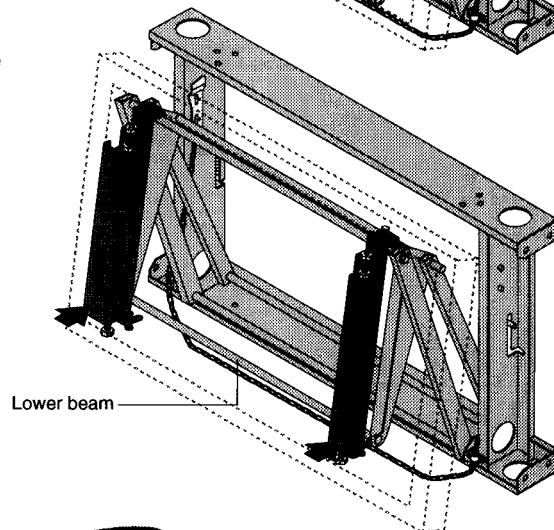


### Mounting the Plasma Display

Tighten the beam set screws located at the top and bottom of the display mount to fasten to the Multi Screen Mount Unit.

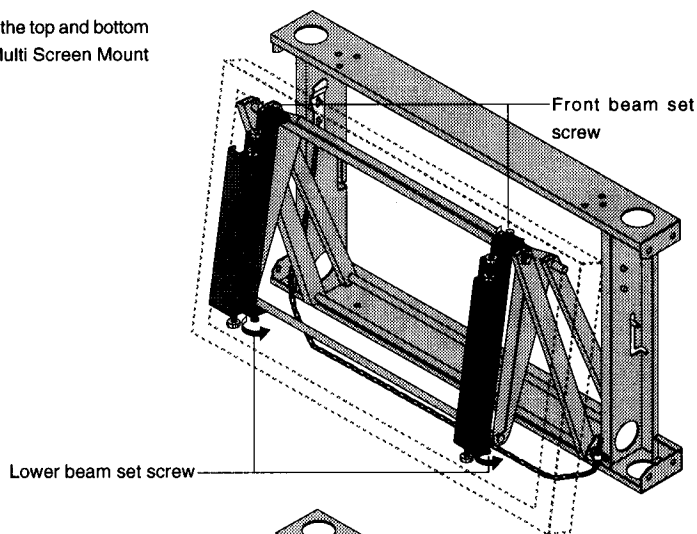

Press on the top sides of the plasma display to stow it in the main unit.

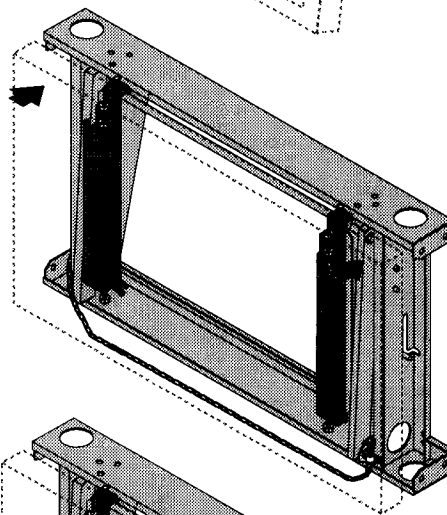

Adjusting the positions of the plasma displays

- To adjust the angle, use the angle adjust screws located at the bottom of the display fitting to adjust in the vertical direction.
- Use the horizontal position adjust screws located at the sides of the Multi Screen Mount Units to adjust the horizontal position.

\* For details see page 10.

