


NU-AC300B

NU-AC Series

300 W Black

The Design Solution

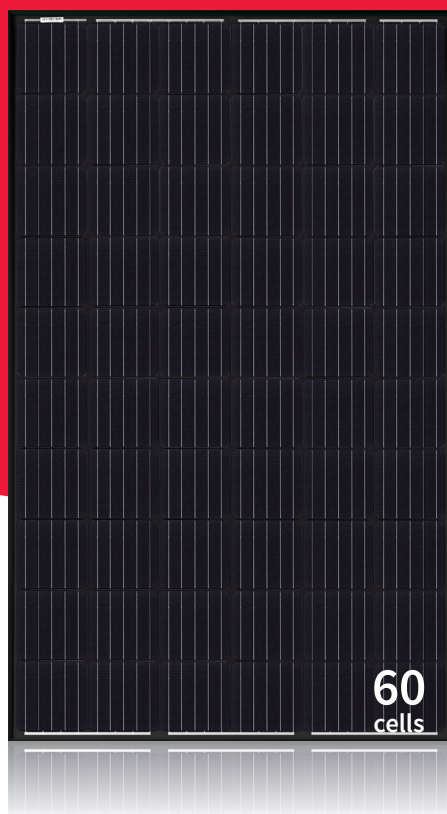

Powerful product features



PERC technology

High module efficiency 18.3%



Guaranteed positive power tolerance (0/+5%)



5 busbar technology

Improved reliability

Higher efficiency

Reduced series resistance



Tested and certified

VDE, IEC/EN61215, IEC/EN61730



Safety class II, CE

Application class A



Fire rating class C

MCS accredited product



Monocrystalline silicon photovoltaic modules



Portrait or landscape mounting



Robust product design
PID resistance test passed

Your solar partner for life



60 years of solar expertise



Linear power output guarantee



Product guarantee



Local support team in Europe



50 million PV modules installed



Top PV brand award



Energy Solutions

SHARP
Be Original.

*Applicable for modules installed in countries as shown in the guarantee conditions.

Electrical data (STC)

NU-AC300B			
Maximum power	P_{max}	300	W_p
Open-circuit voltage	V_{oc}	40.03	V
Short-circuit current	I_{sc}	9.71	A
Voltage at point of maximum power	V_{mpp}	32.68	V
Current at point of maximum power	I_{mpp}	9.18	A
Module efficiency	η_m	18.3	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within $\pm 10\%$ of the indicated values of I_{sc} , V_{oc} and 0 to +5% of P_{max} (power measurement tolerance $\pm 3\%$).

Reduction of efficiency from an irradiance change of 1,000 W/m² to 200 W/m² ($T_{module} = 25\text{ °C}$) is less than 3%.

Electrical data (NMOT)

NU-AC300B			
Maximum power	P_{max}	224.13	W_p
Open-circuit voltage	V_{oc}	37.94	V
Short-circuit current	I_{sc}	7.87	A
Voltage at point of maximum power	V_{mpp}	30.50	V
Current at point of maximum power	I_{mpp}	7.35	A

NMOT = Nominal Module Operating Temperature: 45 °C, irradiance 800 W/m², air temperature of 20 °C, wind speed of 1 m/s.

Mechanical data

Length	1,650 mm
Width	992 mm
Depth	35 mm
Weight	18.5 kg

Temperature coefficient

P_{max}	-0.375%/°C
V_{oc}	-0.273%/°C
I_{sc}	0.037%/°C


Limit values

Maximum system voltage	1,000 VDC
Over-current protection	15 A
Temperature range	-40 to 85 °C
Max. mechanical load (snow/wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

Packaging data

Modules per pallet	30 pcs
Pallet size (L x W x H)	1.70 m x 1.10 m x 1.15 m
Pallet weight	Approx. 605 kg

Dimensions (mm)

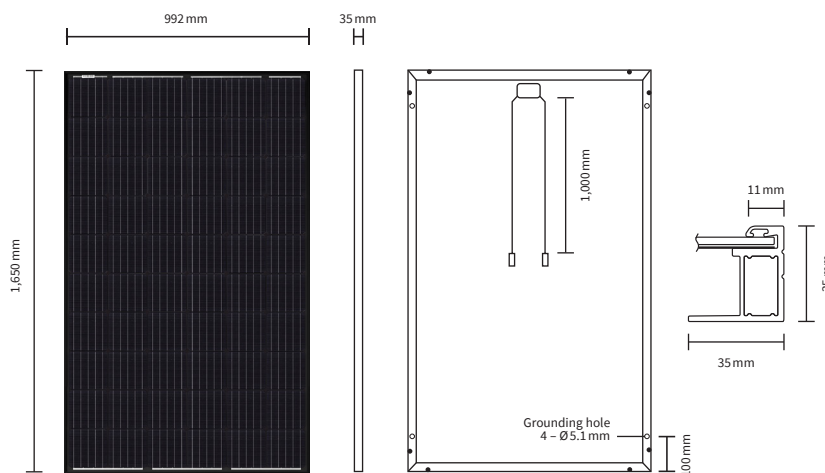

*Please refer to SHARP's installation manual for details.

General data

Cells	Monocrystalline silicon, 157 mm x 157 mm, 60 cells in series
Front glass	Anti-reflective high transmissive low iron tempered glass, 3.2 mm
Frame	Anodized aluminium alloy, black
Backsheet	Black
Connection box	IP67 rating, 3 bypass diodes
Cable	Ø 4.0 mm ² , length 1,000 mm
Connector	MC4 (Multi Contact, Stäubli)