



AUDIX Technology (Shenzhen) Co., Ltd.
52 Block, Shenzhen Science & Industry Park,
Nantou, Shenzhen, Guangdong, China

Tel : 0755-26639495 6-7
Fax : 86 0755-26632877

Technical Compliance Statement

No. ACS-E13315

The following products have been tested by us with the listed standards and found in compliance with the council EMC directive 2004/108/EC. It is demonstrative for the compliance with this EMC Directive.

Submitter : TPV Electronics (FuJian) Co., Ltd.
Shangzheng, Yuan Hong Road, Fuqing City, Fujian Province,
P.R. China
Product : LCD Monitor
Product Name : EA273Wmi, MultiSync EA273Wmi, EA273Wmi-BK

Brand Name	Model No.
NEC	L270UL

Test Standards :

EN 55022: 2010+AC:2011 (Class B) AS/NZS CISPR 22: 2009+A1:2010	Limits and methods of measurement of radio disturbance characteristics of information technology equipment
EN61000-3-2:2006+A1:2009+A2:2009	Electromagnetic compatibility(EMC) Part 3 :Limits Section 2 : Limits for harmonic current emissions (equipment input current $\leq 16A$ per phase)
EN 61000-3-3:2008	Electromagnetic compatibility(EMC) Part 3 :Limits Section 3 : Limits of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current $\leq 16A$
EN 55024: 2010	Information technology equipment-Immunity characteristics limits and methods of measurement
IEC 61000-4-2: 2008	Electrostatic discharge
IEC 61000-4-3: 2010	RF Field Strength susceptibility
IEC 61000-4-4: 2012	Electrical Fast transients
IEC 61000-4-5: 2005	Surge
IEC 61000-4-6: 2008	Conducted Susceptibility
IEC 61000-4-8: 2009	Magnetic field immunity
IEC 61000-4-11: 2004	Dips / Voltage Interruption Variation

Stamp only for EMC Dept. Report

Signature: David Jin



David Jin
Deputy Manager
Date : Jul.15, 2013

The statement is based on a single evaluation of one sample of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab. logo.

EMC TEST REPORT

for

TPV Electronics (FuJian) Co., Ltd.

LCD Monitor

Product Name : EA273WMi, MultiSync EA273WMi, EA273WMi-BK

Brand Name	Model No.
NEC	L270UL

Prepared for : TPV Electronics (FuJian) Co., Ltd.
Shangzheng, Yuan Hong Road, Fuqing City, Fujian
Province, P.R. China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496
Fax: (0755) 26632877

Report Number : ACS-E13315
Date of Test : Jun.23 ~ 29, 2013
Date of Report : Jul.15, 2013

TABLE OF CONTENTS

Description	Page
Test Report Verification.....	6
1. SUMMARY OF STANDARDS AND RESULTS.....	7
1.1. Description of Standards and Results	7
2. GENERAL INFORMATION.....	8
2.1. Description of Device (EUT).....	8
2.2. Tested Supporting System Details	9
2.3. Block Diagram of connection between EUT and simulators.....	10
2.4. Test Facility	12
2.5. Measurement Uncertainty	12
3. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST	13
3.1. Test Equipment	13
3.2. Block Diagram of Test Setup.....	13
3.3. Test Standard	13
3.4. Power Line Conducted Emission at Mains Terminals Limit	13
3.5. EUT Configuration on Test	13
3.6. Operating Condition of EUT	14
3.7. Test Procedure	14
3.8. Conducted Disturbance at Mains Terminals Test Results	14
4. RADIATED DISTURBANCE MEASUREMENT	31
4.1. Test Equipments.....	31
4.2. Block Diagram of Test Setup.....	32
4.3. Test Standard	33
4.4. Radiated Emission Limit.....	33
4.5. EUT Configuration on Test	33
4.6. Operating Condition of EUT	33
4.7. Test Procedure	33
4.8. Radiated Emission Test Results.....	34
5. HARMONIC CURRENT TEST	59
5.1. Test Equipments.....	59
5.2. Block Diagram of Test Setup.....	59
5.3. Test Standard	59
5.4. Limits of Harmonic Current.....	59
5.5. EUT Configuration on Test	59
5.6. Operating Condition of EUT	59
5.7. Test Procedure	59
5.8. Test Results.....	60
6. VOLTAGE FLUCTUATIONS & FLICKER TEST	64
6.1. Test Equipment	64
6.2. Block Diagram of Test Setup.....	64
6.3. Test Standard	64
6.4. Limits of Voltage Fluctuation and Flick	64
6.5. EUT Configuration on Test	64
6.6. Operating Condition of EUT	64
6.7. Test Procedure	64
6.8. Test Results.....	64
7. IMMUNITY PERFORMANCE CRITERIA.....	66
8. ELECTROSTATIC DISCHARGE IMMUNITY TEST	67
8.1. Test Equipments.....	67

8.2.	Block Diagram of Test Setup	67
8.3.	Test Standard	67
8.4.	Severity Levels and Performance Criterion	67
8.5.	EUT Configuration	67
8.6.	Operating Condition of EUT	67
8.7.	Test Procedure	68
8.8.	Test Results	68
9.	RF FIELD STRENGTH SUSCEPTIBILITY TEST	70
9.1.	Test Equipments	70
9.2.	Block Diagram of Test Setup	70
9.3.	Test Standard	70
9.4.	Test Severity Level and Performance Criterion	70
9.5.	EUT Configuration	70
9.6.	Operating Condition of EUT	70
9.7.	Test Procedure	71
9.8.	Test Results	71
10.	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	73
10.1.	Test Equipments	73
10.2.	Block Diagram of Test Setup	73
10.3.	Test Standard	73
10.4.	Severity Levels and Performance Criterion	73
10.5.	EUT Configuration	73
10.6.	Operating Condition of EUT	73
10.7.	Test Procedure	74
10.8.	Test Results	74
11.	SURGE TEST	76
11.1.	Test Equipments	76
11.2.	Block Diagram of Test Setup	76
11.3.	Test Standard	76
11.4.	Severity Levels and Performance Criterion	76
11.5.	EUT Configuration	76
11.6.	Operating Condition of EUT	76
11.7.	Test Procedure	77
11.8.	Test Results	77
12.	INJECTED CURRENTS SUSCEPTIBILITY TEST	79
12.1.	Test Equipments	79
12.2.	Block Diagram of Test Setup	79
12.3.	Test Standard	79
12.4.	Severity Levels and Performance Criterion	79
12.5.	EUT Configuration	79
12.6.	Operating Condition of EUT	79
12.7.	Test Procedure	80
12.8.	Test Results	80
13.	MAGNETIC FIELD IMMUNITY TEST	82
13.1.	Test Equipments	82
13.2.	Block Diagram of Test Setup	82
13.3.	Test Standard	82
13.4.	Severity Levels and Performance Criterion	82
13.5.	EUT Configuration on Test	82
13.6.	Operating Condition of EUT	82
13.7.	Test Procedure	82
13.8.	Test Results	82
14.	VOLTAGE DIPS AND INTERRUPTIONS TEST	84
14.1.	Test Equipment	84
14.2.	Block Diagram of Test Setup	84
14.3.	Test Standard	84

14.4.	Severity Levels and Performance Criterion	84
14.5.	EUT Configuration	84
14.6.	Operating Condition of EUT	84
14.7.	Test Procedure	84
14.8.	Test Results	84
15.	PHOTOGRAPHS	86
15.1.	Photos of Power Line Conducted Emission Test.....	86
15.2.	Photos of Radiated Emission Test (In Anechoic Chamber).....	88
15.3.	Photo of Harmonic / Flicker Test.....	91
15.4.	Photos of Electrostatic Discharge Immunity Test.....	92
15.5.	Photo of RF Strength Susceptibility Test.....	93
15.6.	Photo of Electrical Fast Transient/Burst Immunity Test.....	93
15.7.	Photo of Surge Test.....	94
15.8.	Photo of Injected Currents Susceptibility Test	94
15.9.	Photo of Magnetic Field Test.....	95
15.10.	Photo of Voltage Dips and interruptions test	95

TEST REPORT VERIFICATION

Applicant : TPV Electronics (FuJian) Co., Ltd.

EUT Description : LCD Monitor

Product Name : EA273WMi, MultiSync EA273WMi, EA273WMi-BK

(A) Model No. & :	Brand Name	Model No.
Brand Name	NEC	L270UL

(B) Power Supply : AC 100V-240V, 50/60Hz

(C) Test Voltage : AC 240V/50Hz

Measurement Standard Used:

AS/NZS CISPR 22: 2009+A1:2010, EN 55022: 2010+AC:2011 (Class B)
 EN 61000-3-2: 2006+A1:2009+A2:2009, EN 61000-3-3:2008
 EN 55024: 2010
 (IEC 61000-4-2:2008, IEC 61000-4-3: 2010, IEC 61000-4-4:2012,
 IEC 61000-4-5: 2005, IEC 61000-4-6:2008, IEC 61000-4-8:2009, IEC 61000-4-11:2004)

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the EN 55022, EN 61000-3-2, EN 61000-3-3 and EN 55024 requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

Date of Test : Jun.23~ 29, 2013 Report of date: Jul.15, 2013

Prepared by : Lisa Liang
 Lisa Liang / Assistant

Reviewed by : Jack Zhong
 Jack Zhong / Assistant Manager



Approved & Authorized Signer :

David Jin / Deputy Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Results	Remark	
Conducted disturbance at mains terminals	EN 55022:2010+AC:2011	PASS	Meets Class B Minimum passing margin is 13.87dB at 3.2583MHz	
Conducted disturbance at telecommunication port	EN 55022:2010+AC:2011	N/A	N/A	
Radiated disturbance (30-1000MHz)	EN 55022:2010+AC:2011	PASS	Meets Class B Minimum passing margin is 4.08dB at 130.285MHz	
Radiated disturbance (1-6GHz)	EN 55022:2010+AC:2011	PASS	Meets Class B Minimum passing margin is 16.44dB at 1641.360MHz	
Harmonic current emissions	EN 61000-3-2:2006+A1:2009+A2:2009	PASS	Meets the Class D requirement	
Voltage fluctuations & flicker	EN 61000-3-3:2008	PASS	Meets the requirement	
IMMUNITY (EN 55024:2010)				
Description of Test Item	Basic Standard	Results	Performance Criteria	Observation Criteria
Electrostatic discharge (ESD)	IEC 61000-4-2:2008	PASS	B	A & B
Radio-frequency,Continuous radiated disturbance	IEC 61000-4-3: 2010	PASS	A	A
Electrical fast transient (EFT)	IEC 61000-4-4: 2012	PASS	B	A & B
Surge (Input a.c. power port)	IEC 61000-4-5:2005	PASS	B	A & B
Surge(Telecommunication port)		N/A	N/A	N/A
Radio-frequency,Continuous conducted disturbance	IEC 61000-4-6:2008	PASS	A	A
Power frequency magnetic field	IEC 61000-4-8:2009	PASS	A	A
Voltage dips, >95% reduction	IEC 61000-4-11:2004	PASS	B	A
Voltage dips, 30% reduction		PASS	C	A
Voltage interruptions		PASS	C	B
N/A is an abbreviation for Not Applicable.				

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : LCD Monitor

Model Number & Brand Name	Brand Name	Model No.
	NEC	L270UL

Product Name : EA273Wmi, MultiSync EA273Wmi, EA273Wmi-BK

Applicant : TPV Electronics (FuJian) Co., Ltd.
Shangzheng, Yuan Hong Road, Fuqing City, Fujian
Province, P.R. China

Max Resolution : 1920*1080@60Hz

Max Work Frequency : 148.5MHz

Panel : Manufacturer : LGD; M/N: LM270WF5

Power Cord : Unshielded, Detachable, 1.8/1.5m (3Pins)

DVI Cable : Shielded, Detachable, 1.8/1.5m (Bonded two ferrite cores)

VGA Cable : Shielded, Detachable, 1.8/1.5m (Bonded two ferrite cores)

Display Cable : Shielded, Detachable, 1.8/1.5m

HDMI Cable : Shielded, Detachable, 1.8/1.5m

Audio Cable : Shielded, Detachable, 1.8/1.5m

USB Cable : Unshielded, Detachable, 1.8/1.5m(Bonded two ferrite cores)

Date of Test : Jun.23~29, 2013

Date of Receipt : Jun.20, 2013

Sample Type : Prototype production


2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	Personal Computer	Test PC R	DELL	Vostro 470	G2945W1	☒ FCC DoC ☒ BSMI ID:R33002
		Power Cord: Unshielded, Detachable, 1.8m Display Card: (Display port+DVI+HDMI)				
2.	USB Keyboard	ACS-EMC- K03R	DELL	SK-8115	CN-ODJ313-7161 6-711-04WJ	☒ FCC DoC ☒ BSMI ID: T3A002
		Power Cord: shielded, Undetachable, 2.0m				
3.	USB Mouse	ACS-EMC-M03R	DELL	M056UO	512023253	☒ FCC DoC ☒ BSMI ID: R41108
		Power Cord: shielded, Undetachable, 1.8m				
4.	Printer	ACS-EMC-PT04	HP	C9079A	N/A	☒ FCC DoC ☒ BSMI ID: R33001
		USB Cable: Shielded, Detachable, 1.8m Power Cord: Unshielded, Detachable, 1.8m Power Adapter: HP, M/N: 0957-2119, BSMI ID: R33030 DC Cable: Unshielded, Detachable, 1.5m				
5.	HDD	ACS-EMC-HDD01	Terasys	F12-UF	A0100215-53900 18	☒ FCC DoC ☒ BSMI ID: 4912A022
		USB Cable: shielded, Detachable, 1.0m				
6.	Headphone	ACS-EMC-EP01	OVANN	OV880V	N/A	N/A
		Power Cord:Shielded, Undetachable, 4.0m				
7.	Ipod	ACS-EMC-IP01	APPLE	A1199	YM706MLDVQ5	☒ FCC DoC ☒ BSMI ID: R33057
		Power Cord:Shielded, Detachable, 1.0m				
8.	Ipod	ACS-EMC-IP02	APPLE	A1199	YM706MCQVQ5	☒ FCC DoC ☒ BSMI ID: R33057
		Power Cord:Shielded, Detachable, 1.0m				
9.	Ipod	ACS-EMC-IP03	APPLE	A1199	YM711H3LVQ5	☒ FCC DoC ☒ BSMI ID: R33057
		Power Cord:Shielded, Detachable, 1.0m				
10.	Ipod	ACS-EMC-IP04	APPLE	A1199	YM706N0EVQ5	☒ FCC DoC ☒ BSMI ID: R33057
		Power Cord:Shielded, Detachable, 1.0m				


2.3. Block Diagram of connection between EUT and simulators

For EMI Tests


PC Mode:

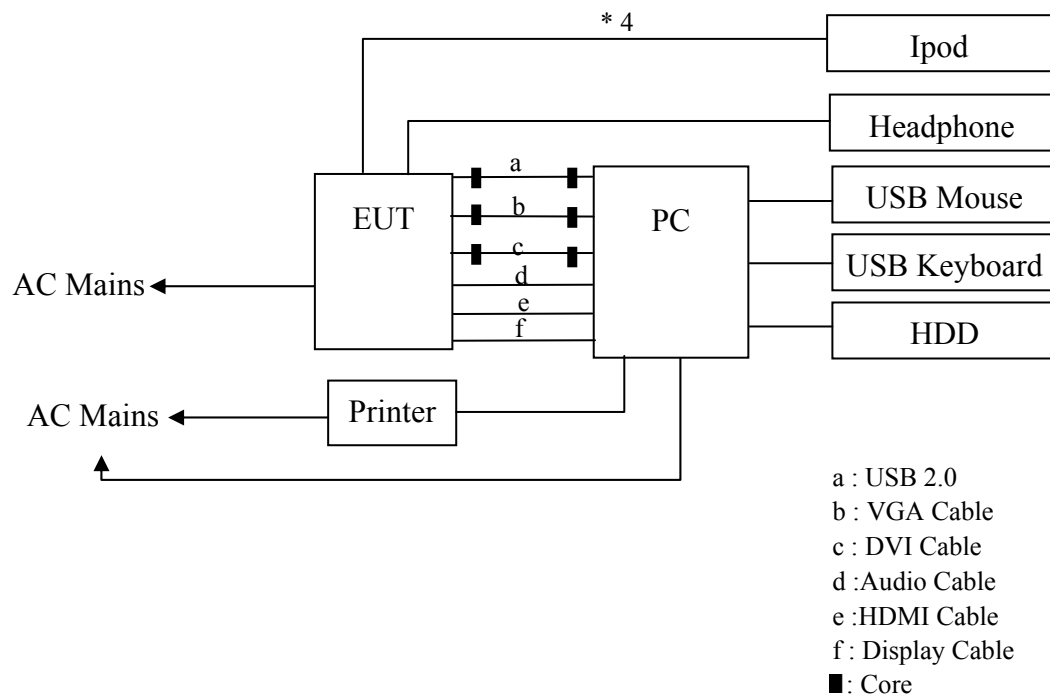

DVD Mode:

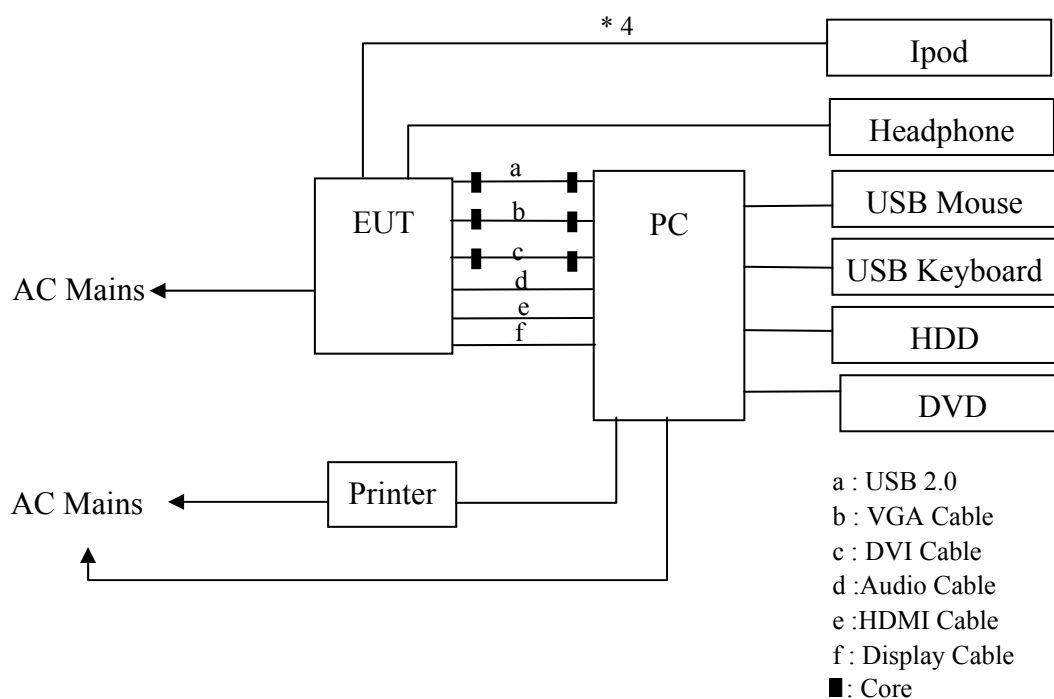

For EMS Tests

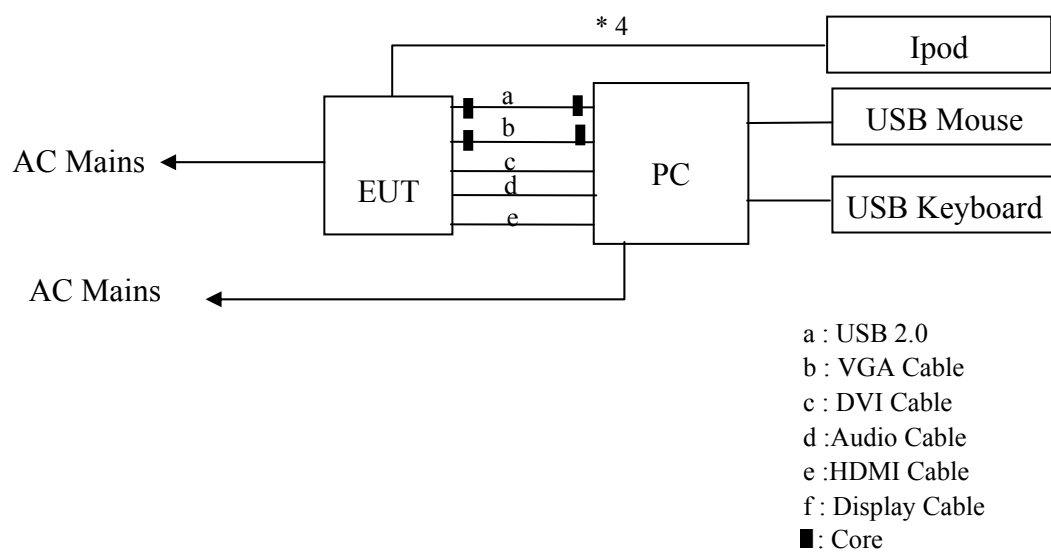

(EUT: LCD Monitor)

2.4. Test Facility

Site Description

Name of Firm	: Audix Technology (Shenzhen) Co., Ltd. No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China
3m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 90454 Valid Date: Feb.22, 2015
3m & 10m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 794232 Valid Date: Oct.31, 2015
EMC Lab.	: Certificated by DAkkS, Germany Registration No: D-PL-12151-01-01 Valid Date: Feb.01, 2014
	Accredited by NVLAP, USA NVLAP Code: 200372-0 Valid Date: Mar.31, 2014

2.5. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 2 Conduction	3.06dB
Uncertainty for Radiation Emission test in 10m chamber (Distance: 10m)	3.31dB (30~200MHz, Polarize: H)
	3.21dB (30~200MHz, Polarize: V)
	3.49dB (200M~1GHz, Polarize: H)
	3.39dB (200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.04dB (Distance: 3m Polarize: V)
	5.06dB (Distance: 3m Polarize: H)
Uncertainty for Flicker test	5.18%
Uncertainty for Harmonic test	9.4%
Uncertainty for C/S Test	1.36dB (Using CDN test)
	3.20 (Using EM clamp test)
Uncertainty for R/S Test	1.64dB (80MHz~200MHz)
	1.66dB(200MHz~1000MHz)
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST

3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	May.08, 13	1 Year
2	L.I.S.N.#1	Rohde & Schwarz	ENV4200	100041	May.08, 13	1 Year
3	L.I.S.N.#2	Kyoritsu	KNW-407	8-1628-5	May.08, 13	1 Year
4	Terminator	Hubersuhner	50Ω	No. 1	May.08, 13	1 Year
5	Terminator	Hubersuhner	50Ω	No. 2	May.08, 13	1 Year
6	RF Cable	Fujikura	3D-2W	No.2	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	6200298346	May.08, 13	1 Year
8	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	May.08, 13	1 Year

3.2. Block Diagram of Test Setup

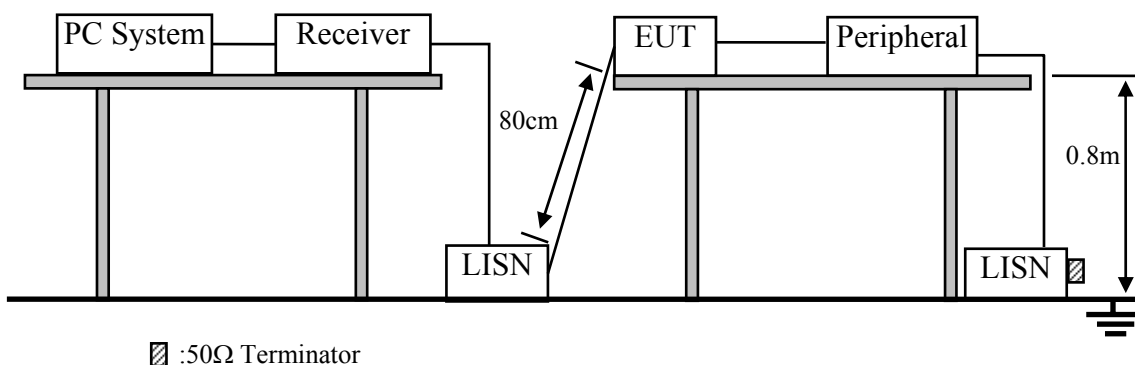

3.3. Test Standard

EN55022: 2010+AC:2011, Class B

3.4. Power Line Conducted Emission at Mains Terminals Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.5. EUT Configuration on Test

The following equipments are installed on Conducted Emission Test to meet EN 55022 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.5.1. LCD Monitor (EUT)

Model Number : L270UL

Serial Number : N/A

3.5.2. Support Equipment : As Tested Supporting System Detail, in Section 2.2.

3.6. Operating Condition of EUT

- 3.6.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.6.2. Turned on the power of all equipment.
- 3.6.3. PC system ran the Self-test program “EMC Test. exe” by windows XP and sent “H” Character to LCD Monitor (EUT) through DVI / VGA / Display / HDMI card, the Screen of EUT displayed and filled with “H” pattern.
- 3.6.4. The PC system was running the program “1kHz signal Playing” and sending sound to EUT
- 3.6.5. The PC system was reading / writing data from / into HDD during testing.
- 3.6.6. DVD Mode: The DVD player played DVD Disk and sent “DVD 1kHz Signal Playing” image to the LCD Monitor (EUT).
- 3.6.7. The other peripheral devices were driven and operated in turn during all testing.

3.7. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 55022 Class B on conducted Disturbance test. The bandwidth of test receiver (R & S ESHS20) is set at 9kHz. The frequency range from 150kHz to 30MHz is checked. The test results are reported and test results for Conducted Disturbance Test on Section 3.8.

3.8. Conducted Disturbance at Mains Terminals Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

The EUT with the following test modes were tested and selected (No.3~9) to read Q.P values, all the test results are listed in next pages.

EUT: LCD Monitor

Model No. : L270UL

Test Date: Jun.18, 2013


Temperature: 23.1℃

Humidity: 53%

No.	Cable Length	Input Port	Resolution & Frequency	Reference Test Data No.	
				Line	Neutral
1.	1.8m	VGA	640*480/60Hz	#20	#19
2.			1280*1024/75Hz	#22	#21
3.			1920*1080/60Hz	#24	#23
4.※		DVI	1920*1080/60Hz	#34	#33
5.		Display	1920*1080/60Hz	#26	#25
6.		VGA Panel is Vertical	1080*1920/60Hz	#30	#29
7.		HDMI	1920*1080/60Hz	#36	#35
8.		HDMI:1080P(DVD Playing)		#32	#31
9.	1.5m	VGA	1920*1080/60Hz	#28	#27


(※ Worst test mode)

Data: 20 File: E:\2013 Report data-CE\TPV\ACS1301065.EM6 (36) Date: 2013-06-24

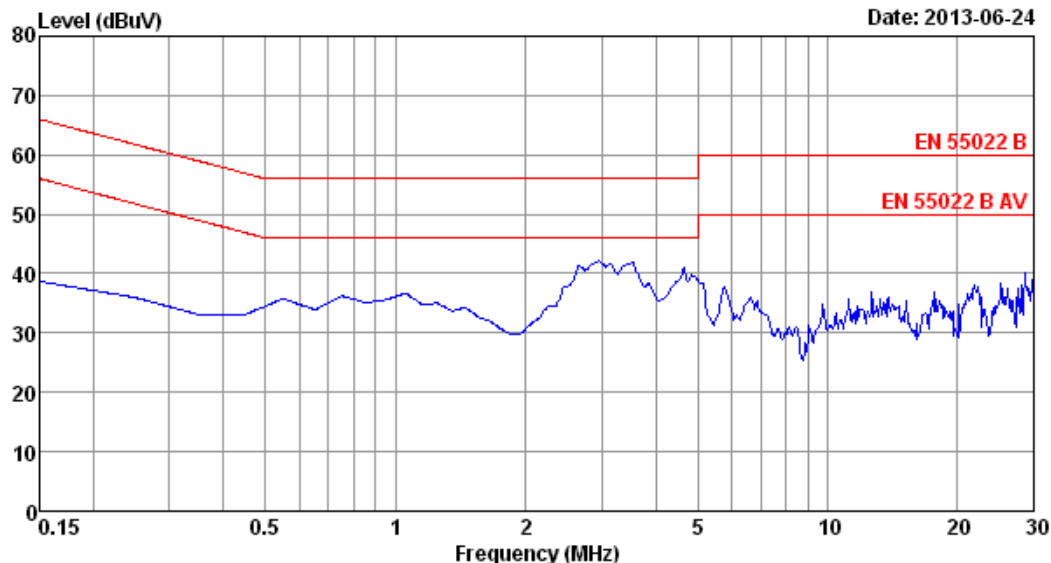


Site no :2# CE Data No :20
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:640*480@60Hz
 Line:1.8m


Data: 19 File: E:\2013 Report data-CE\TPV\ACS1301065.EM6 (36) Date: 2013-06-24

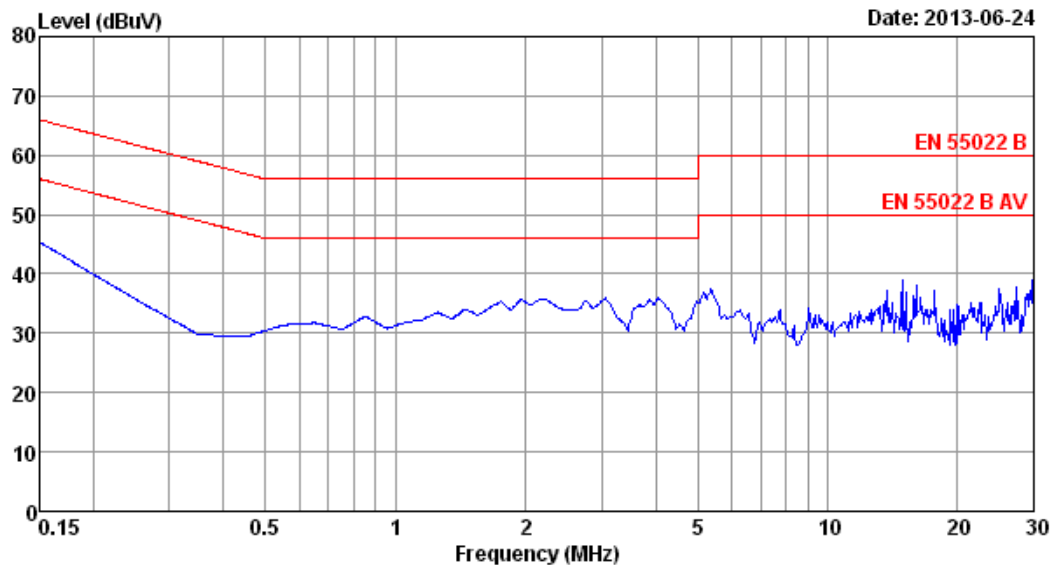


Site no :2# CE Data No :19
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:640*480@60Hz
 Line:1.8m

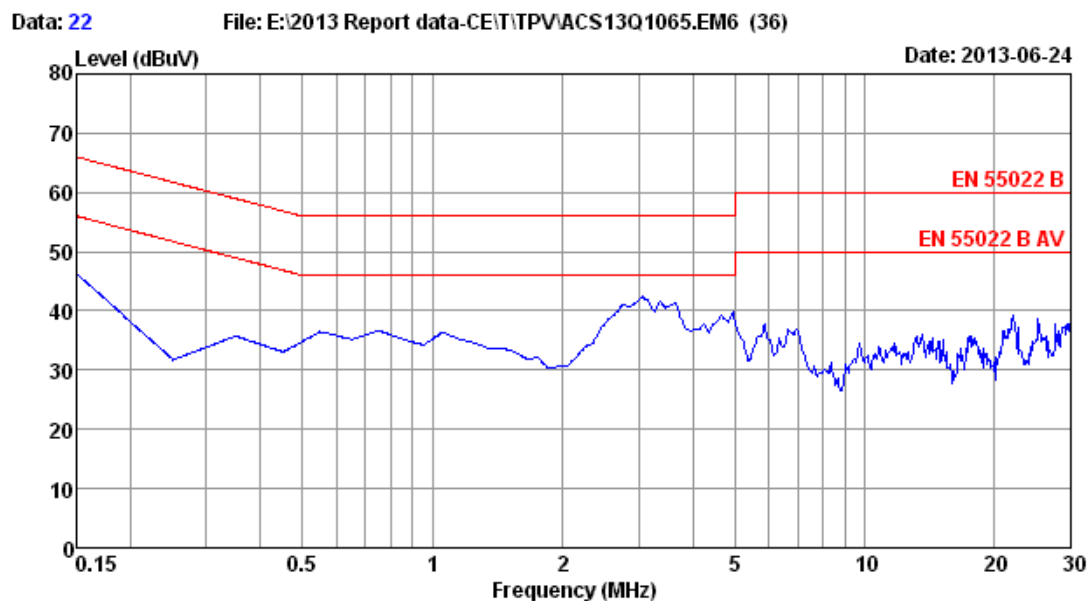

Site no	:2# CE	Data No	:22
Dis./Lisn	:13 ENV4200 L1	LISN phase:	LINE
Limit	:EN 55022 B		
Env./Ins.	:23.1°C/53%	Engineer	:Berg_Guo
EUT	:LCD Monitor M/N:L270UL		
Power Rating	:AC 240V/50Hz		
Test Mode	:Running "H" Pattern And 1kHz Playing		
	VGA:1280*1024@75Hz		
	Line:1.8m		

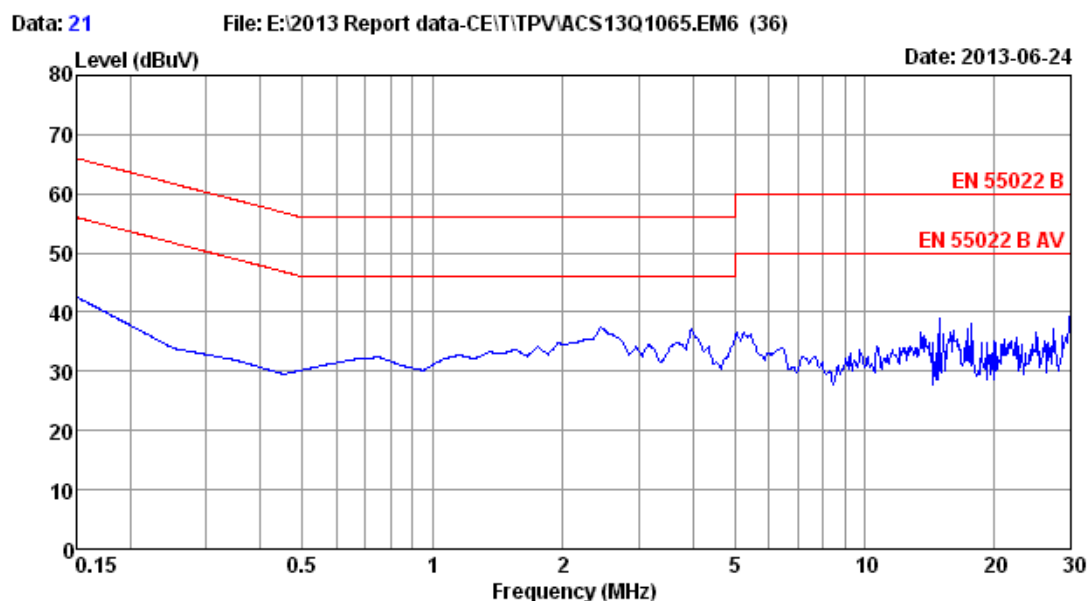


Site no	:2# CE	Data No	:21
Dis./Lisn	:13 ENV4200 N	LISN phase:	NEUTRAL
Limit	:EN 55022 B		
Env./Ins.	:23.1°C/53%	Engineer	:Berg_Guo
EUT	:LCD Monitor M/N:L270UL		
Power Rating	:AC 240V/50Hz		
Test Mode	:Running "H" Pattern And 1kHz Playing		
	VGA:1280*1024@75Hz		
	Line:1.8m		

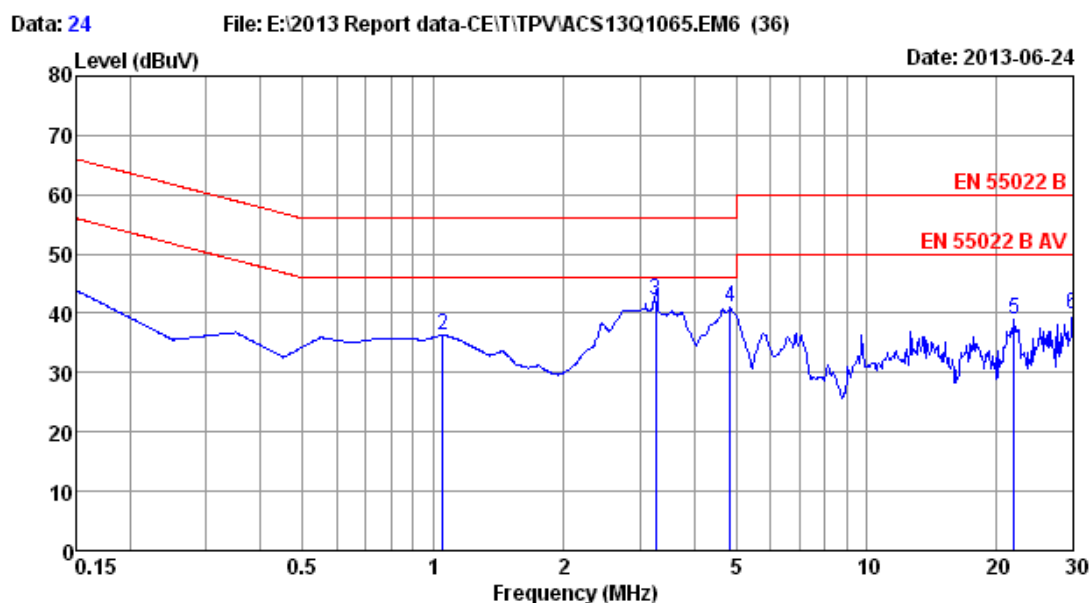

Site no :2# CE Data No :24
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.90	9.95	24.04	43.89	66.00	22.11	QP
2	1.0541	9.98	9.97	16.49	36.44	56.00	19.56	QP
3	3.2583	10.03	10.00	22.10	42.13	56.00	13.87	QP
4	4.8480	10.04	10.03	20.85	40.92	56.00	15.08	QP
5	21.9463	10.11	10.20	18.77	39.08	60.00	20.92	QP
6	30.0000	10.13	10.27	19.50	39.90	60.00	20.10	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

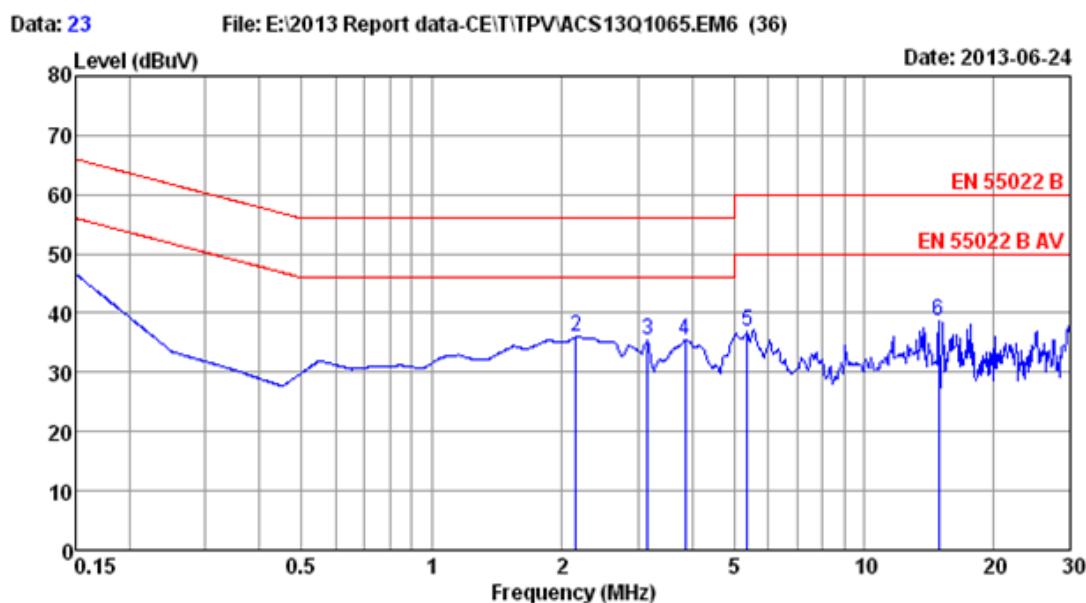

Site no :2# CE Data No :23
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	26.90	46.61	66.00	19.39	QP
2	2.1553	9.84	9.99	16.23	36.06	56.00	19.94	QP
3	3.1563	9.86	10.00	15.65	35.51	56.00	20.49	QP
4	3.8603	9.88	10.01	15.68	35.57	56.00	20.43	QP
5	5.3615	9.90	10.03	17.05	36.98	60.00	23.02	QP
6	14.9068	10.03	10.13	18.47	38.63	60.00	21.37	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

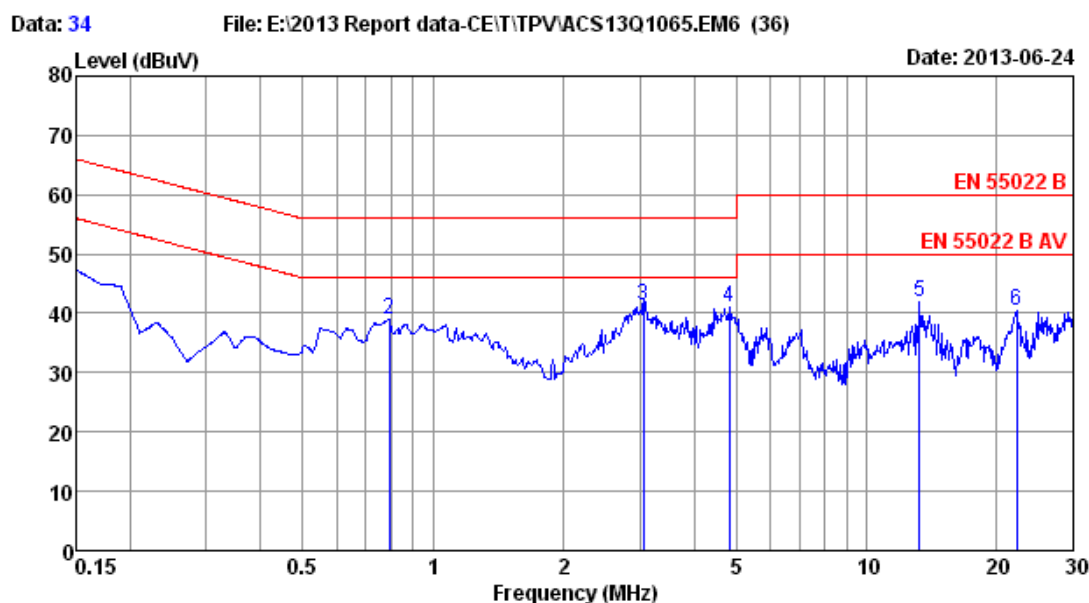

Site no :2# CE Data No :34
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.90	9.95	27.47	47.32	66.00	18.68	QP
2	0.7918	9.97	9.97	19.15	39.09	56.00	16.91	QP
3	3.0576	10.03	10.00	21.41	41.44	56.00	14.56	QP
4	4.8224	10.04	10.03	21.03	41.10	56.00	14.90	QP
5	13.2667	10.08	10.12	21.85	42.05	60.00	17.95	QP
6	22.1801	10.11	10.20	20.12	40.43	60.00	19.57	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

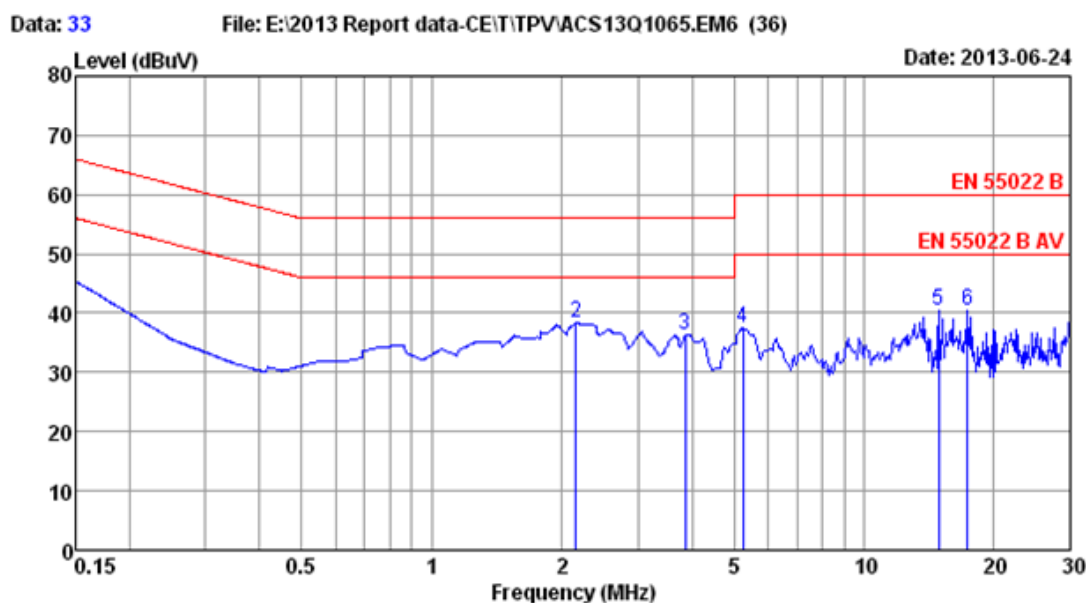

Site no :2# CE Data No :33
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	25.69	45.40	66.00	20.60	QP
2	2.1553	9.84	9.99	18.47	38.30	56.00	17.70	QP
3	3.8603	9.88	10.01	16.44	36.33	56.00	19.67	QP
4	5.2491	9.90	10.03	17.54	37.47	60.00	22.53	QP
5	14.9068	10.03	10.13	20.19	40.35	60.00	19.65	QP
6	17.3826	10.05	10.15	20.38	40.58	60.00	19.42	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

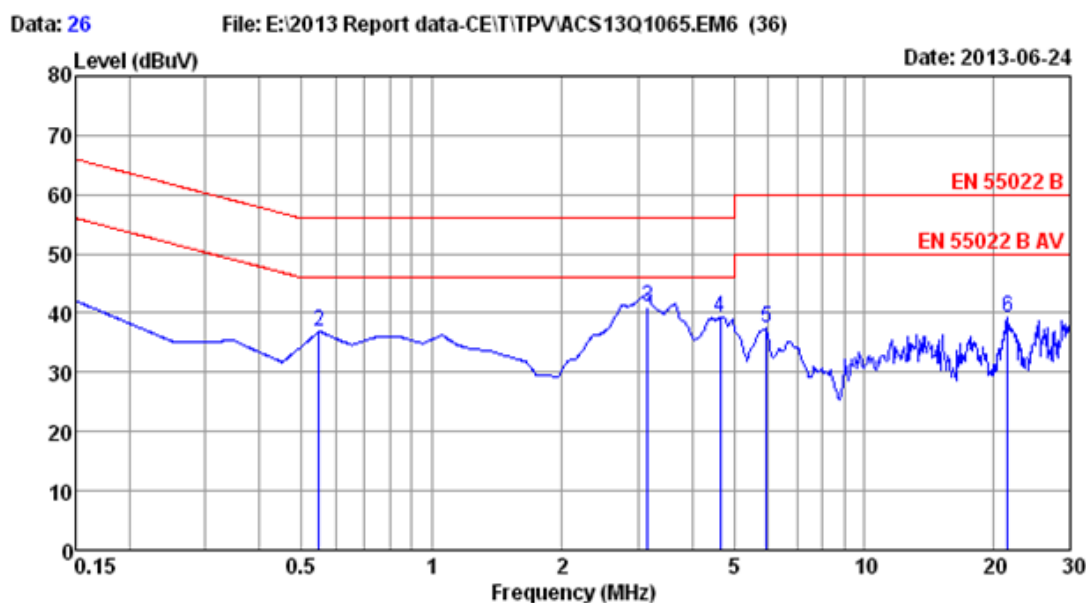

Site no :2# CE Data No :26
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 Display:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.90	9.95	22.23	42.08	66.00	23.92	QP
2	0.5493	9.94	9.96	17.05	36.95	56.00	19.05	QP
3	3.1563	10.03	10.00	21.04	41.07	56.00	14.93	QP
4	4.6469	10.04	10.02	19.34	39.40	56.00	16.60	QP
5	5.9608	10.05	10.04	17.42	37.51	60.00	22.49	QP
6	21.4860	10.11	10.19	18.89	39.19	60.00	20.81	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

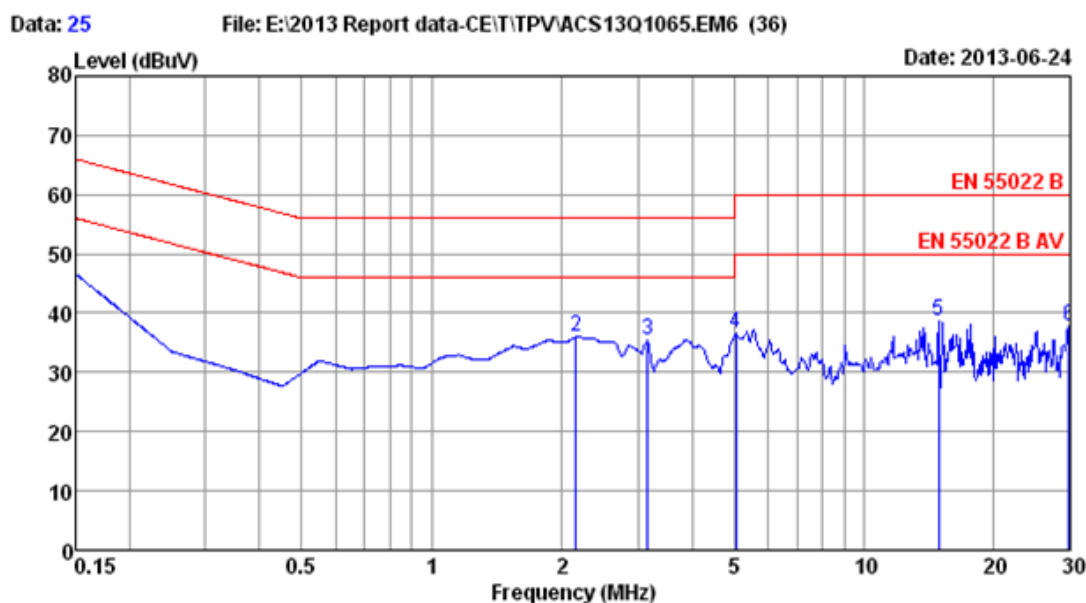

Site no :2# CE Data No :25
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 Display:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	26.90	46.61	66.00	19.39	QP
2	2.1553	9.84	9.99	16.23	36.06	56.00	19.94	QP
3	3.1563	9.86	10.00	15.65	35.51	56.00	20.49	QP
4	5.0580	9.90	10.03	16.59	36.52	60.00	23.48	QP
5	14.9068	10.03	10.13	18.47	38.63	60.00	21.37	QP
6	29.8415	10.10	10.27	17.53	37.90	60.00	22.10	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

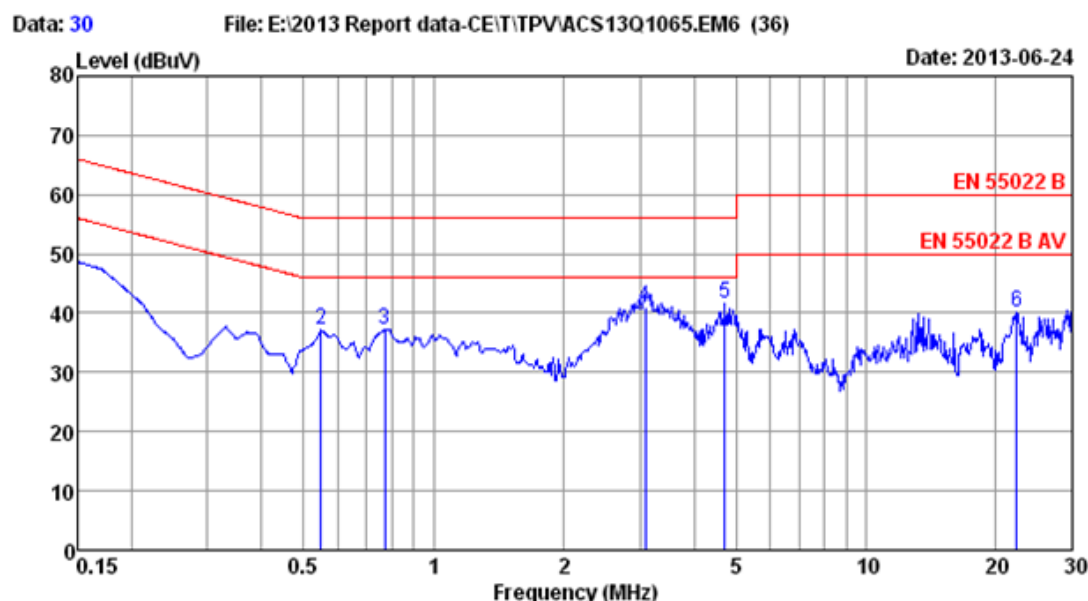

Site no :2# CE Data No :30
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1080*1920@60Hz
 Panel is Vertical
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.90	9.95	28.80	48.65	66.00	17.35	QP
2	0.5493	9.94	9.96	17.29	37.19	56.00	18.81	QP
3	0.7711	9.96	9.97	17.37	37.30	56.00	18.70	QP
4	3.0901	10.03	10.00	21.02	41.05	56.00	14.95	QP
5	4.7213	10.04	10.03	21.54	41.61	56.00	14.39	QP
6	22.2979	10.11	10.20	19.70	40.01	60.00	19.99	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

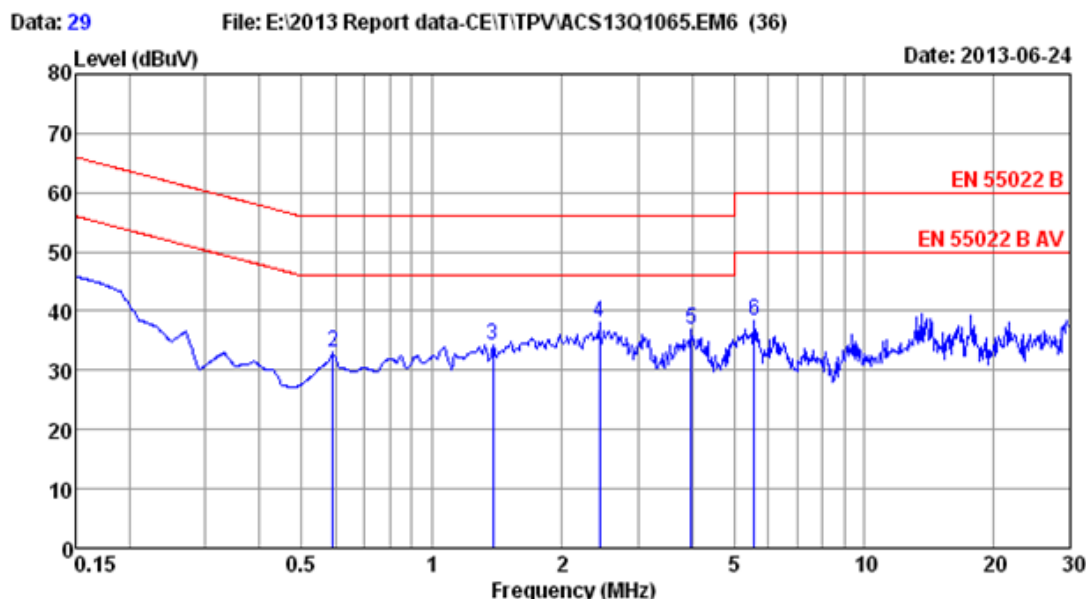

Site no :2# CE Data No :29
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1080*1920@60Hz
 Panel is Vertical
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	26.18	45.89	66.00	20.11	QP
2	0.5916	9.82	9.96	13.15	32.93	56.00	23.07	QP
3	1.3884	9.83	9.98	14.44	34.25	56.00	21.75	QP
4	2.4476	9.85	9.99	18.28	38.12	56.00	17.88	QP
5	3.9850	9.88	10.01	16.98	36.87	56.00	19.13	QP
6	5.5641	9.90	10.04	18.33	38.27	60.00	21.73	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

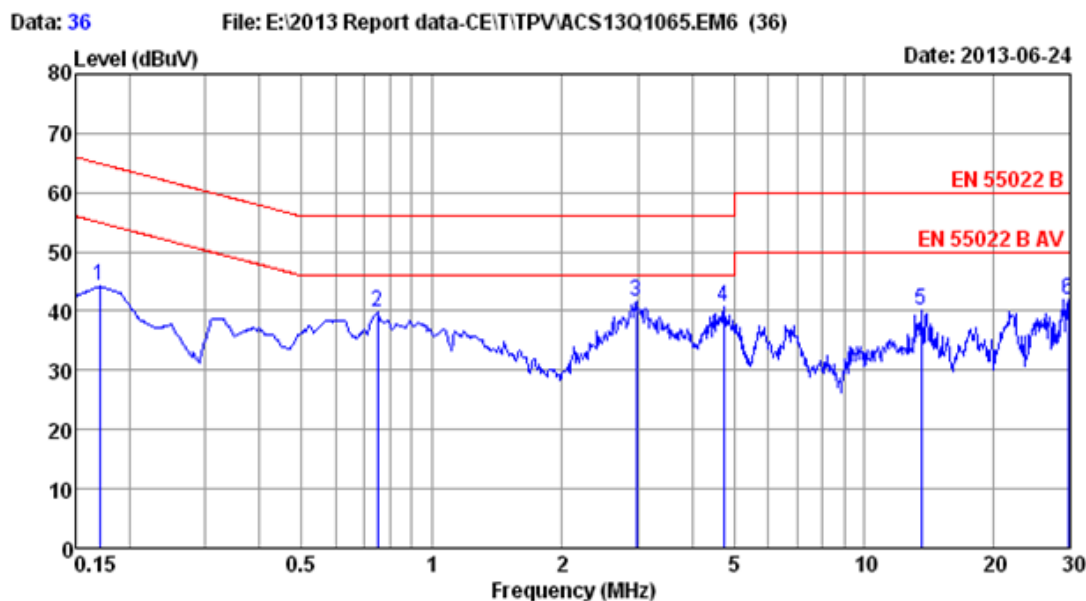

Site no :2# CE Data No :36
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1703	9.91	9.96	24.32	44.19	64.94	20.75	QP
2	0.7509	9.96	9.97	19.79	39.72	56.00	16.28	QP
3	2.9776	10.03	10.00	21.61	41.64	56.00	14.36	QP
4	4.7464	10.04	10.03	20.80	40.87	56.00	15.13	QP
5	13.5509	10.08	10.12	19.92	40.12	60.00	19.88	QP
6	29.6838	10.13	10.27	21.50	41.90	60.00	18.10	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

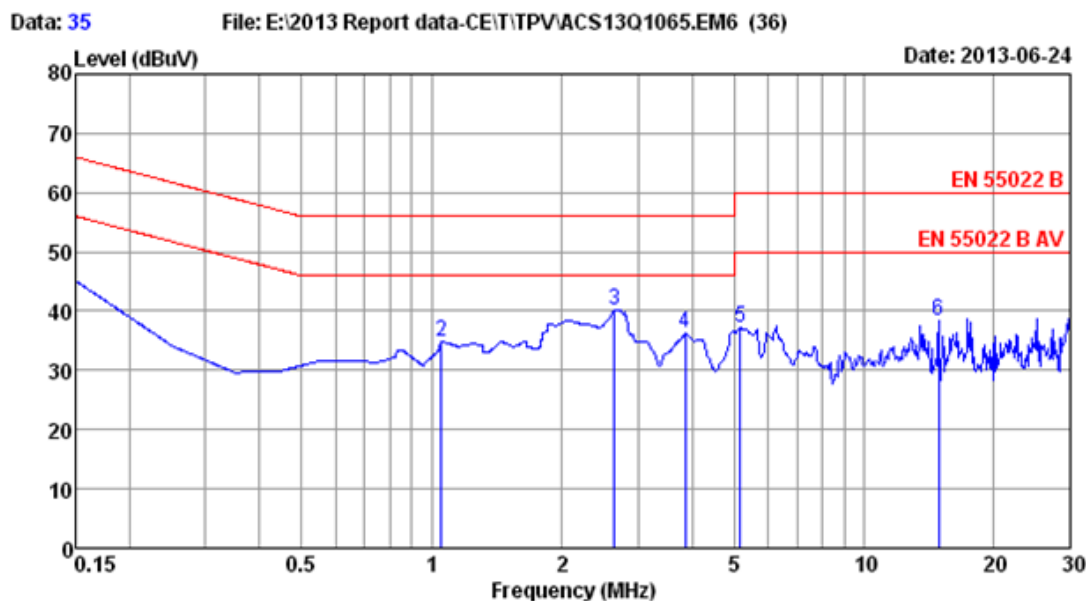

Site no :2# CE Data No :35
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 240V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	25.41	45.12	66.00	20.88	QP
2	1.0541	9.83	9.97	15.06	34.86	56.00	21.14	QP
3	2.6500	9.85	9.99	20.37	40.21	56.00	15.79	QP
4	3.8603	9.88	10.01	16.29	36.18	56.00	19.82	QP
5	5.1663	9.90	10.03	17.36	37.29	60.00	22.71	QP
6	14.9068	10.03	10.13	18.33	38.49	60.00	21.51	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

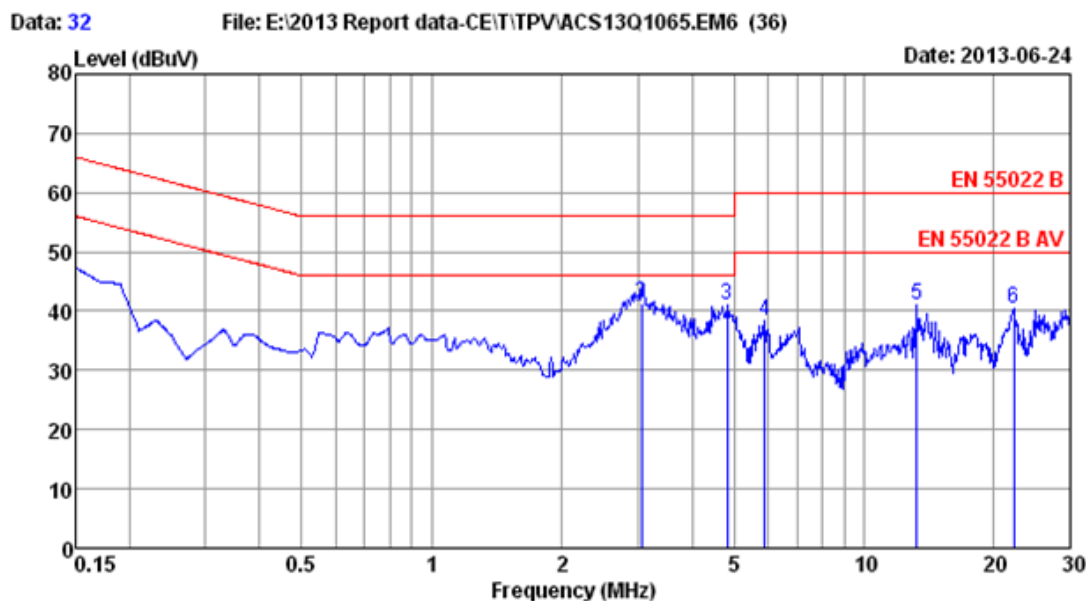

Site no :2# CE Data No :32
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :DVD Playing
 HDMI:1080P
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.90	9.95	27.47	47.32	66.00	18.68	QP
2	3.0576	10.03	10.00	21.41	41.44	56.00	14.56	QP
3	4.8224	10.04	10.03	21.03	41.10	56.00	14.90	QP
4	5.8980	10.05	10.04	18.42	38.51	60.00	21.49	QP
5	13.2667	10.08	10.12	20.85	41.05	60.00	18.95	QP
6	22.1801	10.11	10.20	20.12	40.43	60.00	19.57	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

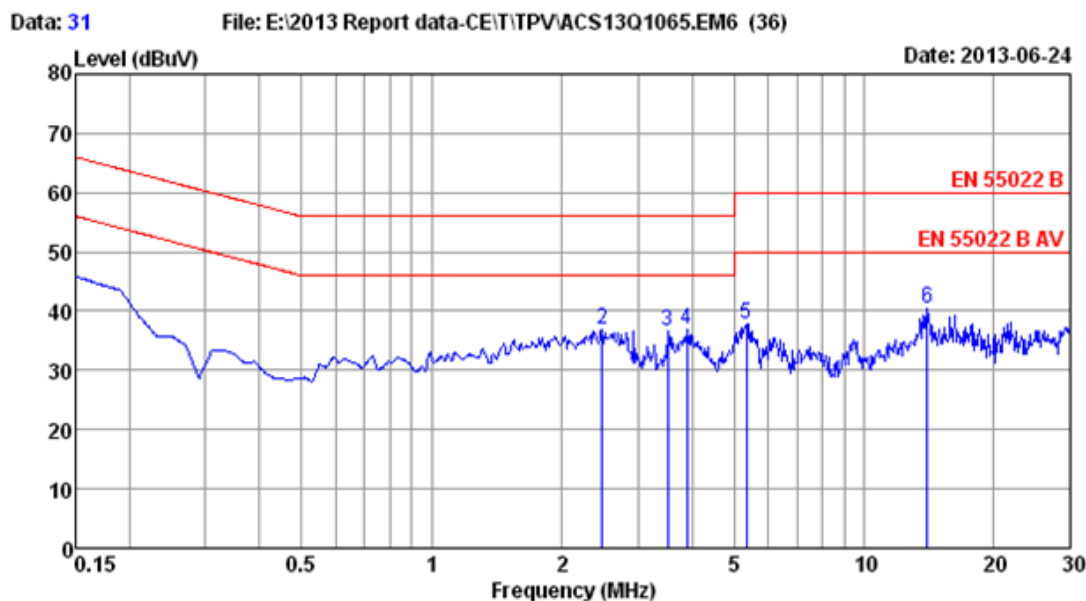

Site no :2# CE Data No :31
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :DVD Playing
 HDMI:1080P
 Line:1.8m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1500	9.76	9.95	26.18	45.89	66.00	20.11	QP
2	2.4736	9.85	9.99	17.07	36.91	56.00	19.09	QP
3	3.5092	9.87	10.01	16.69	36.57	56.00	19.43	QP
4	3.9014	9.88	10.01	16.99	36.88	56.00	19.12	QP
5	5.3332	9.90	10.03	17.87	37.80	60.00	22.20	QP
6	13.9886	10.03	10.12	20.37	40.52	60.00	19.48	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

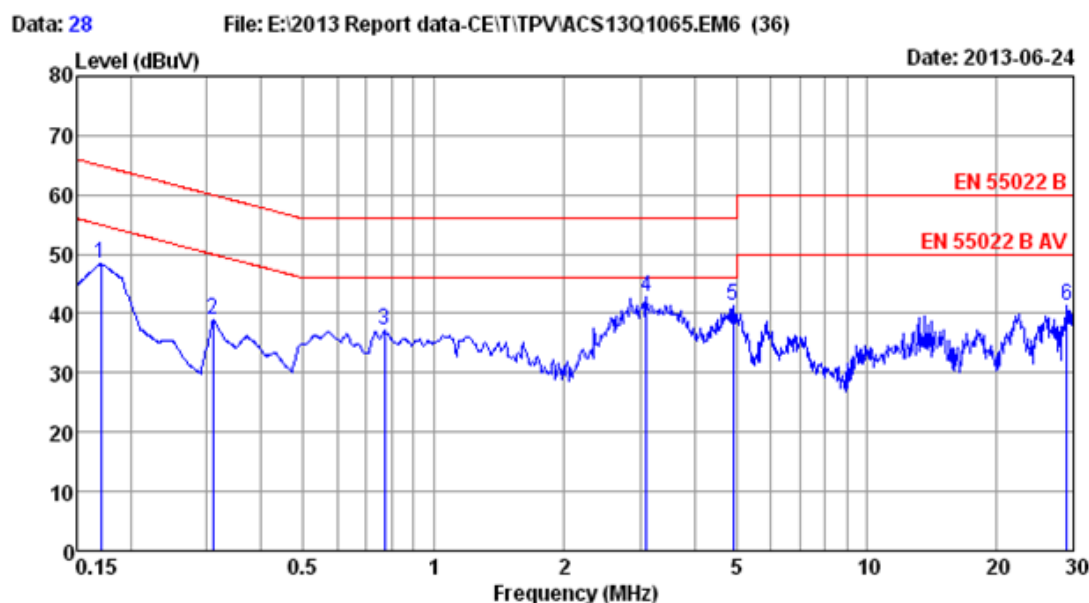

Site no :2# CE Data No :28
 Dis./Lisn :13 ENV4200 L1 LISN phase:LINE
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1920*1080@60Hz
 Line:1.5m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1703	9.91	9.96	28.60	48.47	64.94	16.47	QP
2	0.3100	9.93	9.96	19.08	38.97	59.97	21.00	QP
3	0.7711	9.96	9.97	17.17	37.10	56.00	18.90	QP
4	3.1066	10.03	10.00	22.69	42.72	56.00	13.28	QP
5	4.9257	10.04	10.03	21.20	41.27	56.00	14.73	QP
6	28.9077	10.13	10.26	20.81	41.20	60.00	18.80	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

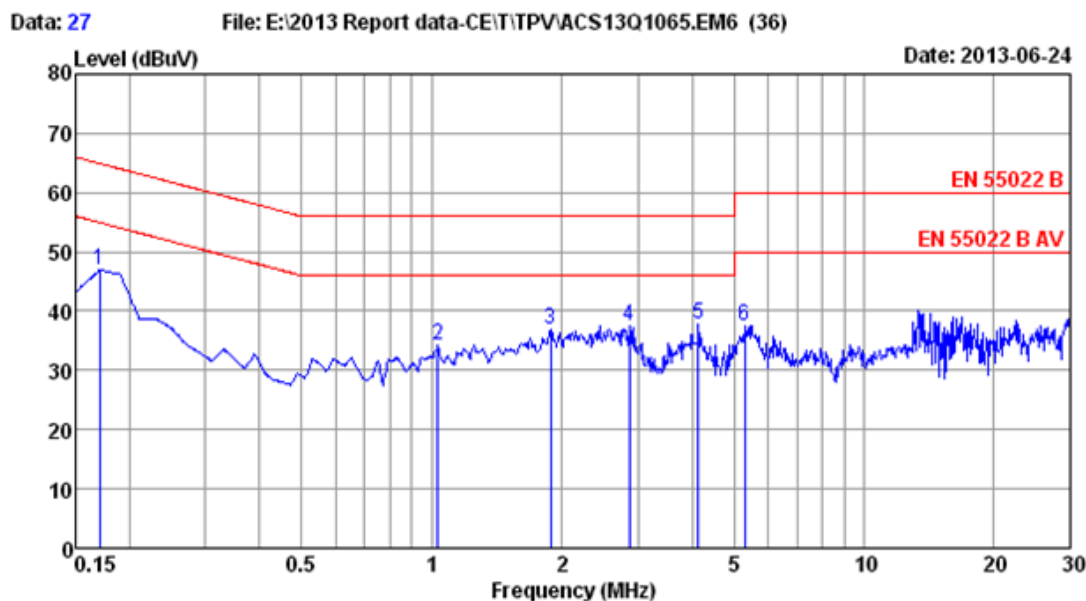

Site no :2# CE Data No :27
 Dis./Lisn :13 ENV4200 N LISN phase:NEUTRAL
 Limit :EN 55022 B
 Env./Ins. :23.1°C/53% Engineer :Berg_Guo
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H" Pattern And 1kHz Playing
 VGA:1920*1080@60Hz
 Line:1.5m

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.1703	9.78	9.96	27.22	46.96	64.94	17.98	QP
2	1.0320	9.83	9.97	14.49	34.29	56.00	21.71	QP
3	1.8879	9.84	9.98	16.95	36.77	56.00	19.23	QP
4	2.8692	9.86	10.00	17.69	37.55	56.00	18.45	QP
5	4.1356	9.88	10.02	17.92	37.82	56.00	18.18	QP
6	5.3050	9.90	10.03	17.61	37.54	60.00	22.46	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED DISTURBANCE MEASUREMENT

4.1. Test Equipments

4.1.1. For frequency range 30MHz~1000MHz (At 10m Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	10m Chamber	AUDIX	N/A	N/A	Nov.25,12	1 Year
2	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Oct.31, 12	1 Year
3	Test Receiver	Rohde & Schwarz	ESCI	100843	Oct.31, 12	1 Year
4	Amplifier	Agilent	8447D	2944A10684	May.08, 13	1 Year
5	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-493	Mar.14, 13	1 Year
6	RF Cable	MIYAZAKI	CFD400-NL	10m Chamber No.1	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 13	1 Year
8	Coaxial Switch	Anritsu	MP59B	6200766905	May.08, 13	1 Year

4.1.2. For frequency range 1GHz~6GHz (At 3m Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 13	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	Aug.28, 13	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 13	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 13	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 13	1 Year

4.2. Block Diagram of Test Setup

4.2.1. In Anechoic Chamber Test Setup Diagram for 30MHz~1000MHz

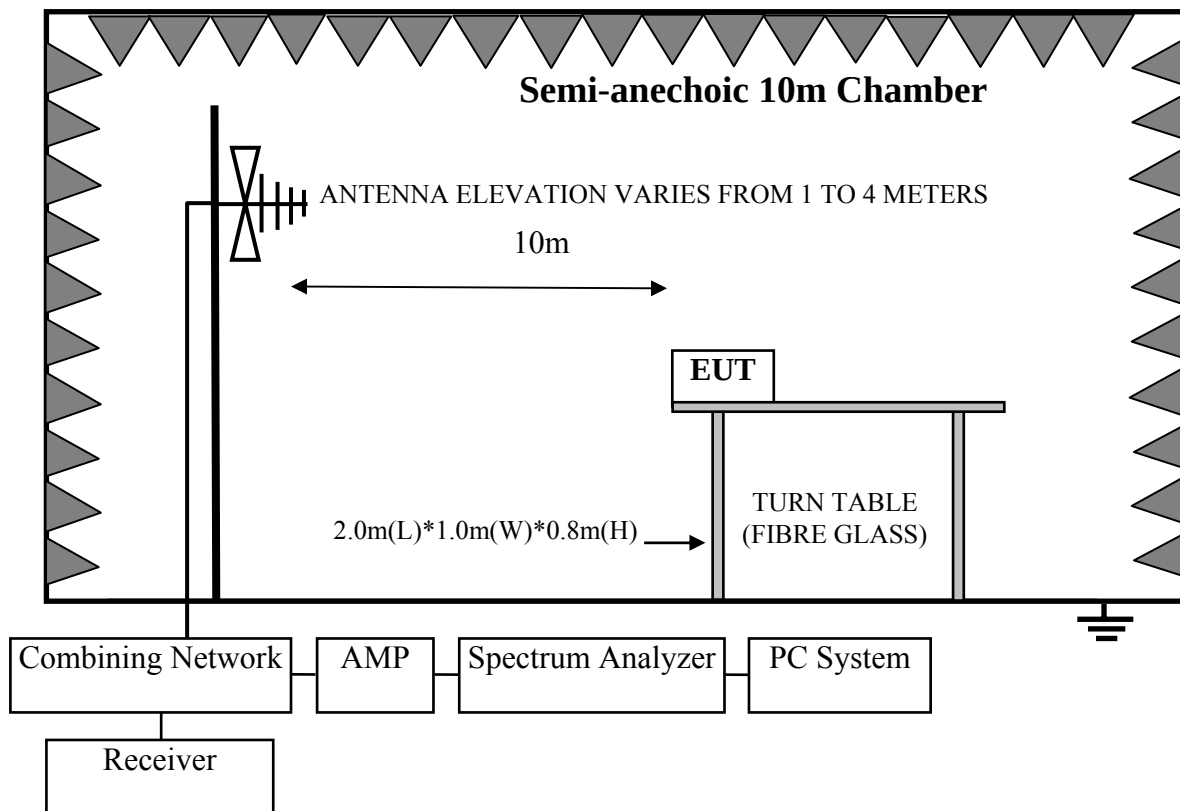

4.2.2. In Anechoic (3m) Chamber Test Setup Diagram for 1-6GHz

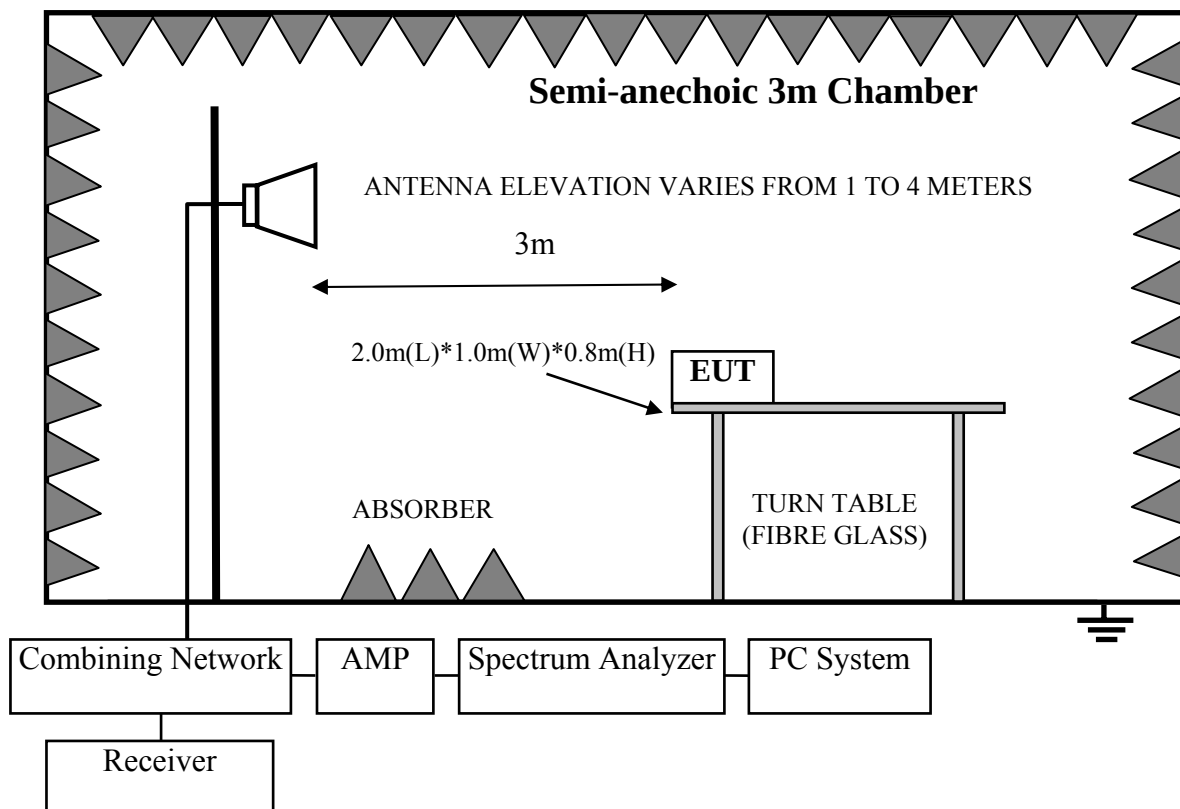

4.3. Test Standard

EN55022: 2010+AC:2011, Class B

4.4. Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	10	30
230 ~ 1000	10	37
1000~3000	3	70(Peak) 50(Average)
3000~6000	3	74(Peak) 54(Average)

- Note:
- (1) Emission level = Antenna Factor + Cable Loss + Reading
Emission level = Antenna Factor - Amp Factor + Cable Loss + Reading (above 1000MHz)
 - (2) The lower limit shall apply at the transition frequencies.
 - (3) Distance refers to the distance in meters between the test instrument antenna and the closed point of any part of the E.U.T..

4.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.7. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m & 10m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all the interface cables were changed according to EN 55022 Class B on Radiated Disturbance test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESCI) is 120 kHz.

The resolution bandwidth of the Agilent Spectrum Analyzer E4407B was set at 1MHz. (For above 1GHz)

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values.

The frequency range from 1GHz to 6GHz was checked and all final readings of measurement were with Peak and Average detector, measurement distance was 3m at semi-anechoic chamber. The portion of the test volume that was obstructed by absorber placed on the floor (30cm maximum).

Finally, selected operating situations at Anechoic Chamber measurement, all the test results are listed in section 4.8.

4.8. Radiated Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

EUT: LCD Monitor Model No. : L270UL

The EUT with the following test modes were tested and selected (No.3 ~9) to read Q.P values, all the test results are listed in next pages.

Test Date: Jun.26~28, 2013 Temperature: 24℃ Humidity: 56%

No.	Cable Length	Input Port	Resolution & Frequency	Reference Test Data No.	
				Horizontal	Vertical
1.	1.8m	VGA	640*480/60Hz	#8	#7
2.			1280*1024/75Hz	#6	#5
3. ✖			1920*1080/60Hz	#2	#1
4.		DVI	1920*1080/60Hz	#12	#11
5.		Display	1920*1080/60Hz	#18	#17
6.		HDMI	1920*1080/60Hz	#14	#13
7.		HDMI:1080p(DVD Playing)		#16	#15
8.		VGA (Panel is Vertical)	1080*1920/60Hz	#10	#9
9.	1.5m	VGA	1920*1080/60Hz	#4	#3

(✖ Worst test mode)


For frequency range 1GHz~6GHz

The EUT with below test mode were measured within Anechoic Chamber and the test results listed in next pages


Test Date: Jun.23, 2013 Temperature: 22.5℃ Humidity: 38%

The EUT was pre-tested under following test modes, and test mode 1 was the worst cases for final test.


No.	Cable Length	Input Port	Resolution & Frequency	Reference Test Data No.	
				Horizontal	Vertical
1.	1.8m	VGA	1920*1080/60Hz	#1	#2
2.		DVI	1920*1080/60Hz	#3	#4
3.		HDMI	1920*1080/60Hz	#5	#6
4.		Display	1920*1080/60Hz	#8	#7

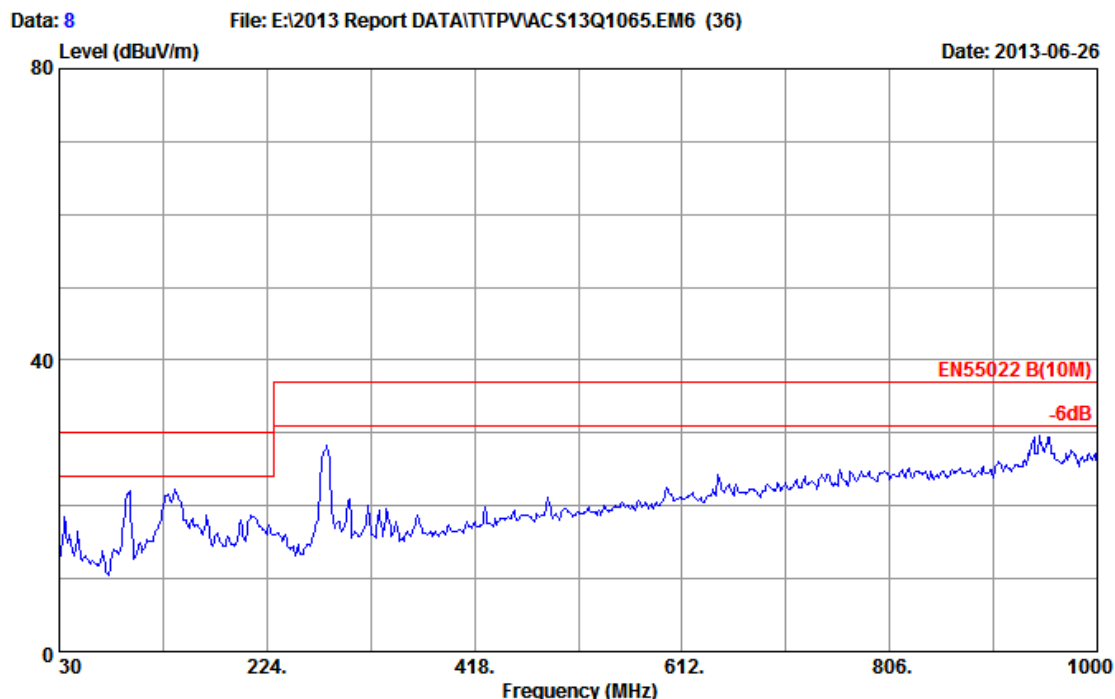


Site no :10M Data No :8
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:640*480@60Hz
 Line:1.8m

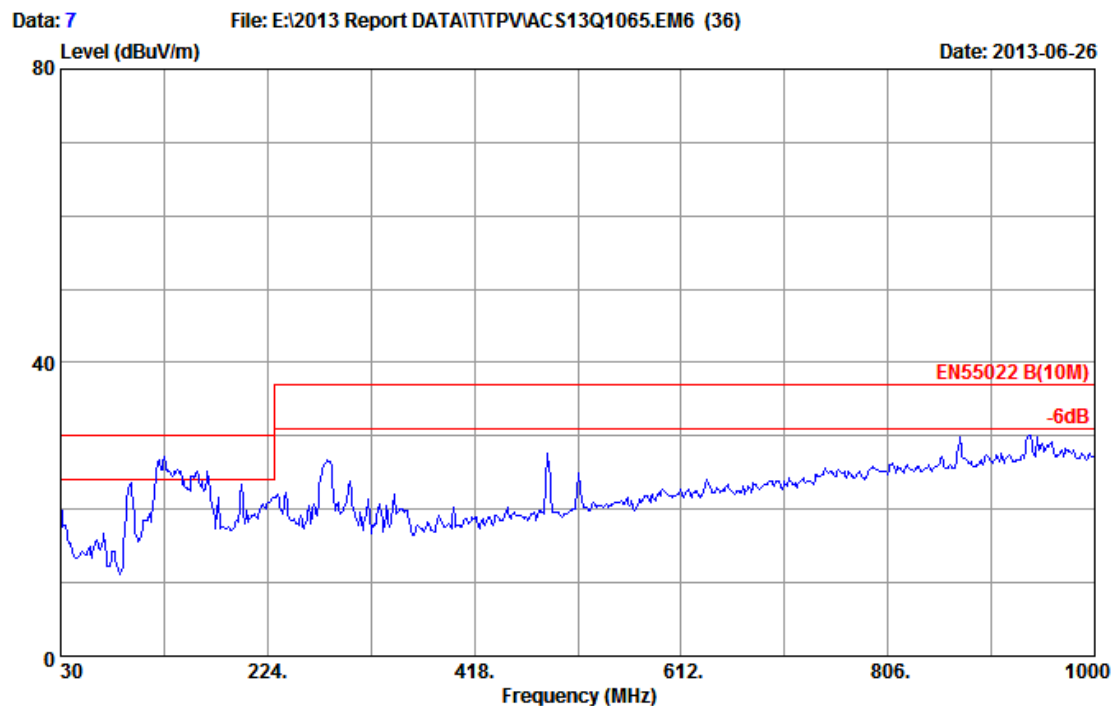


Site no :10M Data No :7
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:640*480@60Hz
 Line:1.8m

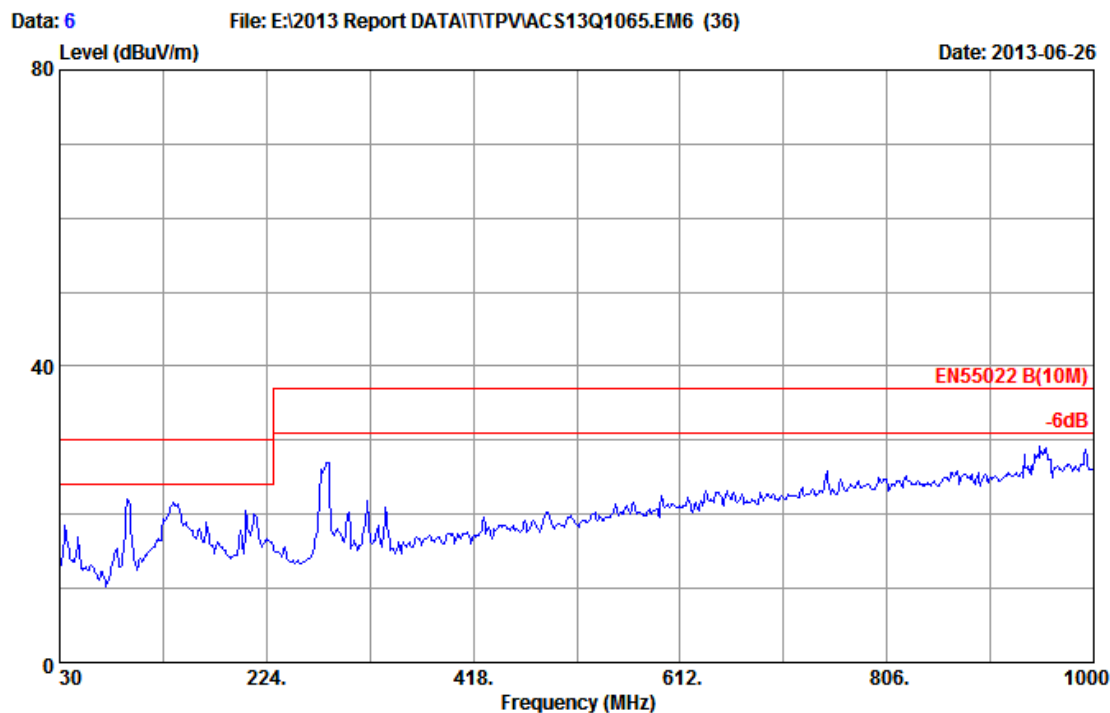

Site no :10M Data No :6
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1280*1024@75Hz
 Line:1.8m

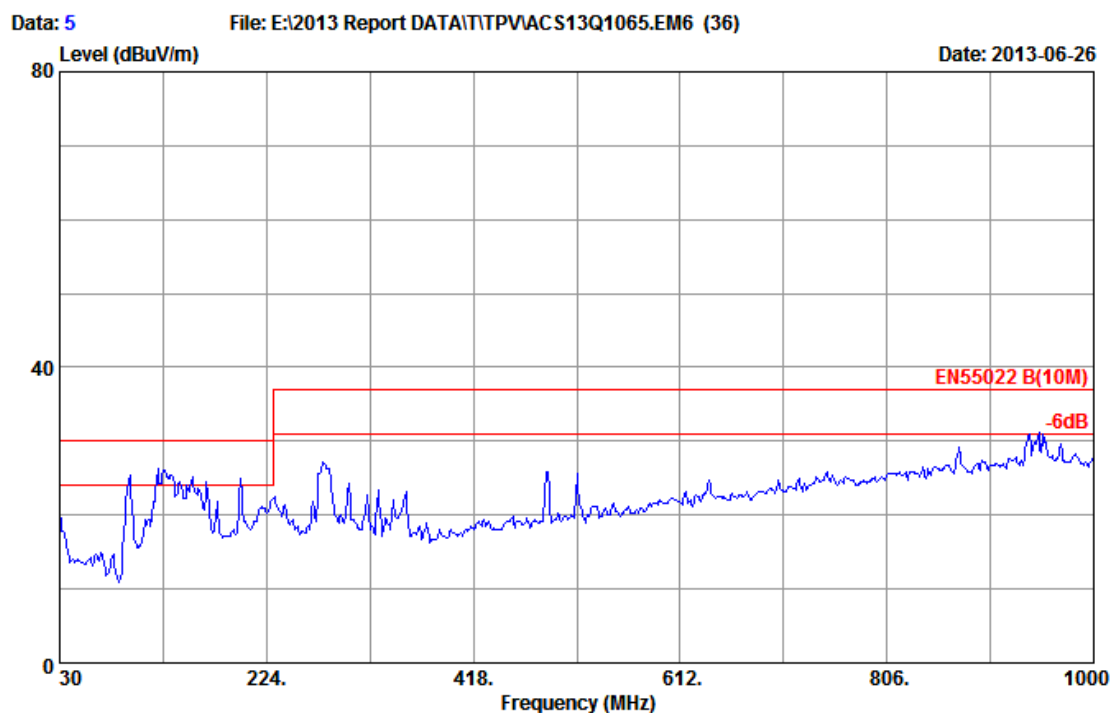


Site no :10M Data No :5
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1280*1024@75Hz
 Line:1.8m

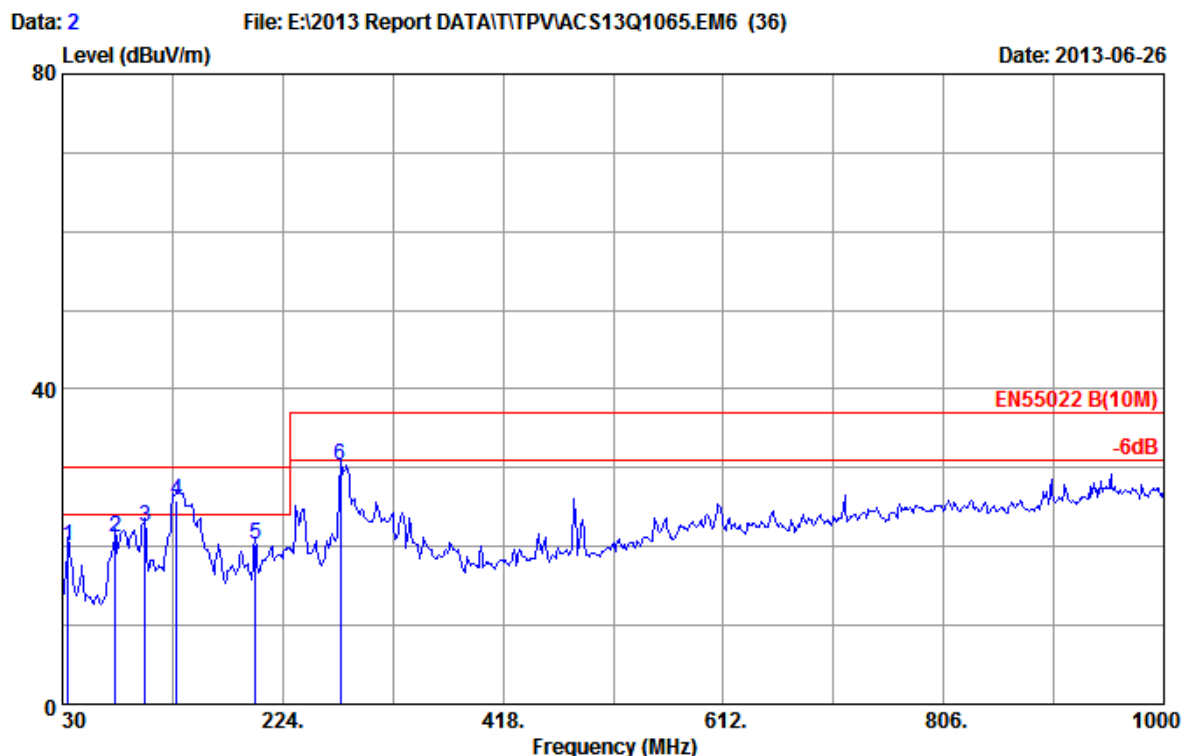

Site no :10M Data No :2
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.63	0.59	6.91	20.13	30.00	9.87	QP
2	76.560	9.07	0.84	11.32	21.23	30.00	8.77	QP
3	102.750	9.66	0.97	11.90	22.53	30.00	7.47	QP
4	130.285	12.05	1.07	12.80	25.92	30.00	4.08	QP
5	199.750	9.31	1.33	9.63	20.27	30.00	9.73	QP
6	274.440	11.99	1.61	16.63	30.23	37.00	6.77	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official limit are not reported
 3. The worst emission was detected at 130.285MHz with corrected signal level of 25.92dBuV/m (Limit is 30.00dBuV/m) when the antenna was at horizontal polarization and at 2.0m high and the turn table was at 224°.
 4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

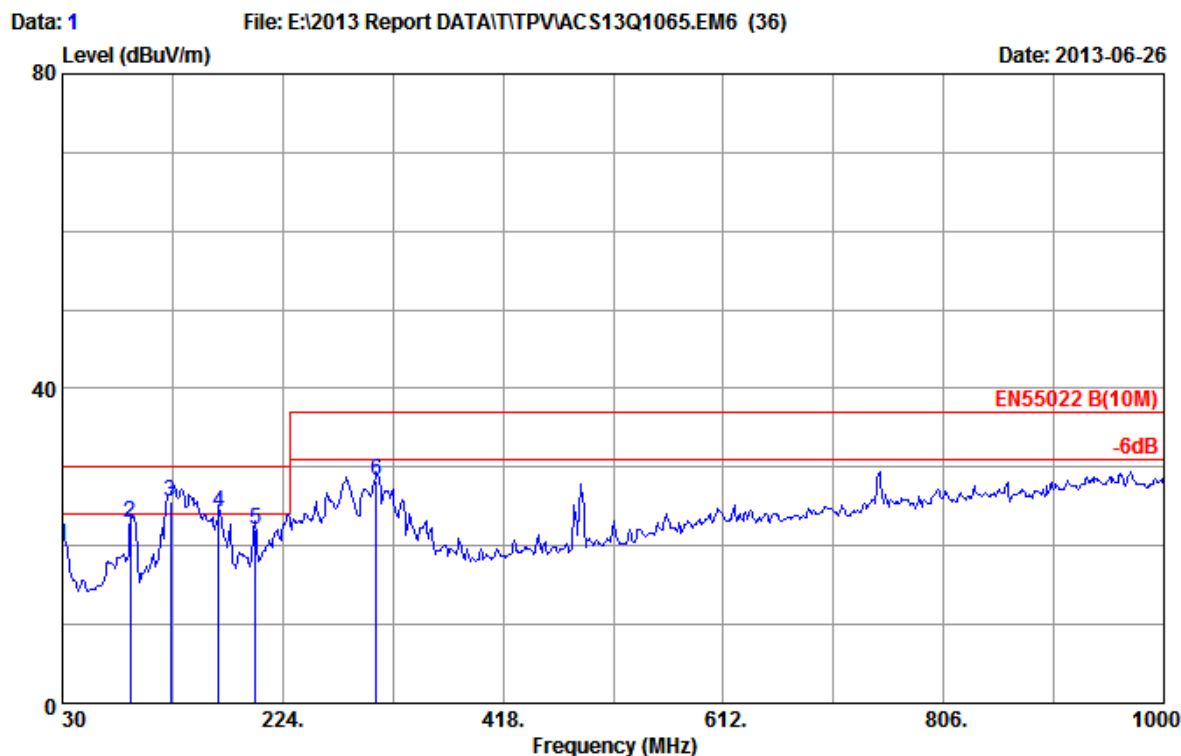

Site no :10M Data No :1
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	12.90	0.56	6.61	20.07	30.00	9.93	QP
2	90.140	7.61	0.91	14.49	23.01	30.00	6.99	QP
3	125.407	11.68	1.05	12.99	25.72	30.00	4.28	QP
4	167.740	12.91	1.21	10.16	24.28	30.00	5.72	QP
5	199.750	10.01	1.33	10.79	22.13	30.00	7.87	QP
6	306.450	13.53	1.72	13.12	28.37	37.00	8.63	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official limit are not reported
 3. The worst emission was detected at 125.407MHz with corrected signal level of 25.72dBuV/m (Limit is 30.00dBuV/m) when the antenna was at vertical polarization and at 1.0m high and the turn table was at 48°.
 4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

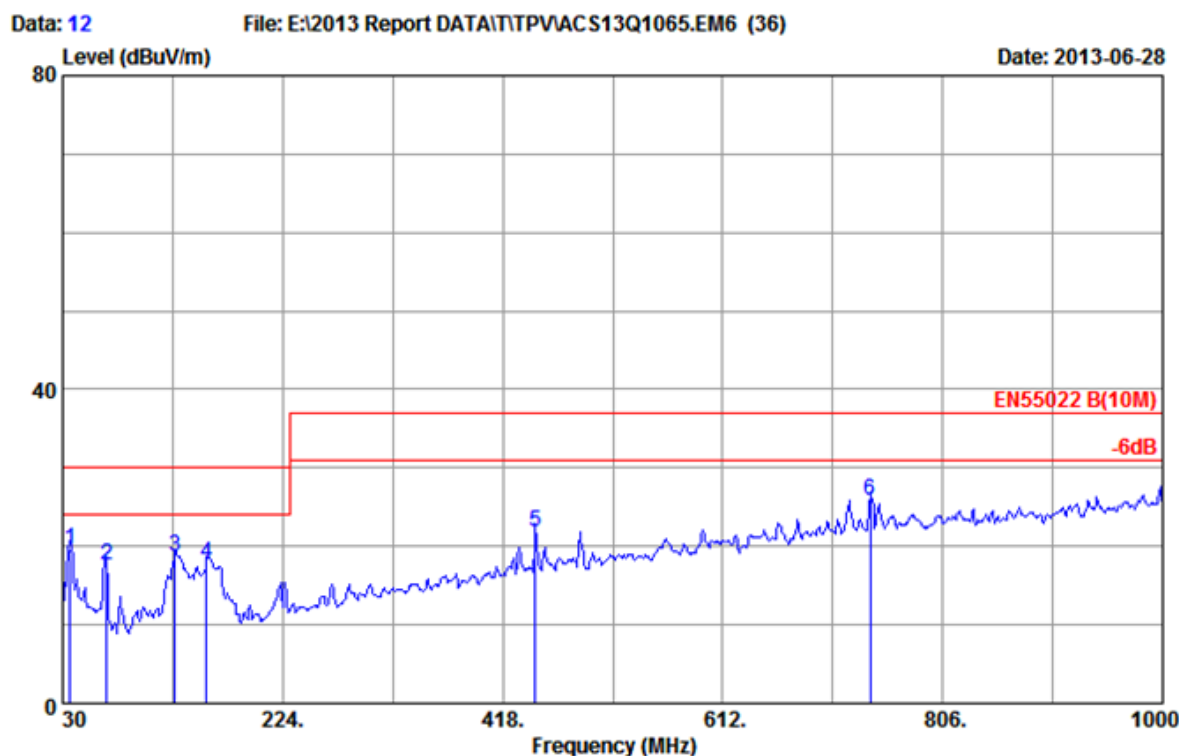

Site no :10M Data No :12
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	36.790	12.88	0.61	6.20	19.69	30.00	10.31	QP
2	68.800	10.30	0.80	6.58	17.68	30.00	12.32	QP
3	128.940	11.97	1.07	5.59	18.63	30.00	11.37	QP
4	157.070	13.40	1.17	3.25	17.82	30.00	12.18	QP
5	447.100	16.11	2.12	3.63	21.86	37.00	15.14	QP
6	741.980	20.67	2.94	2.35	25.96	37.00	11.04	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

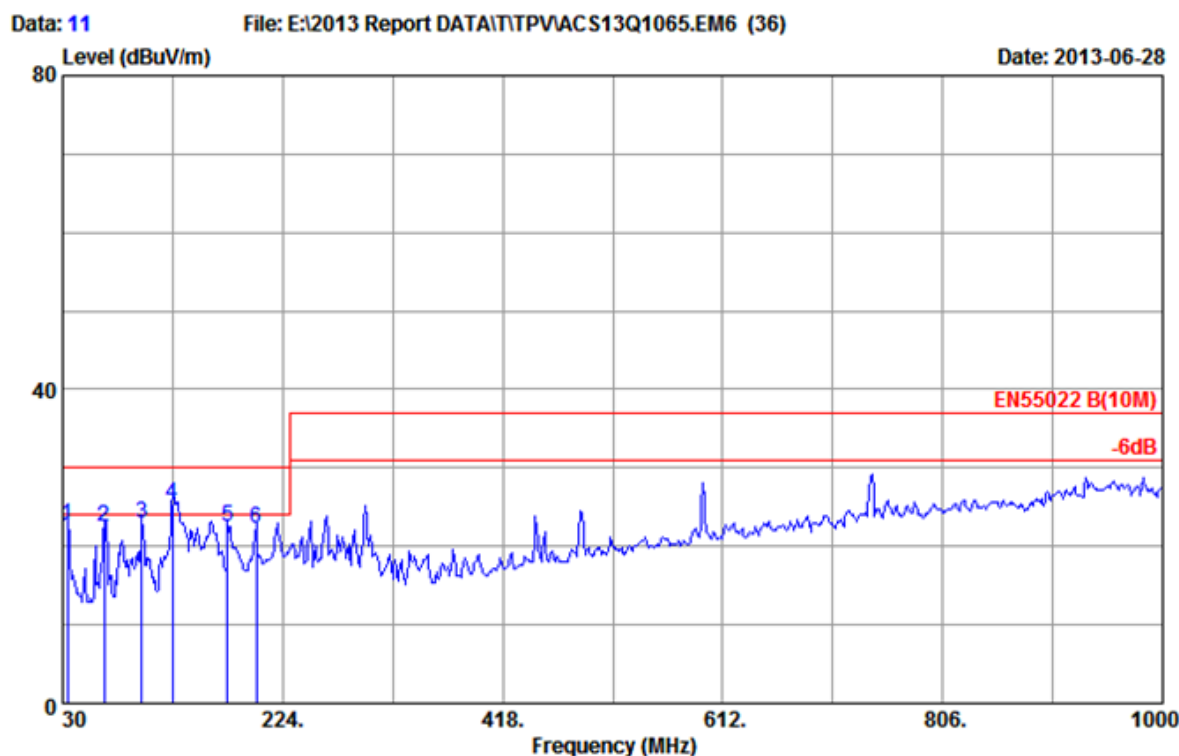

Site no :10M Data No :11
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	33.880	12.38	0.59	9.70	22.67	30.00	7.33	QP
2	66.860	12.41	0.79	9.31	22.51	30.00	7.49	QP
3	99.840	8.78	0.96	13.32	23.06	30.00	6.94	QP
4	127.000	11.85	1.06	12.61	25.52	30.00	4.48	QP
5	175.500	12.25	1.24	8.91	22.40	30.00	7.60	QP
6	200.720	9.99	1.33	10.92	22.24	30.00	7.76	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported




No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 18

File: E:\2013 Report DATA\TPV\ACS13Q1065.EM6 (36)


Date: 2013-06-28

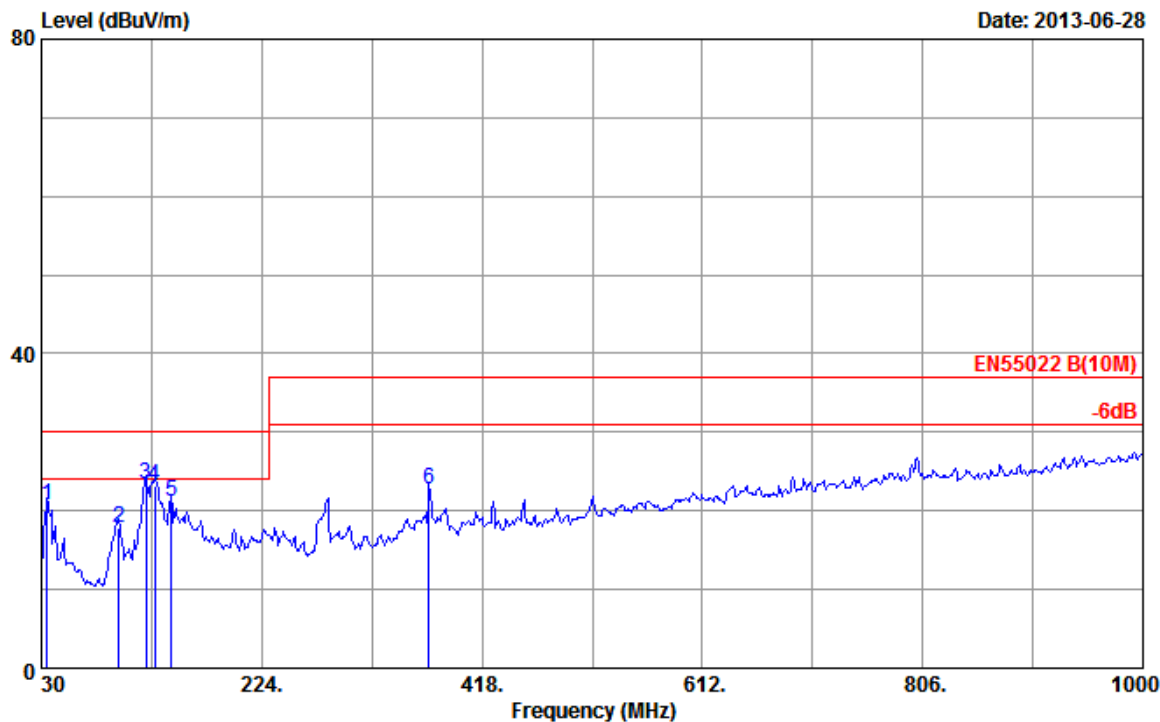

Site no :10M Data No :18
Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
Limit :EN55022 B(10M)
Env./Ins. :24°C/56% Engineer :Alex_shao
EUT :LCD Monitor M/N:L270UL
Power Rating :AC 230V/50Hz
Test Mode :Running 'H' Pattern And 1KHz Playing
Display:1920*1080@60Hz
Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.63	0.59	7.48	20.70	30.00	9.30	QP
2	97.900	9.24	0.95	7.74	17.93	30.00	12.07	QP
3	122.150	11.61	1.04	10.81	23.46	30.00	6.54	QP
4	129.910	12.03	1.07	10.13	23.23	30.00	6.77	QP
5	144.460	13.05	1.12	6.93	21.10	30.00	8.90	QP
6	371.440	14.31	1.90	6.51	22.72	37.00	14.28	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
2.The emission Levels that are 20db below the official
limit are not reported

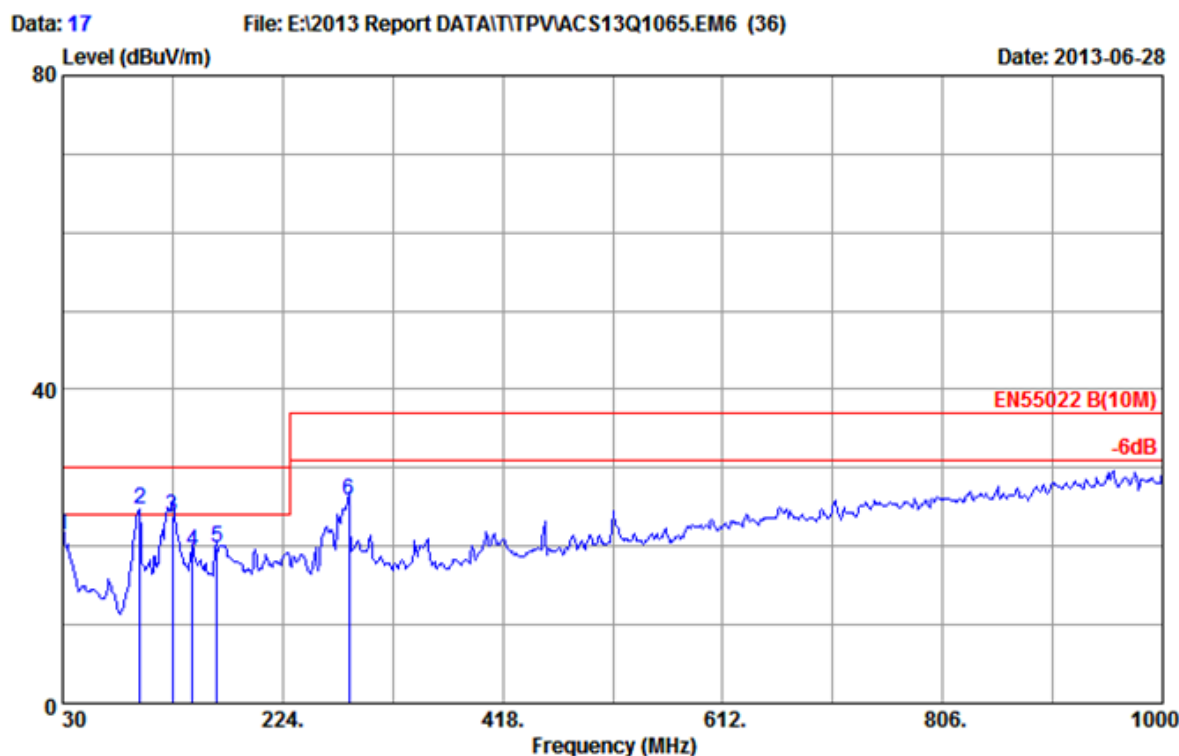

Site no :10M Data No :17
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 Display:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	12.90	0.56	7.98	21.44	30.00	8.56	QP
2	97.900	8.49	0.95	15.24	24.68	30.00	5.32	QP
3	127.000	11.85	1.06	10.94	23.85	30.00	6.15	QP
4	144.460	13.05	1.12	5.21	19.38	30.00	10.62	QP
5	165.800	13.01	1.20	5.58	19.79	30.00	10.21	QP
6	282.200	12.94	1.63	11.29	25.86	37.00	11.14	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

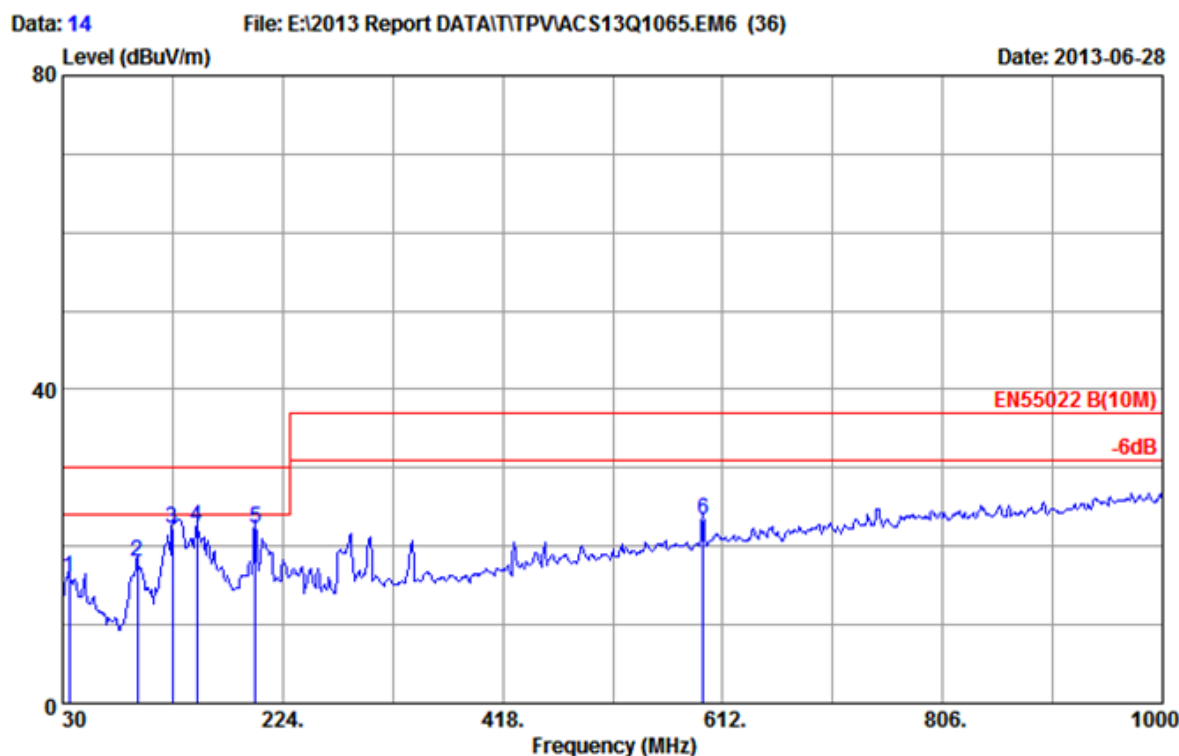

Site no :10M Data No :14
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	35.820	12.75	0.60	2.70	16.05	30.00	13.95	QP
2	95.960	9.11	0.94	7.90	17.95	30.00	12.05	QP
3	127.000	11.87	1.06	9.40	22.33	30.00	7.67	QP
4	148.340	13.30	1.14	7.98	22.42	30.00	7.58	QP
5	199.750	9.31	1.33	11.73	22.37	30.00	7.63	QP
6	594.540	18.59	2.53	2.19	23.31	37.00	13.69	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

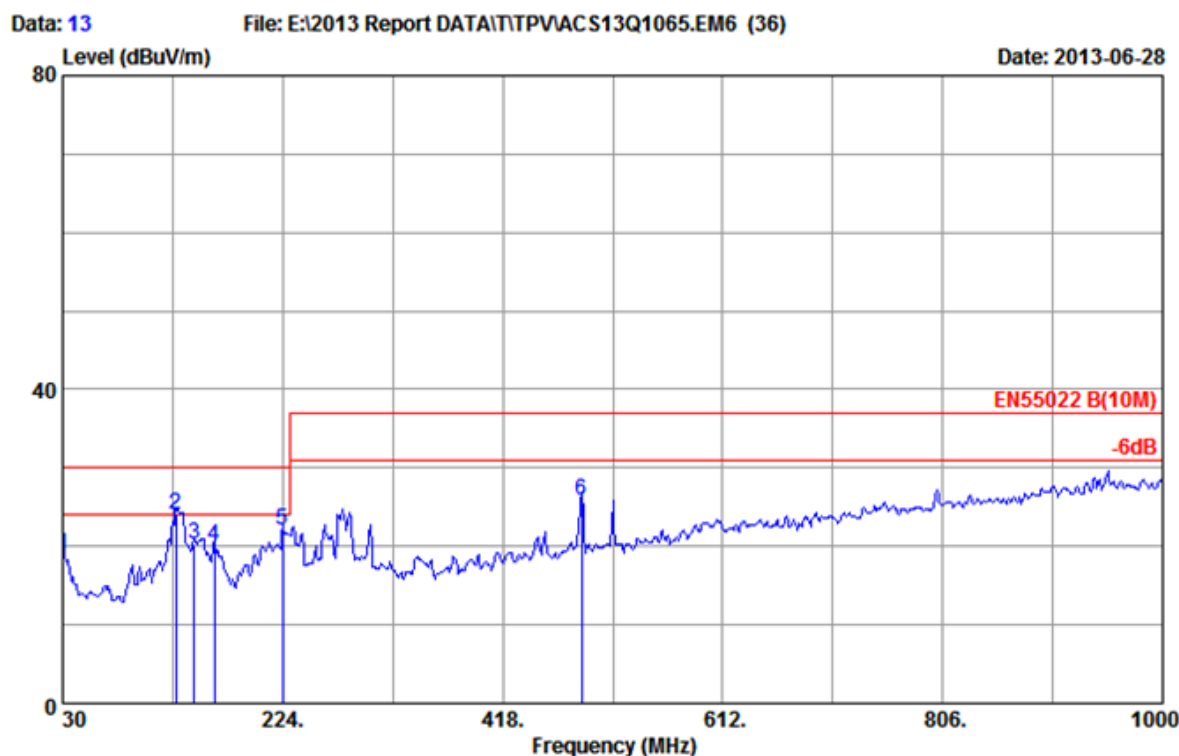

Site no :10M Data No :13
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	12.90	0.56	5.49	18.95	30.00	11.05	QP
2	129.910	12.19	1.07	10.76	24.02	30.00	5.98	QP
3	146.400	13.20	1.13	5.87	20.20	30.00	9.80	QP
4	163.860	13.11	1.20	5.66	19.97	30.00	10.03	QP
5	224.000	9.62	1.42	10.93	21.97	30.00	8.03	QP
6	487.840	17.36	2.24	6.34	25.94	37.00	11.06	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

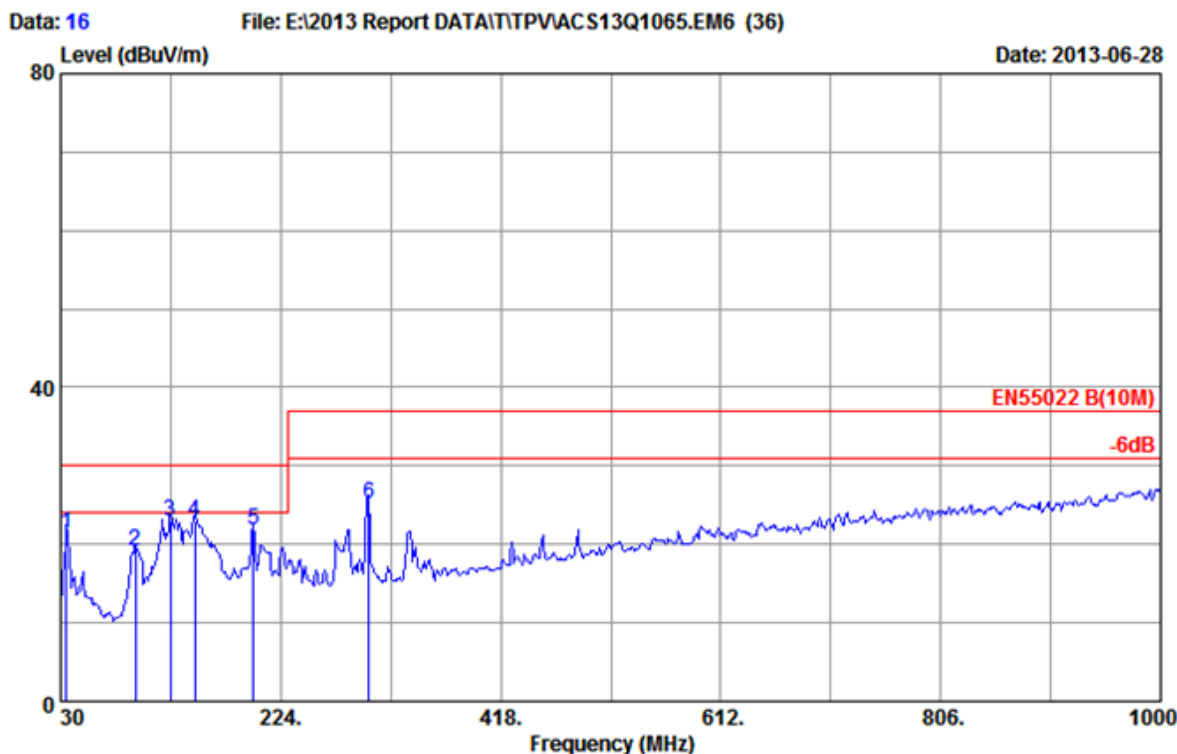

Site no :10M Data No :16
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M) Engineer :Alex_shao
 Env./Ins. :24°C/56%
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :HDMI:1080P
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.63	0.59	8.26	21.48	30.00	8.52	QP
2	95.960	9.11	0.94	9.05	19.10	30.00	10.90	QP
3	127.000	11.87	1.06	9.98	22.91	30.00	7.09	QP
4	148.340	13.30	1.14	8.59	23.03	30.00	6.97	QP
5	199.750	9.31	1.33	11.12	21.76	30.00	8.24	QP
6	301.600	12.71	1.70	10.81	25.22	37.00	11.78	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

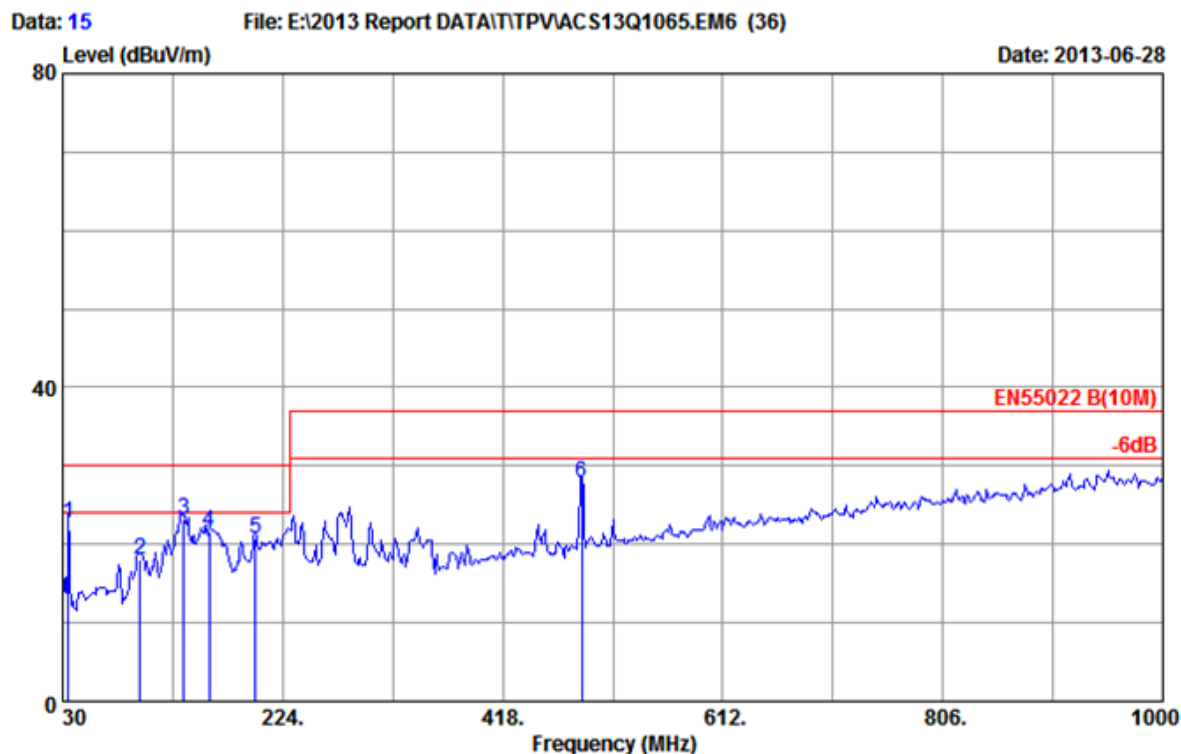

Site no :10M Data No :15
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :HDMI:1080P
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.40	0.59	9.80	22.79	30.00	7.21	QP
2	97.900	8.49	0.95	8.61	18.05	30.00	11.95	QP
3	136.700	12.57	1.10	9.49	23.16	30.00	6.84	QP
4	159.010	13.20	1.18	7.28	21.66	30.00	8.34	QP
5	199.750	10.01	1.33	9.37	20.71	30.00	9.29	QP
6	487.840	17.36	2.24	8.22	27.82	37.00	9.18	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

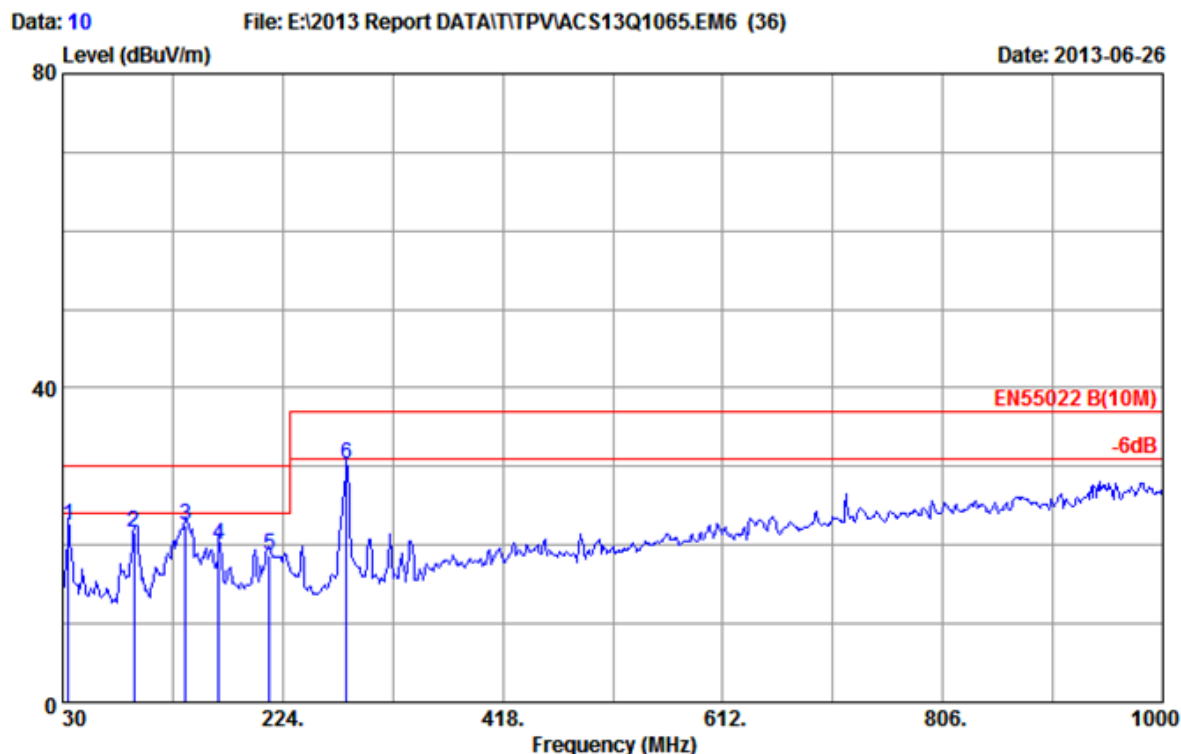

Site no :10M Data No :10
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1080*1920@60Hz
 Panel is Vertical
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.63	0.59	9.28	22.50	30.00	7.50	QP
2	93.050	8.90	0.92	11.72	21.54	30.00	8.46	QP
3	138.640	12.66	1.10	8.81	22.57	30.00	7.43	QP
4	167.740	12.64	1.21	6.21	20.06	30.00	9.94	QP
5	212.360	9.68	1.38	7.66	18.72	30.00	11.28	QP
6	280.260	12.17	1.63	16.41	30.21	37.00	6.79	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official limit are not reported

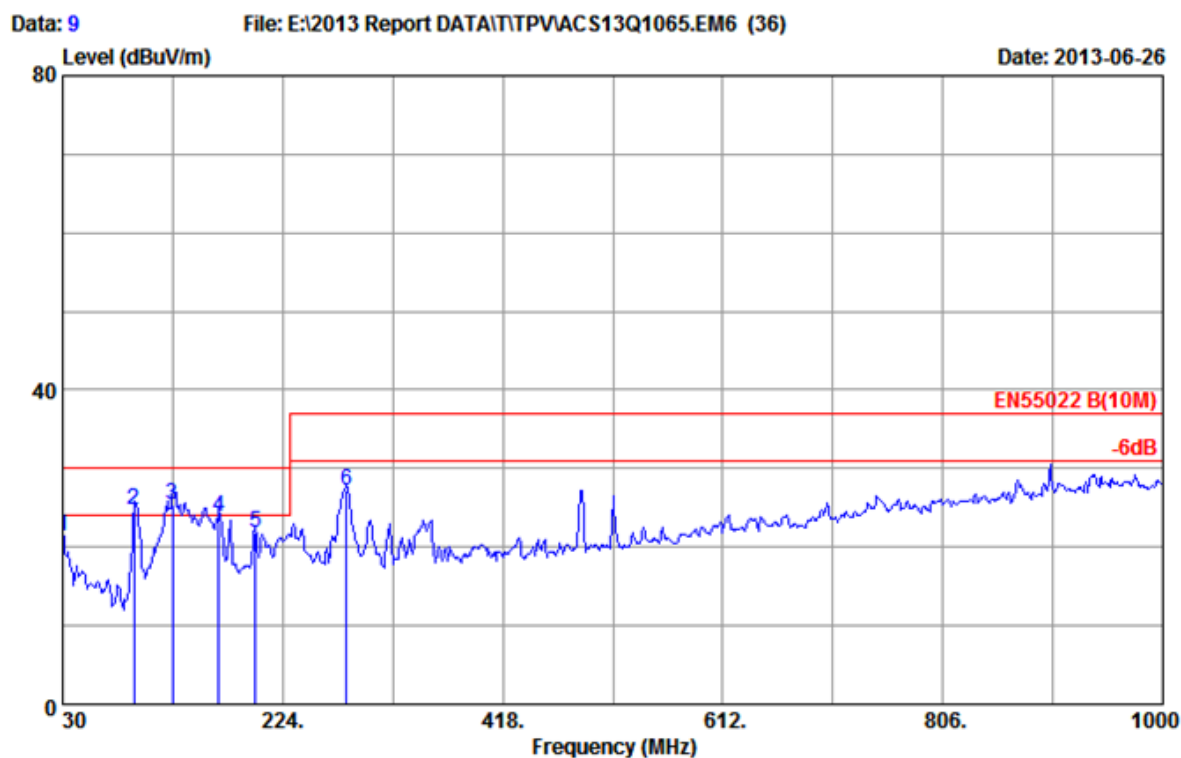

Site no :10M Data No :9
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1080*1920@60Hz
 Panel is Vertical
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	12.90	0.56	7.86	21.32	30.00	8.68	QP
2	93.050	7.86	0.92	15.97	24.75	30.00	5.25	QP
3	127.000	11.85	1.06	12.40	25.31	30.00	4.69	QP
4	167.740	12.91	1.21	9.79	23.91	30.00	6.09	QP
5	199.750	10.01	1.33	10.50	21.84	30.00	8.16	QP
6	280.260	12.91	1.63	12.63	27.17	37.00	9.83	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official limit are not reported

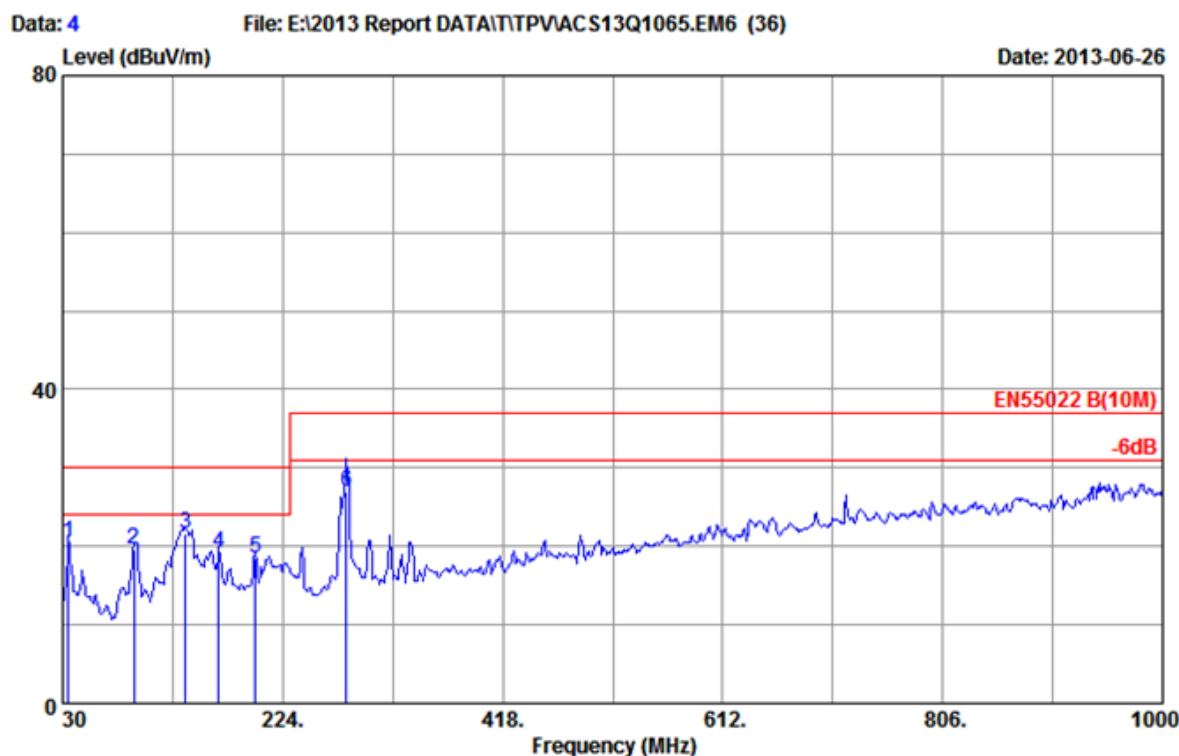

Site no :10M Data No :4
 Dis./Ant. :10m 2013 9168-429 Ant.pol :HORIZONTAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.5m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	12.63	0.59	7.28	20.50	30.00	9.50	QP
2	93.050	8.90	0.92	9.72	19.54	30.00	10.46	QP
3	138.640	12.66	1.10	7.81	21.57	30.00	8.43	QP
4	167.740	12.64	1.21	5.21	19.06	30.00	10.94	QP
5	199.750	9.31	1.33	7.84	18.48	30.00	11.52	QP
6	280.050	12.16	1.63	13.20	26.99	37.00	10.01	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

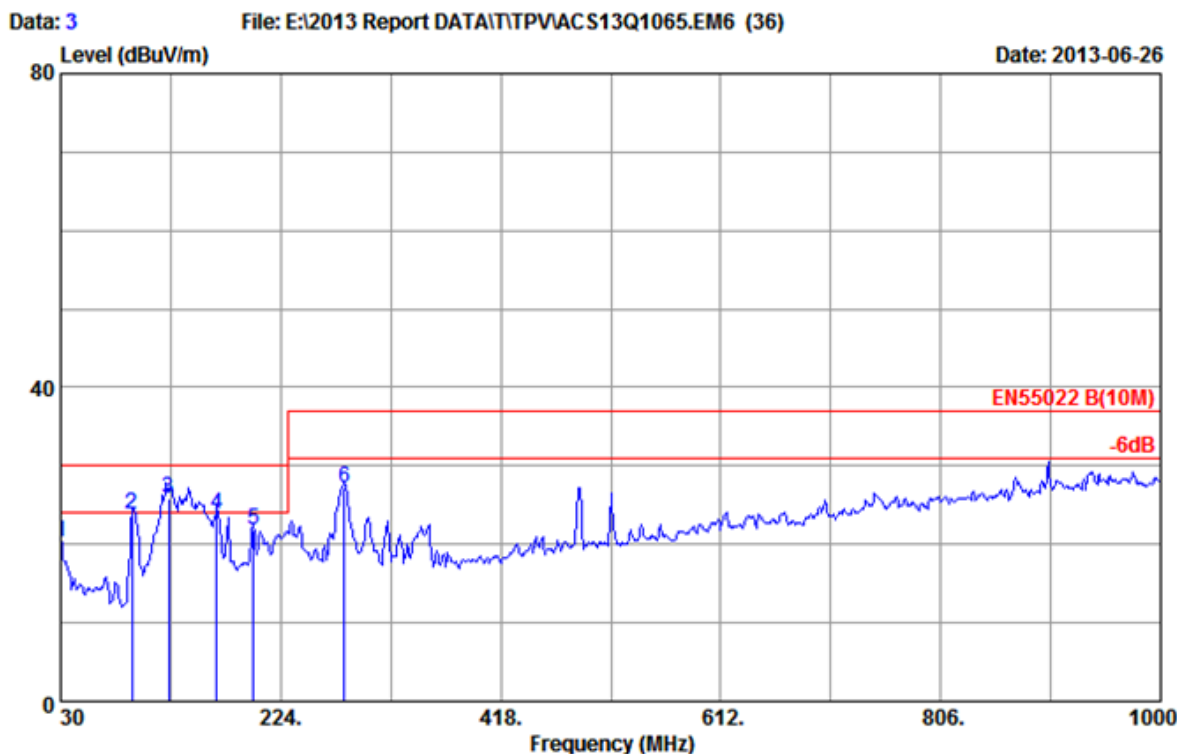

Site no :10M Data No :3
 Dis./Ant. :10m 2013 9168-493 Ant.pol :VERTICAL
 Limit :EN55022 B(10M)
 Env./Ins. :24°C/56% Engineer :Alex_shao
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.5m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	12.90	0.56	6.86	20.32	30.00	9.68	QP
2	93.050	7.86	0.92	14.97	23.75	30.00	6.25	QP
3	125.411	11.68	1.05	13.02	25.75	30.00	4.25	QP
4	167.740	12.91	1.21	9.79	23.91	30.00	6.09	QP
5	199.750	10.01	1.33	10.50	21.84	30.00	8.16	QP
6	280.260	12.91	1.63	12.63	27.17	37.00	9.83	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

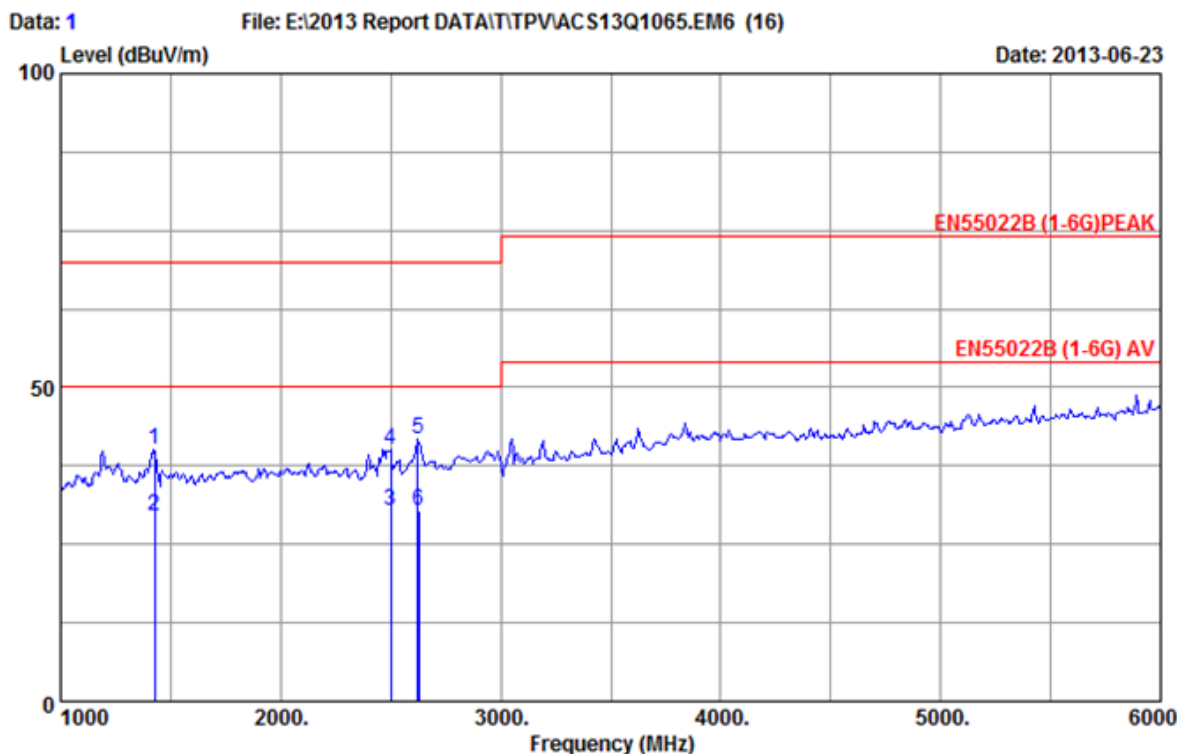

Site no :3m Chamber Data No :1
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :HORIZONTAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1425.390	23.95	1.01	34.01	49.11	40.06	70.00	29.94	Peak
2	1426.310	23.95	1.01	34.01	38.66	29.61	50.00	20.39	Average
3	2499.780	23.70	1.32	32.90	38.17	30.29	50.00	19.71	Average
4	2500.090	23.70	1.32	32.90	47.93	40.05	70.00	29.95	Peak
5	2625.250	24.33	1.34	32.77	48.88	41.78	70.00	28.22	Peak
6	2626.980	24.33	1.34	32.77	37.51	30.41	50.00	19.59	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

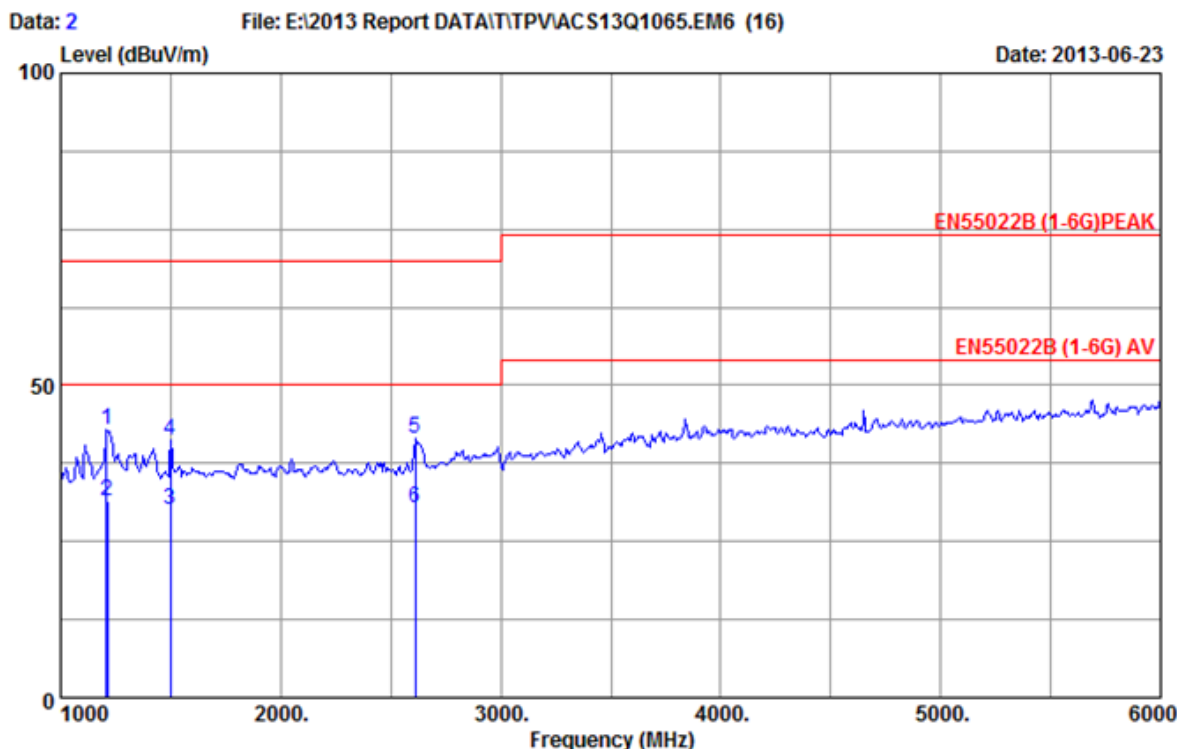

Site no :3m Chamber Data No :2
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :VERTICAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 VGA:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1210.540	23.52	0.98	34.06	52.38	42.82	70.00	27.18	Peak
2	1211.360	23.52	0.98	34.06	41.08	31.52	50.00	18.48	Average
3	1499.670	24.10	1.02	34.00	38.94	30.06	50.00	19.94	Average
4	1500.250	24.10	1.02	34.00	49.98	41.10	70.00	28.90	Peak
5	2610.910	24.25	1.34	32.79	48.63	41.43	70.00	28.57	Peak
6	2611.540	24.26	1.34	32.79	37.49	30.30	50.00	19.70	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official
 limit are not reported

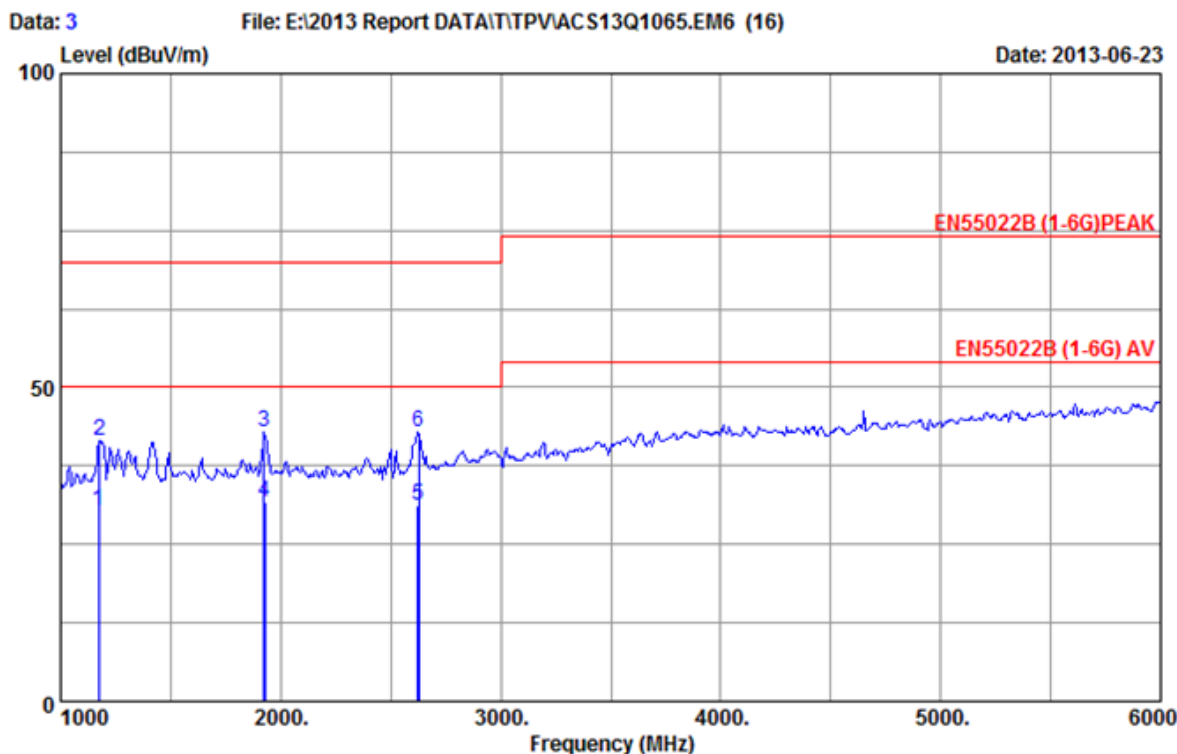

Site no :3m Chamber Data No :3
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :HORIZONTAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1174.230	23.45	0.97	34.07	40.04	30.39	50.00	19.61	Average
2	1175.330	23.45	0.97	34.06	51.23	41.59	70.00	28.41	Peak
3	1925.110	24.19	1.11	33.74	51.36	42.92	70.00	27.08	Peak
4	1926.080	24.19	1.11	33.74	40.10	31.66	50.00	18.34	Average
5	2624.120	24.32	1.34	32.78	38.26	31.14	50.00	18.86	Average
6	2625.940	24.33	1.34	32.77	49.87	42.77	70.00	27.23	Peak


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

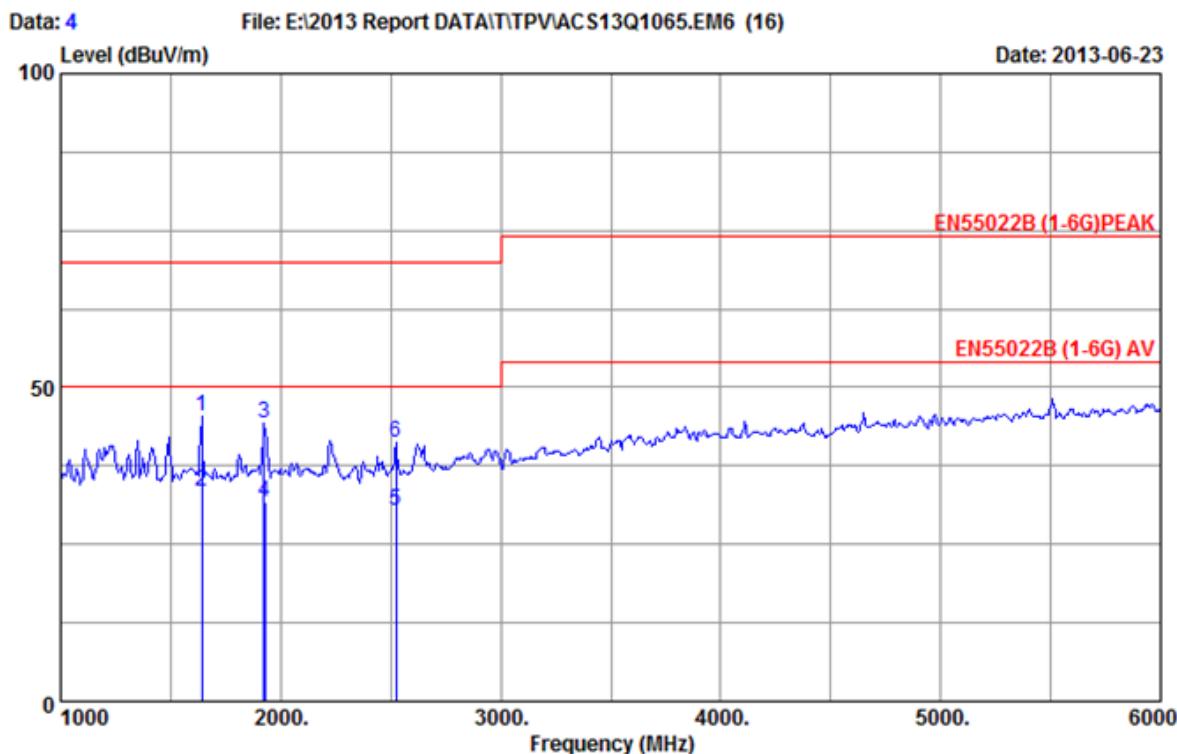

Site no :3m Chamber Data No :4
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :VERTICAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 DVI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1640.760	24.13	1.05	33.92	54.16	45.42	70.00	24.58	Peak
2	1641.360	24.13	1.05	33.92	42.30	33.56	50.00	16.44	Average
3	1925.290	24.19	1.11	33.74	52.85	44.41	70.00	25.59	Peak
4	1926.310	24.19	1.11	33.74	40.21	31.77	50.00	18.23	Average
5	2524.130	23.82	1.32	32.88	38.13	30.39	50.00	19.61	Average
6	2525.670	23.83	1.32	32.87	49.05	41.33	70.00	28.67	Peak


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

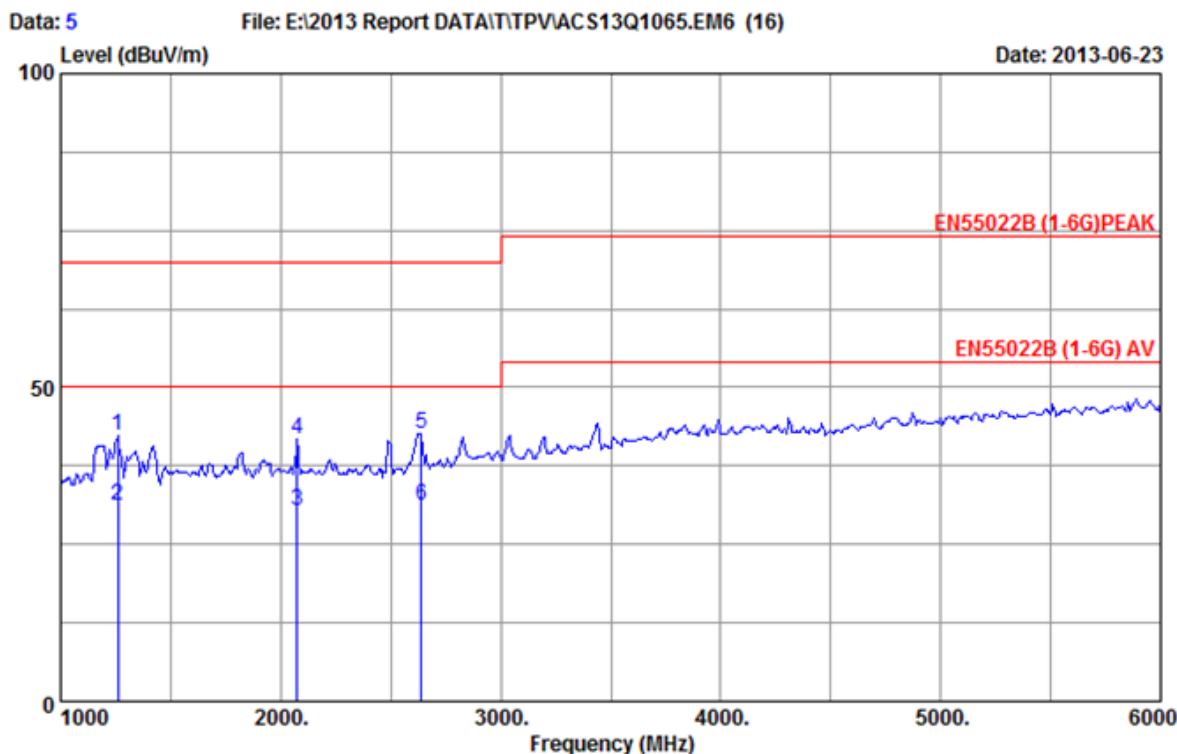

Site no :3m Chamber Data No :5
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :HORIZONTAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1260.980	23.62	0.99	34.05	51.78	42.34	70.00	27.66	Peak
2	1261.030	23.62	0.99	34.05	40.77	31.33	50.00	18.67	Average
3	2074.120	24.13	1.16	33.58	38.64	30.35	50.00	19.65	Average
4	2075.710	24.12	1.16	33.58	50.18	41.88	70.00	28.12	Peak
5	2640.260	24.40	1.34	32.76	49.77	42.75	70.00	27.25	Peak
6	2641.320	24.41	1.34	32.76	38.26	31.25	50.00	18.75	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

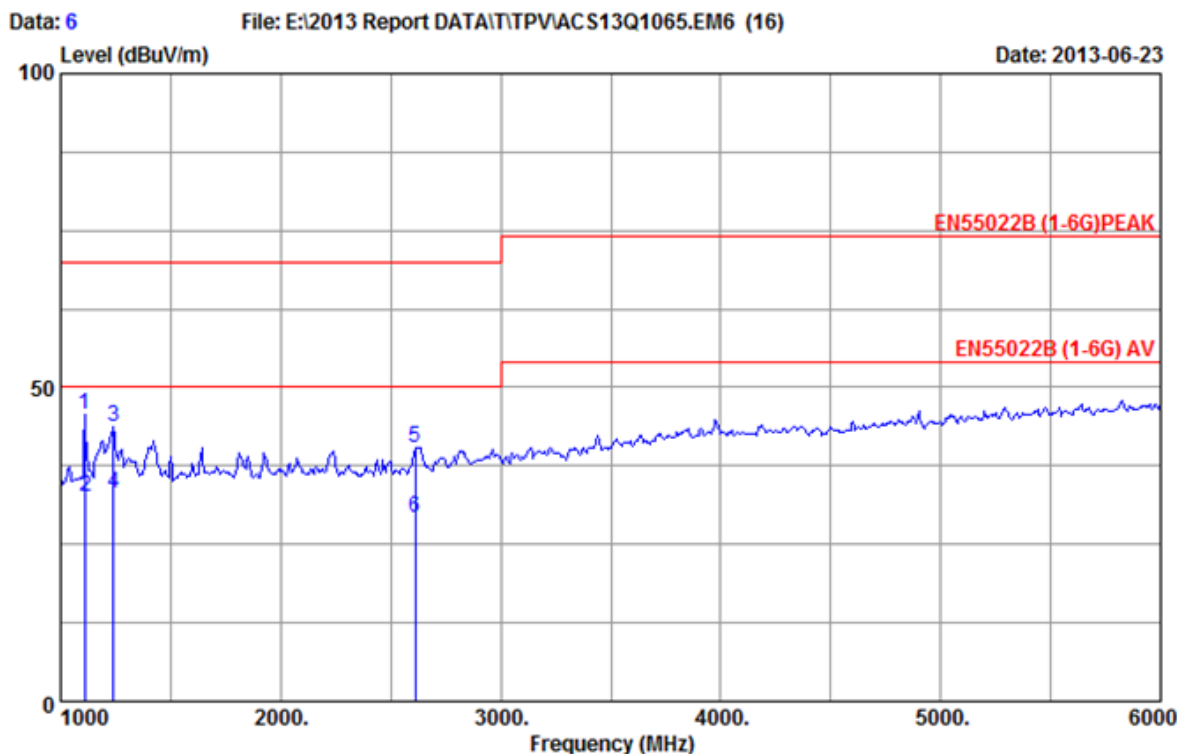

Site no :3m Chamber Data No :6
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :VERTICAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 HDMI:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1110.360	23.32	0.96	34.08	55.49	45.69	70.00	24.31	Peak
2	1111.670	23.32	0.97	34.08	42.39	32.60	50.00	17.40	Average
3	1240.790	23.58	0.98	34.05	53.36	43.87	70.00	26.13	Peak
4	1241.580	23.58	0.98	34.05	42.52	33.03	50.00	16.97	Average
5	2610.130	24.25	1.34	32.79	47.65	40.45	70.00	29.55	Peak
6	2611.080	24.26	1.34	32.79	36.53	29.34	50.00	20.66	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official
 limit are not reported

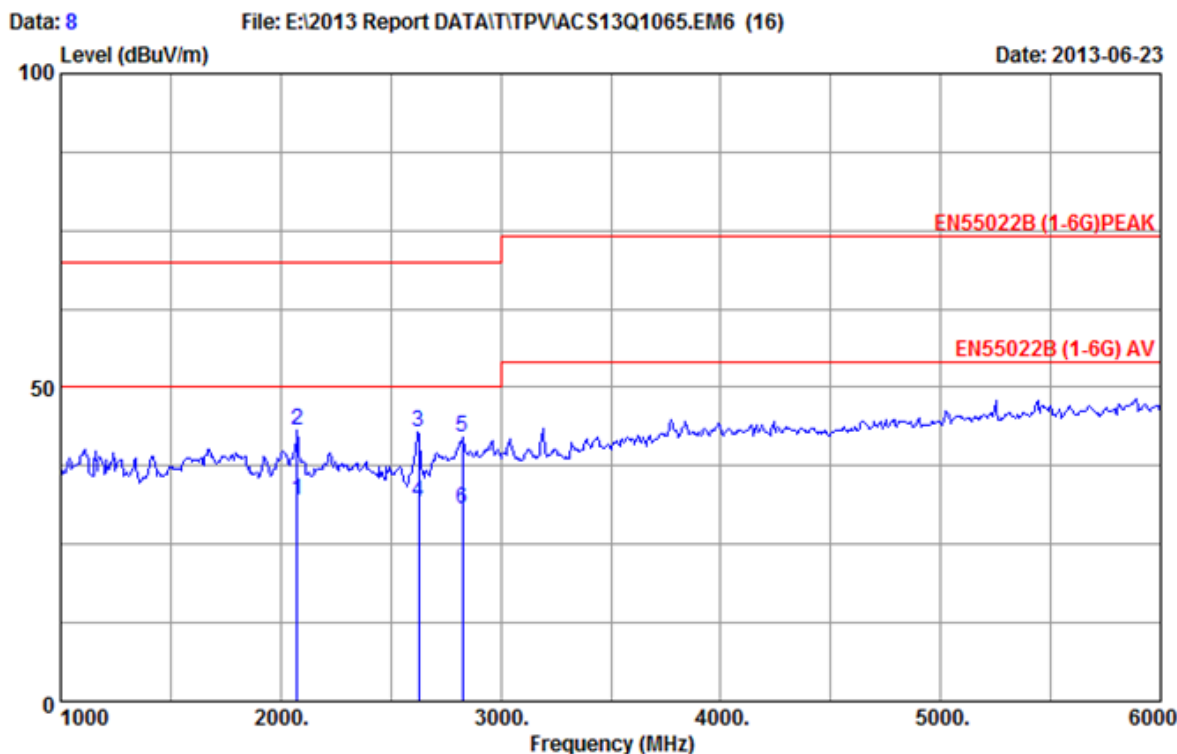

Site no :3m Chamber Data No :8
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :HORIZONTAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 Display:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2074.290	24.13	1.16	33.58	40.30	32.01	50.00	17.99	Average
2	2075.770	24.12	1.16	33.58	51.55	43.25	70.00	26.75	Peak
3	2625.960	24.33	1.34	32.77	49.89	42.79	70.00	27.21	Peak
4	2626.510	24.33	1.34	32.77	38.76	31.66	50.00	18.34	Average
5	2825.840	25.33	1.36	32.57	47.86	41.98	70.00	28.02	Peak
6	2826.360	25.33	1.36	32.57	36.62	30.74	50.00	19.26	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

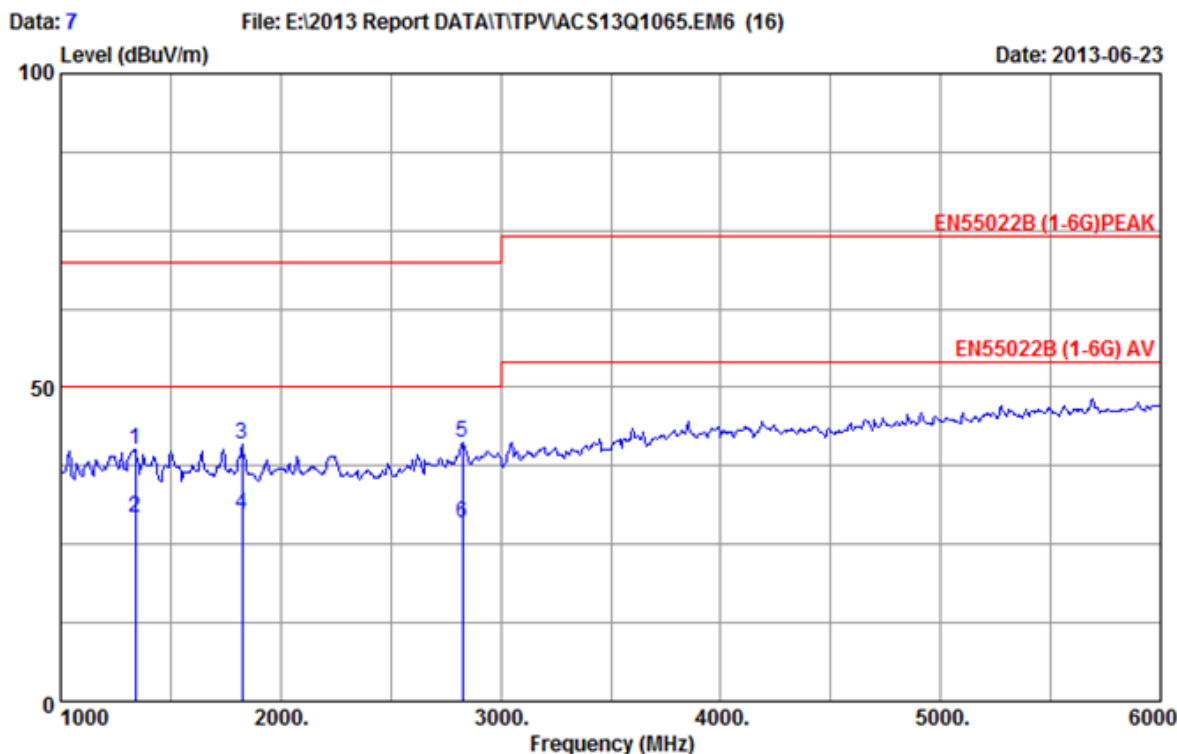

Site no :3m Chamber Data No :7
 Dis./Ant. :3m 2012 3115 (4877) Ant.pol :VERTICAL
 Limit :EN55022B (1-6G) PEAK
 Env./Ins. :22.5°C/38% Engineer :Even
 EUT :LCD Monitor M/N:L270UL
 Power Rating :AC 230V/50Hz
 Test Mode :Running "H"Pattern And 1KHz Playing
 Display:1920*1080@60Hz
 Line:1.8m

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1340.840	23.78	1.00	34.03	49.34	40.09	70.00	29.91	Peak
2	1341.260	23.78	1.00	34.03	38.36	29.11	50.00	20.89	Average
3	1825.080	24.17	1.09	33.80	49.54	41.00	70.00	29.00	Peak
4	1826.333	24.17	1.09	33.80	38.23	29.69	50.00	20.31	Average
5	2825.250	25.33	1.36	32.57	47.12	41.24	70.00	28.76	Peak
6	2826.350	25.33	1.36	32.57	34.19	28.31	50.00	21.69	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

5. HARMONIC CURRENT TEST

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Compliance Test System	California Instruments	5001ix	58481	Oct.31, 12	1 Year
2.	Compliance Test System	California Instruments	PACS-1	72627	Oct.31, 12	1 Year

5.2. Block Diagram of Test Setup

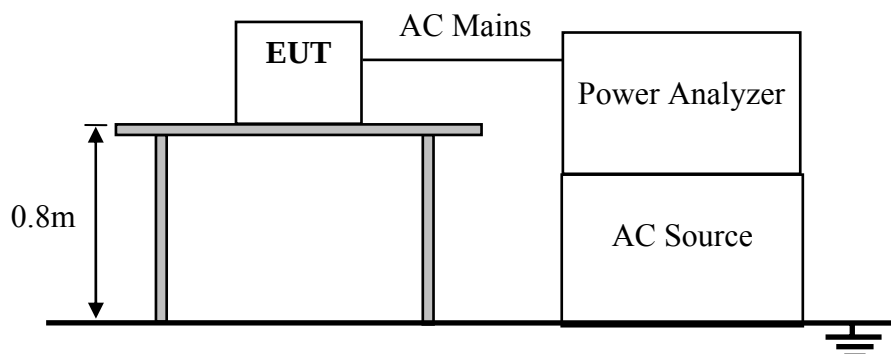

5.3. Test Standard

EN61000-3-2: 2006+A1: 2009+A2:2009; Class D

5.4. Limits of Harmonic Current

Limits for Class D Equipment		
Harmonic order (n)	Maximum permissible harmonic current per watt (mA/W)	Maximum permissible harmonic current (A)
3	3.4	0.23
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
15≤n≤39 (odd harmonic only)	3.85/n	0.15×15/n

Remark: if the EUT Power level is below 75 Watts and therefore has no defined limits.

5.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

5.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 5.2.

5.7. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.

5.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next pages.

Harmonics – Class-D per Ed. 3.2 (2009)(Run time)

EUT: LCD Monitor M/N:L270UL

Test category: Class-D per Ed. 3.2 (2009) (European limits)

Test date: 2013-6-23

Test duration (min): 2.5

Comment: Running "H" Pattern And 1KHz Playing

Customer: TPV

Tested by: John


Test Margin: 100

End time: 10:09:21

Data file name: H-000020.cts_data


Test Result: N/L Source qualification: Normal

Current & voltage waveforms

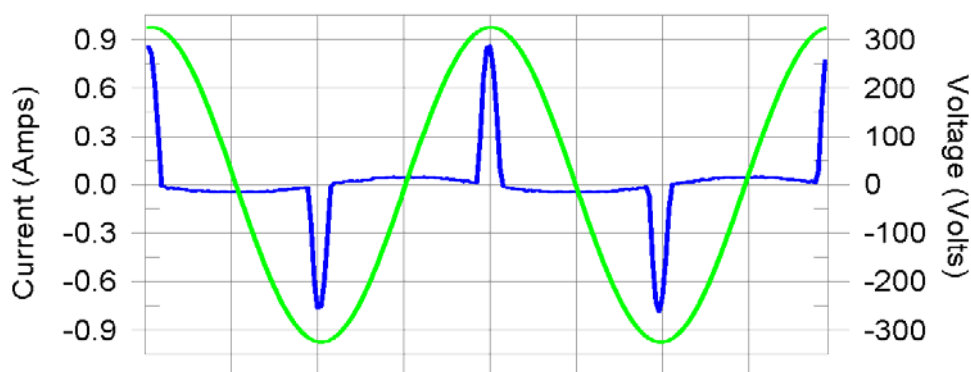

Harmonics and Class D limit line

European Limits

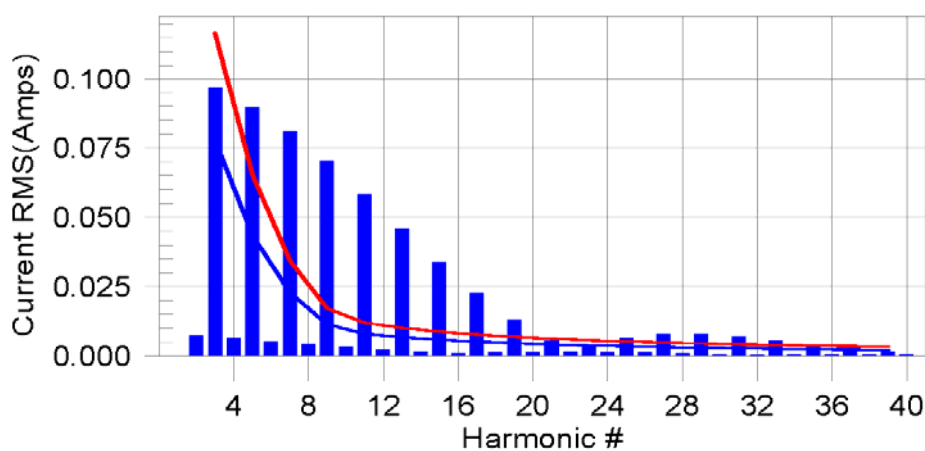

Test result: N/L Worst harmonic was #0 with 0.00% of the limit.

Current Test Result Summary (Run time)

EUT: LCD Monitor M/N:L270UL **Tested by:** John
Test category: Class-D per Ed. 3.2 (2009) (European limits) **Test Margin:** 100
Test date: 2013-6-23 **Start time:** 10:06:30 **End time:** 10:09:21
Test duration (min): 2.5 **Data file name:** H-000020.cts_data
Comment: Running "H" Pattern And 1KHz Playing
Customer: TPV

Test Result: N/L **Source qualification:** Normal
THC(A): 0.00 **I-THD(%):** 0.00 **POHC(A):** 0.000 **POHC Limit(A):** 0.000
Highest parameter values during test:
V_RMS (Volts): 230.05 **Frequency(Hz):** 50.00
I_Peak (Amps): 0.890 **I_RMS (Amps):** 0.218
I_Fund (Amps): 0.106 **Crest Factor:** 4.102
Power (Watts): 22.9 **Power Factor:** 0.462

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.007						
3	0.096	0.078	0.0	0.097	0.117	0.00	N/L
4	0.007						
5	0.089	0.043	0.0	0.090	0.065	0.00	N/L
6	0.005						
7	0.080	0.023	0.0	0.081	0.034	0.00	N/L
8	0.004						
9	0.070	0.011	0.0	0.070	0.017	0.00	N/L
10	0.003						
11	0.058	0.008	0.0	0.058	0.012	0.00	N/L
12	0.002						
13	0.045	0.007	0.0	0.046	0.010	0.00	N/L
14	0.001						
15	0.033	0.006	0.0	0.034	0.009	0.00	N/L
16	0.001						
17	0.022	0.005	0.0	0.023	0.008	0.00	N/L
18	0.001						
19	0.012	0.005	0.0	0.013	0.007	0.00	N/L
20	0.001						
21	0.005	0.004	0.0	0.005	0.006	0.00	N/L
22	0.002						
23	0.003	0.004	0.0	0.004	0.006	0.00	N/L
24	0.001						
25	0.006	0.004	0.0	0.006	0.005	0.00	N/L
26	0.001						
27	0.008	0.003	0.0	0.008	0.005	0.00	N/L
28	0.001						
29	0.008	0.003	0.0	0.008	0.005	0.00	N/L
30	0.001						
31	0.007	0.003	0.0	0.007	0.004	0.00	N/L
32	0.001						
33	0.005	0.003	0.0	0.006	0.004	0.00	N/L
34	0.001						
35	0.003	0.003	0.0	0.004	0.004	0.00	N/L
36	0.001						
37	0.001	0.002	0.0	0.002	0.004	0.00	N/L
38	0.001						
39	0.001	0.002	0.0	0.002	0.003	0.00	N/L
40	0.001						

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Source Verification Data (Run time)

EUT: LCD Monitor M/N:L270UL **Tested by:** John
Test category: Class-D per Ed. 3.2 (2009) (European limits) **Test Margin:** 100
Test date: 2013-6-23 **Start time:** 10:06:30 **End time:** 10:09:21
Test duration (min): 2.5 **Data file name:** H-000020.cts_data
Comment: Running "H" Pattern And 1KHz Playing
Customer: TPV

Test Result: N/L **Source qualification:** Normal

Highest parameter values during test:

Voltage (Vrms): 230.05	Frequency(Hz): 50.00
I_Peak (Amps): 0.890	I_RMS (Amps): 0.218
I_Fund (Amps): 0.106	Crest Factor: 4.102
Power (Watts): 22.9	Power Factor: 0.462

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.091	0.460	19.71	OK
3	0.471	2.070	22.75	OK
4	0.070	0.460	15.21	OK
5	0.036	0.920	3.90	OK
6	0.031	0.460	6.66	OK
7	0.034	0.690	4.99	OK
8	0.012	0.460	2.59	OK
9	0.041	0.460	8.84	OK
10	0.014	0.460	3.03	OK
11	0.035	0.230	15.18	OK
12	0.015	0.230	6.42	OK
13	0.038	0.230	16.60	OK
14	0.005	0.230	2.12	OK
15	0.025	0.230	10.66	OK
16	0.010	0.230	4.27	OK
17	0.023	0.230	10.08	OK
18	0.010	0.230	4.45	OK
19	0.017	0.230	7.18	OK
20	0.006	0.230	2.78	OK
21	0.012	0.230	5.29	OK
22	0.003	0.230	1.41	OK
23	0.006	0.230	2.74	OK
24	0.005	0.230	2.34	OK
25	0.009	0.230	3.80	OK
26	0.003	0.230	1.52	OK
27	0.013	0.230	5.58	OK
28	0.003	0.230	1.18	OK
29	0.011	0.230	4.83	OK
30	0.003	0.230	1.26	OK
31	0.011	0.230	4.79	OK
32	0.002	0.230	0.99	OK
33	0.010	0.230	4.25	OK
34	0.003	0.230	1.32	OK
35	0.006	0.230	2.77	OK
36	0.003	0.230	1.17	OK
37	0.004	0.230	1.54	OK
38	0.003	0.230	1.16	OK
39	0.005	0.230	2.03	OK
40	0.003	0.230	1.40	OK

6. VOLTAGE FLUCTUATIONS & FLICKER TEST

6.1. Test Equipment

Same as Section 5.1.

6.2. Block Diagram of Test Setup

Same as Section 5.2.

6.3. Test Standard

EN61000-3-3:2008

6.4. Limits of Voltage Fluctuation and Flick

Test Item	Limit	Note
P_{st}	1.0	P_{st} means Short-term flicker indicator
P_{lt}	0.65	P_{lt} means long-term flicker indicator
T_{dt}	500ms	T_{dt} means maximum time that dt exceeds 3.3%
$d_{max}(\%)$	4%	d_{max} means maximum relative voltage change.
$d_c(\%)$	3.3%	d_c means relative steady-state voltage change.

6.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

6.6. Operating Condition of EUT

Same as Section 5.6.

6.7. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions. During the flick measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

6.8. Test Results

PASS.

Please refer to the following page.

Flicker Test Summary per EN/IEC61000-3-3 (Run time)

EUT: LCD Monitor M/N:L270UL
 Test category: All parameters (European limits)
 Test date: 2013-6-23 Start time: 10:11:38
 Test duration (min): 10 Data file name: F-000021.cts_data
 Comment: Running "H" Pattern And 1KHz Playing
 Customer: TPV

Tested by: John
 Test Margin: 100
 End time: 10:21:59

Test Result: Pass


Status: Test Completed

Pst and limit line

European Limits



Plt and limit line

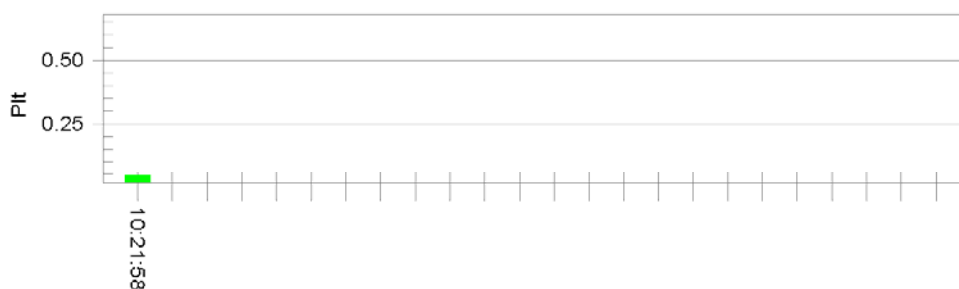

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.96		
Highest dt (%):	-0.46	Test limit (%):	3.30 Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.49	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.101	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.044	Test limit:	0.650 Pass

7. IMMUNITY PERFORMANCE CRITERIA

Performance Level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

1. Based on the used product standard
2. Based on the declaration of the manufacturer, requestor or purchaser

Performance criterion A

When seen from the normal viewing distance, the EUT shall operate with no change beyond the manufacturer's specification, in flicker, colour, focus and jitter (except for the power frequency magnetic field test).

Power frequency magnetic field test

For CRT monitors, the following also applies:

The jitter shall be measured using a measuring microscope as specified in 6.6.14 of ISO 9241-3.

The jitter (in mm) shall not exceed the value $\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$ when the monitor is immersed in a continuous magnetic field of 1A/m (r.m.s.) at one of the power frequencies of 50Hz.

Alternatively, a field of 50A/m may be applied, and a transparent graduated mask used to assess the jitter. In that case, the jitter shall not exceed 50 times the value in the above formula.

NOTE-This test level is used to simplify the measurement of jitter. Lesser values of the test level may be used if non-linearity is experienced, due to, for example, saturation of screening material.

The EUT shall be tested in two positions, both perpendicular to the magnetic field.

Performance criterion B

Screen disturbances during the application of the test are permissible.

Performance criterion C


Failures which are not self-recovered after removal of the external disturbance, but which can be recovered to normal operation by reset or reboot are permissible.

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	EM Test	Dito	V0503100053	Dec.03,12	1 Year

8.2. Block Diagram of Test Setup

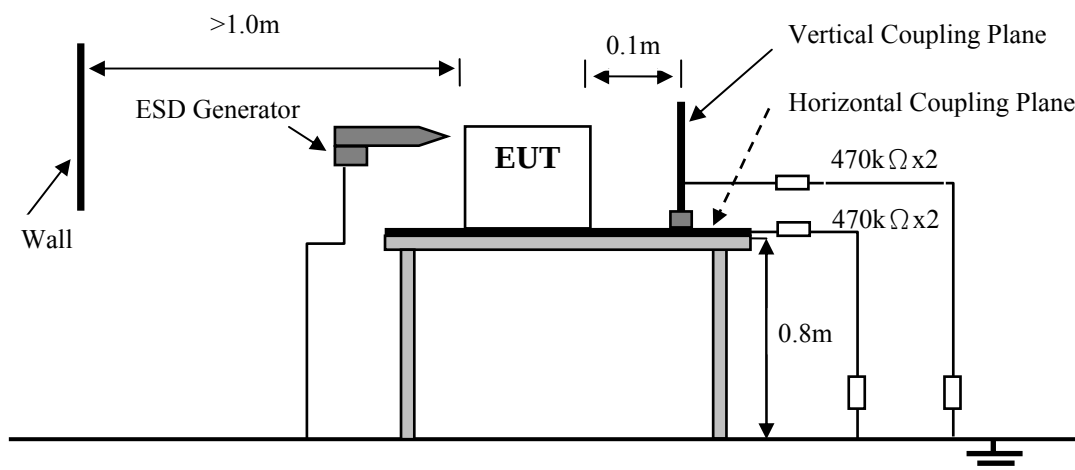

8.3. Test Standard

EN 55024: 2010 (IEC 61000-4-2: 2008)

(Severity Level 1 & 2 & 3 for Air Discharge at 2 kV & 4 kV & 8kV,
Severity Level 1 & 2 for Contact Discharge at 2 kV & 4kV)

8.4. Severity Levels and Performance Criterion

Severity Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)	Performance criterion
1.	2	2	B
2.	4	4	
3.	6	8	
4.	8	15	
X	Special	Special	

8.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

8.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 8.2.

8.7. Test Procedure

8.7.1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

8.7.2. Contact Discharge:

All the procedure was same as Section 8.7.1. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

8.7.3. Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

8.7.4. Indirect discharge for vertical coupling plane:

At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Electrostatic Discharge Test Results

Audix Technology (Shenzhen) Co., Ltd.

Applicant	: TPV Electronics (FuJian) Co., Ltd.	Test Date	: Jun.23, 2013
EUT	: LCD Monitor	Temperature	: 24±0.6°C
M/N	: L270UL	Humidity	: 50±3%
Test Voltage	: AC 230V/50Hz	Test Mode	: Same as section 3.6
Test Engineer	: John	Pressure	: 101±1KPa
Required Performance	: B	Actual Performance	: A & B

Air Discharge: ±2kV ±4kV ±8kV # For Air Discharge each Point Positive 10 times and negative 10 times discharge.

Contact Discharge: ±2kV ±4kV # For Contact Discharge each point positive 25 times and negative 25 times discharge

For the time interval between successive single discharges an initial value of one second.

Discharge Voltage (kV)	Type of discharge	Dischargeable Points	Performance		Result (Pass/Fail)
			Required	Observation	
±2	Contact	2,3,10,11	B	A	Pass
±4	Contact	2,3, 10,11	B	B	Pass
±2	Air	1,2,3,4,5,6,7,8,9,12	B	A	Pass
±4	Air	1,2,3,4,5,6,7,8,9,12	B	A	Pass
±8	Air	1,2,3,4,5,6,7,8,9,12	B	B	Pass
±2	HCP-Bottom	Edge of the HCP	B	A	Pass
±2	VCP-Front	Center of the VCP	B	A	Pass
±2	VCP-Left	Center of the VCP	B	A	Pass
±2	VCP-Back	Center of the VCP	B	A	Pass
±2	VCP-Right	Center of the VCP	B	A	Pass
±4	HCP-Bottom	Edge of the HCP	B	A	Pass
±4	VCP-Front	Center of the VCP	B	A	Pass
±4	VCP-Left	Center of the VCP	B	A	Pass
±4	VCP-Back	Center of the VCP	B	A	Pass
±4	VCP-Right	Center of the VCP	B	A	Pass

Discharge Points Description

<u>1</u>	AC In	<u>7</u>	HDMI Port
<u>2</u>	VGA Port	<u>8</u>	Headphone
<u>3</u>	DVI Port	<u>9</u>	Control Port
<u>4</u>	USB Port	<u>10</u>	Metal
<u>5</u>	Audio IN	<u>11</u>	Screws
<u>6</u>	Display Port	<u>12</u>	LCD Screen

Remark: After discharge to the ungrounded part of EUT, it needs the bleeder resistor to remove the charge prior to next ESD pulse.

When Testing "B" Means the monitor will twinkle during test, recover to normal when stop.


Discharge was considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	2#Chamber	AUDIX	N/A	N/A	Apr.20.13	1Year
2.	Signal Generator	Agilent	N5181A	MY49061013	Nov.05,12	1Year
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 13	1Year
5.	Power Sensor	Anritsu	MA2491A	032516	May.08, 13	1Year
6.	Log-periodic Antenna	A&R	AT1080	16512	NCR	NCR

9.2. Block Diagram of Test Setup

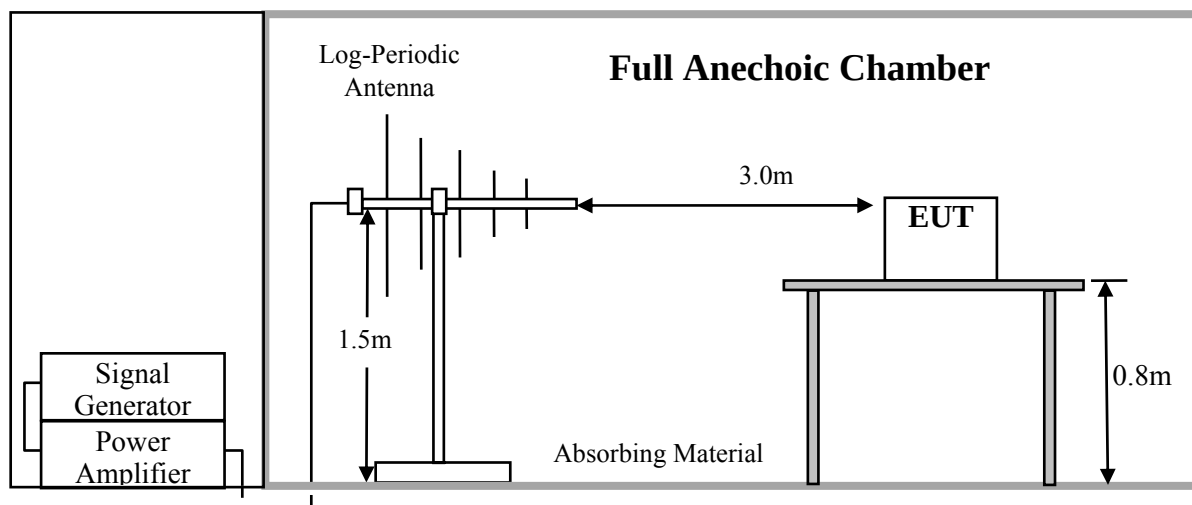

9.3. Test Standard

EN 55024: 2010 (IEC 61000-4-3: 2010)

(Severity Level: 2 at 3V / m)

9.4. Test Severity Level and Performance Criterion

Severity Level	Test Field Strength V/m	Performance Criteria
1.	1	A
2.	3	
3.	10	
X.	Special	

9.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

9.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 9.2.

9.7. Test Procedure

Testing was performed in a Fully anechoic chamber as recommended by IEC 61000-4-3. The EUT was placed on an 80 cm high non-conductive table located in the area of field uniformity. The radiating antenna was placed 3m in front of the EUT and Support system, and dwell time of the radiated interference was controlled by an automated, computer-controlled system. The signal source was stepped through the applicable frequency range at a rate no faster than 1% of the fundamental. The signal was amplitude modulated 80% over the frequency range 80 MHz to 1GHz at a level of 3 V/m. The dwell time was set at 3 s. Field presence was monitored during testing via a field probe placed in close proximity to the EUT. Throughout testing, the EUT was closely monitored for signs of susceptibility. The test was performed with the antennae oriented in both a horizontal and vertical polarization.

All the scanning conditions are as follows:

Test conditions	
Frequency	80MHz-1GHz
Frequency increments step	1% of momentary used
Test level	3V/m (unmodulated)
Dwell time	3s
Test signal	80% amplitude modulated by 1kHz sinusoidal audio signal

9.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

RF Field Strength Susceptibility Test Results

Audix Technology (Shenzhen) Co., Ltd.


Applicant : TPV Electronics (FuJian) Co., Ltd. EUT : LCD Monitor M/N : L270UL Test Voltage : AC 230V/50Hz Test Engineer : Roj Required Performance : A	Test Date : Jun.29, 2013 Temperature : 26±0.6℃ Humidity : 49±3% Pressure : 100.6±1KPa Test Mode : Same as section 3.6 Actual Performance : A																																				
Modulation: ☒ AM ☐ Pulse ☐ none 1 kHz 80%																																					
Frequency Rang :80 MHz -1000MHz																																					
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th colspan="2">Horizontal</th> <th colspan="2">Vertical</th> <th>Result</th> </tr> <tr> <th></th> <th>Required</th> <th>Observation</th> <th>Required</th> <th>Observation</th> <th>(Pass / Fail)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">Front</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Pass</td> </tr> <tr> <td style="text-align: center;">Right</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Pass</td> </tr> <tr> <td style="text-align: center;">Rear</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Pass</td> </tr> <tr> <td style="text-align: center;">Left</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> <td style="text-align: center;">Pass</td> </tr> </tbody> </table>		Horizontal		Vertical		Result		Required	Observation	Required	Observation	(Pass / Fail)	Front	A	A	A	A	Pass	Right	A	A	A	A	Pass	Rear	A	A	A	A	Pass	Left	A	A	A	A	Pass
	Horizontal		Vertical		Result																																
	Required	Observation	Required	Observation	(Pass / Fail)																																
Front	A	A	A	A	Pass																																
Right	A	A	A	A	Pass																																
Rear	A	A	A	A	Pass																																
Left	A	A	A	A	Pass																																
Remark:																																					

10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Burst Tester	TESEQ	NSG3025	28017	May.08, 13	1 Year

10.2. Block Diagram of Test Setup

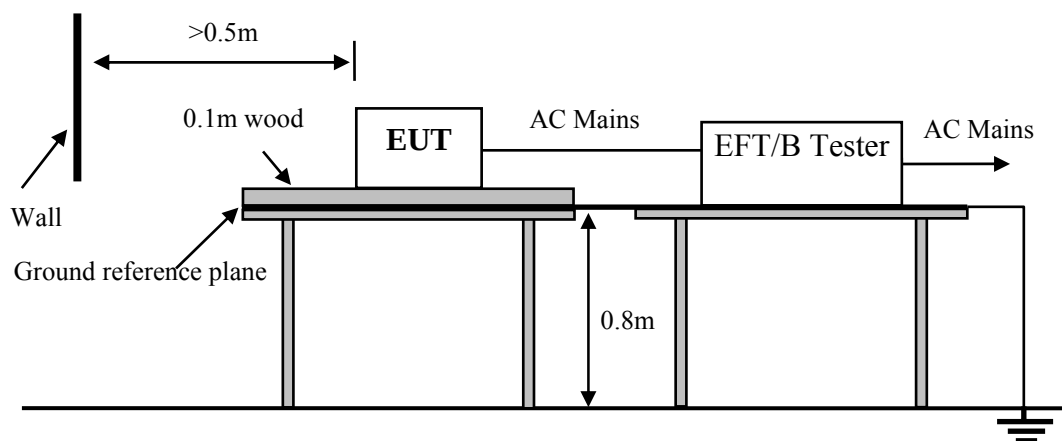

10.3. Test Standard

EN 55024: 2010 (IEC 61000-4-4:2012)
(Severity Level 2 at 1kV)

10.4. Severity Levels and Performance Criterion

Open Circuit Output Test Voltage $\pm 10\%$			
Severity Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines	Performance criterion
1.	0.5 kV	0.25 kV	B
2.	1 kV	0.5 kV	
3.	2 kV	1 kV	
4.	4 kV	2 kV	
X	Special	Special	

10.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

10.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 10.2.

10.7. Test Procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support $0.1\text{m} \pm 0.01\text{m}$ thick. The ground reference plane was $1\text{m} \times 1\text{m}$ metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

10.7.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 1min.

10.7.2. For signal lines and control lines ports:

Ports which are intended to be connected to telecommunication networks (e.g. public switched telecommunication networks, integrated services digital networks, local area networks and similar networks.)

10.7.3. For DC input and DC output power ports:

It's unnecessary to test.

10.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Electrical Fast Transient/Burst Test Results

Audix Technology (Shenzhen) Co., Ltd.

Applicant : <u>TPV Electronics (FuJian) Co., Ltd.</u> EUT : <u>LCD Monitor</u> M/N : <u>L270UL</u> Test Voltage : <u>AC 230V/50Hz</u> Test Engineer : <u>John</u> Required Performance : <u>B</u>	Test Date : <u>Jun.23, 2013</u> Temperature : <u>24±0.6℃</u> Humidity : <u>50±3%</u> Test Mode : <u>Same as section 3.6</u> Pressure : <u>101±1KPa</u> Actual Performance : <u>A&B</u>				
Repetition Frequency : <u>5 kHz</u> Burst Duration : <u>15ms</u> Burst Period: <u>300ms</u>					
Inject Time(s): <u>120s</u> Inject Method: <u>Direct</u> Inject Line: ☒ AC Mains ☐ DC Supply ☐ Signal					
Line	Test Voltage	Performance			Result (Pass/Fail)
		Required	Observation(+)	Observation(-)	
L	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
N	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
PE	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
L N	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
L PE	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
N PE	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
L N PE	0.5kV	B	A	A	Pass
	1kV	B	B	B	Pass
Signal Line	0.5kV				


Remark: When Testing “B” Means the monitor will twinkle during test, recover to normal when stop.

11. SURGE TEST

11.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Transient Test System	EMC PARTNER	TRANSIENT 2000	TRA2006 F-S-T-D-R -1500	Jan.21,13	1 Year
2	CDN	EMC PARTNER	CDN-UTP8	CDN-UTP8-1508	Jan.21,13	1 Year
3	CDN	EMC PARTNER	CDN2000-06-25	CDN2000-06-25 0111	Jan.21,13	1 Year

11.2. Block Diagram of Test Setup

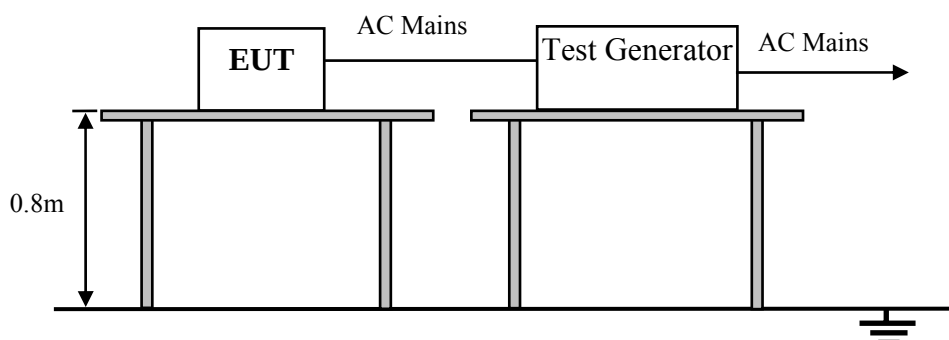

11.3. Test Standard

EN 55024: 2010 (IEC 61000-4-5: 2005)

(Severity Level: Line to Line was Level 2 at 1kV)

11.4. Severity Levels and Performance Criterion

Severity Level	Open-Circuit Test Voltage kV	Performance criterion
1	0.5	B
2	1.0	
3	2.0	
4	4.0	
*	Special	

11.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

11.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 11.2

11.7. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 11.2.
- 2) For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Surge Immunity Test Results

Audix Technology (Shenzhen) Co., Ltd.


Applicant : TPV Electronics (FuJian) Co., Ltd. EUT : LCD Monitor M/N : L270UL Power Supply : AC 230V/50Hz Test Engineer : John Required Performance : B	Test Date : Jun.23, 2013 Temperature : 24±0.6℃ Humidity : 50±3% Test Mode : Same as section 3.6 Pressure : 101±1KPa Actual Performance : A&B										
No.of pluse: ±5 Interval:60 Seconds											
Line : ☒ AC Mains ☐ DC Supply ☐ Signal											
Location	Volt	500V			1kV			2kV			Result
	Phase	Performance			Performance			Performance			(Pass/Fail)
		Required	+	-	Required	+	-	Required	+	-	
L-N	0°	B	A	A	B	B	B				Pass
	90°	B	A	A	B	B	B				Pass
	180°	B	A	A	B	B	B				Pass
	270°	B	A	A	B	B	B				Pass
L-PE	0°	B	A	A	B	A	A	B	B	B	Pass
	90°	B	A	A	B	A	A	B	B	B	Pass
	180°	B	A	A	B	A	A	B	B	B	Pass
	270°	B	A	A	B	A	A	B	B	B	Pass
N-PE	0°	B	A	A	B	A	A	B	B	B	Pass
	90°	B	A	A	B	A	A	B	B	B	Pass
	180°	B	A	A	B	A	A	B	B	B	Pass
	270°	B	A	A	B	A	A	B	B	B	Pass
Signal Line											
Remark: When Testing “B” Means the monitor will twinkle during test, recover to normal when stop.											

12. INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	Agilent	N5181A	MY49061013	Nov.05,12	1 Year
2.	Amplifier	AR	25A250A	19152	NCR	NCR
3.	Power meter	HP	436A	2016A07891	May.08, 13	1Year
4.	Power sensor	Agilent	8482B	MY41090514	Nov.23, 12	1Year
5.	CDN	FCC	FCC-801-M3-25	107	May.08, 13	1 Year
6.	CDN	FCC	FCC-801-M3-25	07045	May.08, 13	1 Year
7.	PC	N/A	N/A	N/A	N/A	N/A
8.	Attenuator	Weinschel	40-6-34	LJ092	May.08, 13	1 Year
9.	EM Injection Clamp	FCC	F-203I-23mm	403	May.08, 13	1 Year
10.	RF Cable	MICABLE	A04-07-07-2M	09111340	NCR	NCR
11.	RF Cable	STORM	MFR-57500	90-195-2MTR	NCR	NCR

12.2. Block Diagram of Test Setup

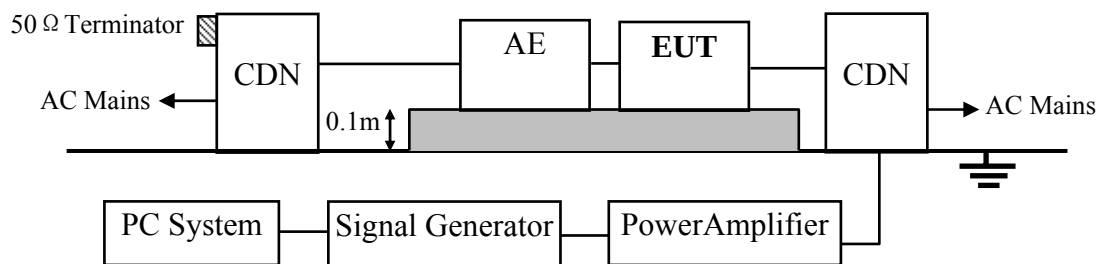

12.3. Test Standard

EN55024: 2010 (IEC61000-4-6: 2008)

(Severity Level 2 at 3V (r.m.s.) and frequency is from 0.15MHz to 80MHz)

12.4. Severity Levels and Performance Criterion

Severity Level	Voltage Level (e.m.f.) V	Performance criterion
1	1	A
2	3	
3	10	
X	Special	

12.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

12.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 12.2.

12.7. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 12.2.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 10 and 30 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

12.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Injected Currents Susceptibility Test Results

Audix Technology (Shenzhen) Co., Ltd.

Applicant : TPV Electronics (FuJian) Co., Ltd. EUT : LCD Monitor M/N : L270UL Power Supply : AC 230V/50Hz Test Engineer : Roj Required Performance : A	Test Date : Jun.29, 2013 Temperature : 25±0.6℃ Humidity : 50±3% Test Mode : Same as section 3.6 Pressure : 100.6±1KPa Actual Performance : A
---	---

Frequency Range (MHz)	Injected Position	Voltage Level (e.m.f.)	Required	Observation	Result (Pass / Fail)
0.15 ~ 20	AC Mains	3V	A	A	PASS
20 ~ 80	AC Mains	3V	A	A	PASS

Modulation Signal: 1kHz 80% AM


Remark:

13. MAGNETIC FIELD IMMUNITY TEST

13.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	May.08, 13	1 Year

13.2. Block Diagram of Test Setup

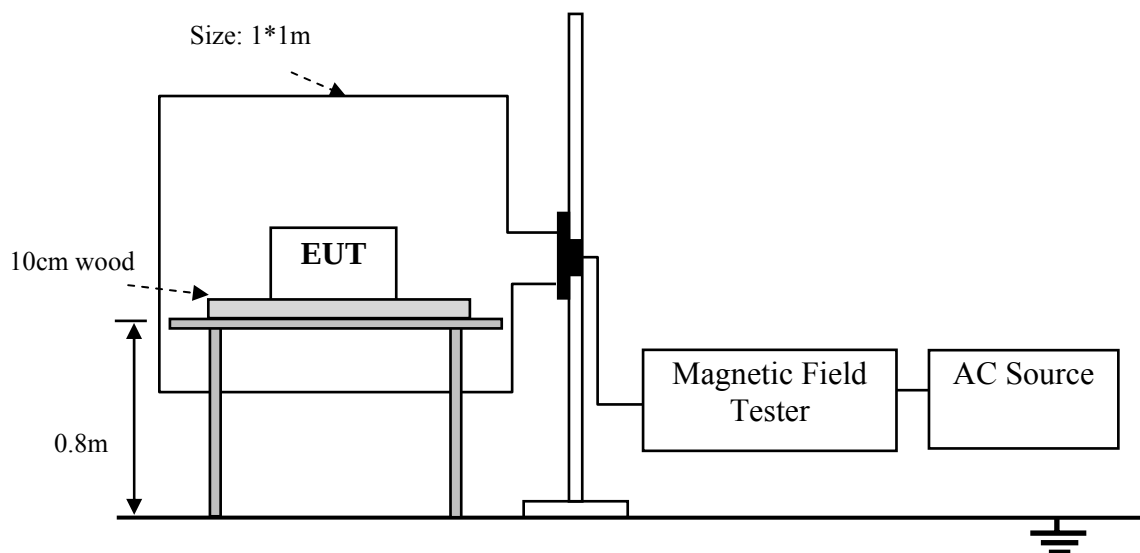

13.3. Test Standard

EN 55024: 2010 (IEC 61000-4-8: 2009)
(Severity Level 1 at 1A/m)

13.4. Severity Levels and Performance Criterion

Severity Level	Magnetic Field Strength A/m	Performance criterion
1.	1	A
2.	3	
3.	10	
4.	30	
5.	100	
X.	Special	

13.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

13.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 13.2.

13.7. Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 13.2. The induction coil was then rotated by 90° in order to expose the EUT to the test field with different orientations.

13.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Magnetic Field Immunity Test Results

Audix Technology (Shenzhen) Co., Ltd.


Applicant	:	TPV Electronics (FuJian) Co., Ltd.	Test Date	:	Jun.29, 2013
EUT	:	LCD Monitor	Temperature	:	26±0.6℃
M/N	:	L270UL	Humidity	:	50±3%
Test Voltage	:	AC 230V/50Hz	Test Mode	:	Same as section 3.6
Test Engineer	:	Roj	Pressure	:	100.6±1KPa
Required Performance	:	A	Actual Performance	:	A
Test Level	Testing Duration	Coil Orientation	Required	Observation	Result (Pass/Fail)
1A/m	5 min / coil	X	A	A	PASS
1A/m	5 min / coil	Y	A	A	PASS
1A/m	5 min / coil	Z	A	A	PASS
Remark:					

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Main Interference Simulator	HAEFELY	PLINE 1610	083690-05	May.08, 13	1 Year

14.2. Block Diagram of Test Setup

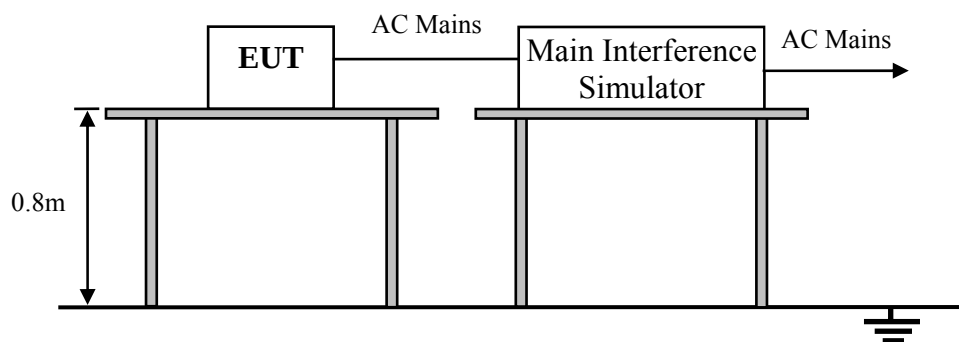

14.3. Test Standard

EN 55024: 2010 (IEC 61000-4-11: 2004)

14.4. Severity Levels and Performance Criterion

Test Level %U _T	Voltage dip and short interruptions %U _T	Duration (in period)	Performance Criterion
0	100	250	C
0	100	0.5	B
70	30	25	C

14.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

14.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 14.2.

14.7. Test Procedure

- 1) The EUT and test generator were setup as shown on Section 14.2.
- 2) The interruption is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Voltage Dips And Interruptions Test Results

Audix Technology (Shenzhen) Co., Ltd.

Applicant	: TPV Electronics (FuJian) Co., Ltd.	Test Date	: Jun.29, 2013
EUT	: LCD Monitor	Temperature	: 25±0.6℃
M/N	: L270UL	Humidity	: 50±3%
Power Supply	: AC 230V/50Hz AC 100V/50Hz	Test Mode	: Same as section 3.6
Test Engineer	: Roj	Pressure	: 100.6±1KPa
Required Performance	: B & C	Actual Performance	: A & B

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in period)	Phase Angle	Required	Observation	Result (Pass / Fail)
0	100	0.5P	0° -360°	B	A	PASS
70	30	25P	0° -360°	C	A	PASS
0	100	250P	0° -360°	C	B	PASS

Note 1: U_T is the rated voltage for the equipment.

Note 2: The frequency of the test voltage shall be within ±2% of the rated frequency, the output voltage shall be within ±5% of the rated voltage.

Remark: "B" test picture of EUT was little flicker, and after finishing the test, it can be self recovery.

15. PHOTOGRAPHS

15.1. Photos of Power Line Conducted Emission Test

PC Mode:




DVD Mode:




15.2. Photos of Radiated Emission Test (In Anechoic Chamber)


PC Mode:

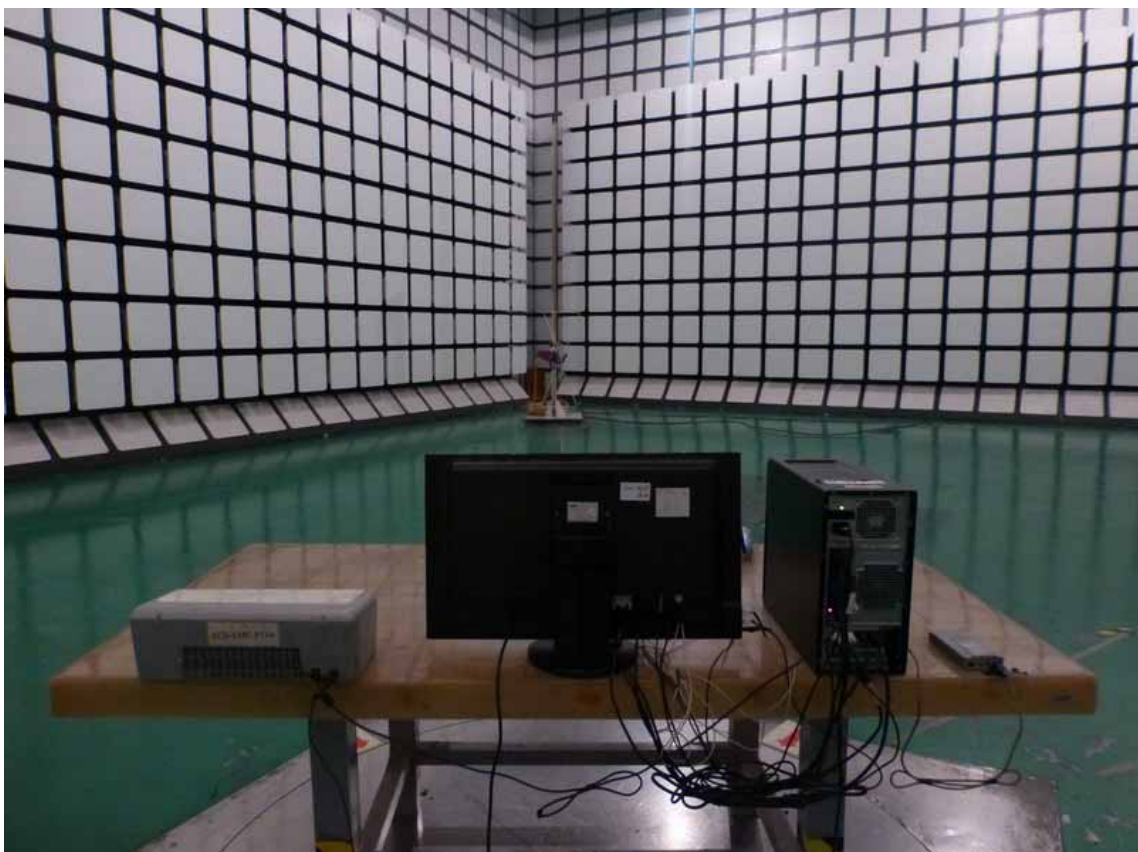


DVD Mode”

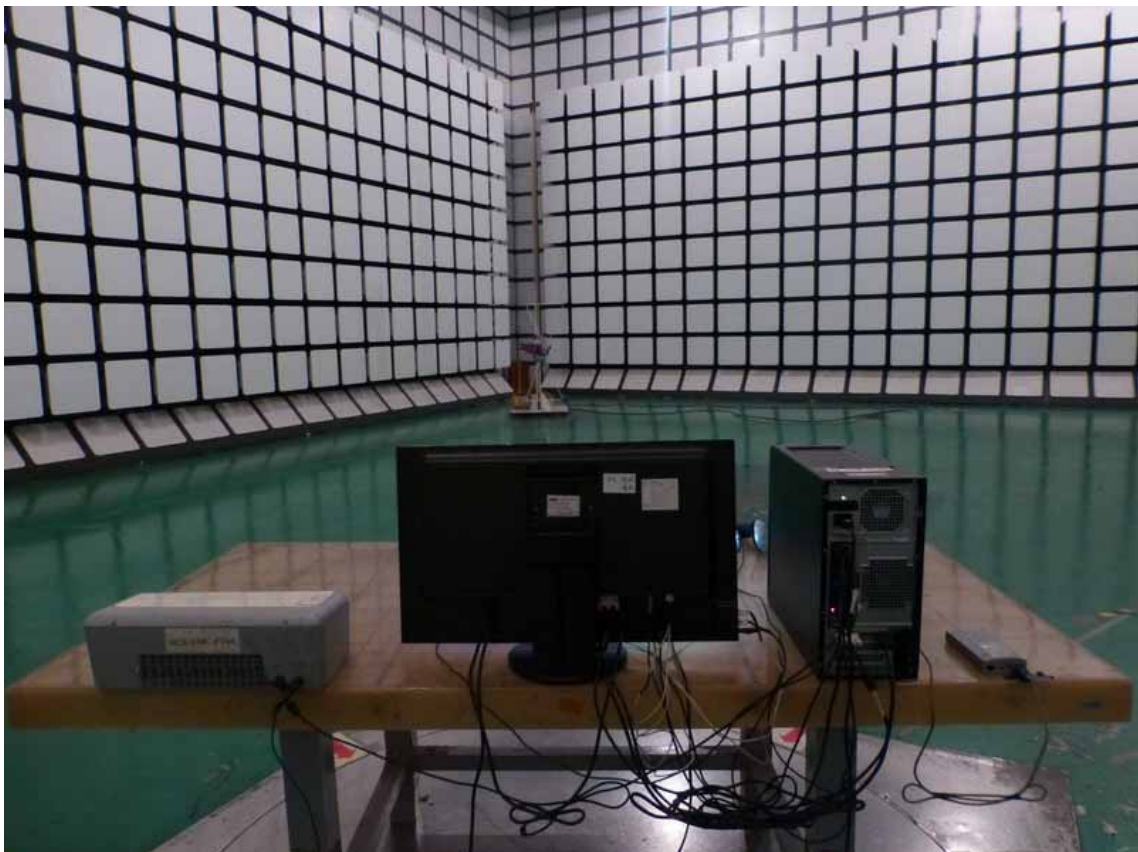

The Worst Resolution: 1.8m Cable VGA, 1920*1080@60Hz
PC Mode:

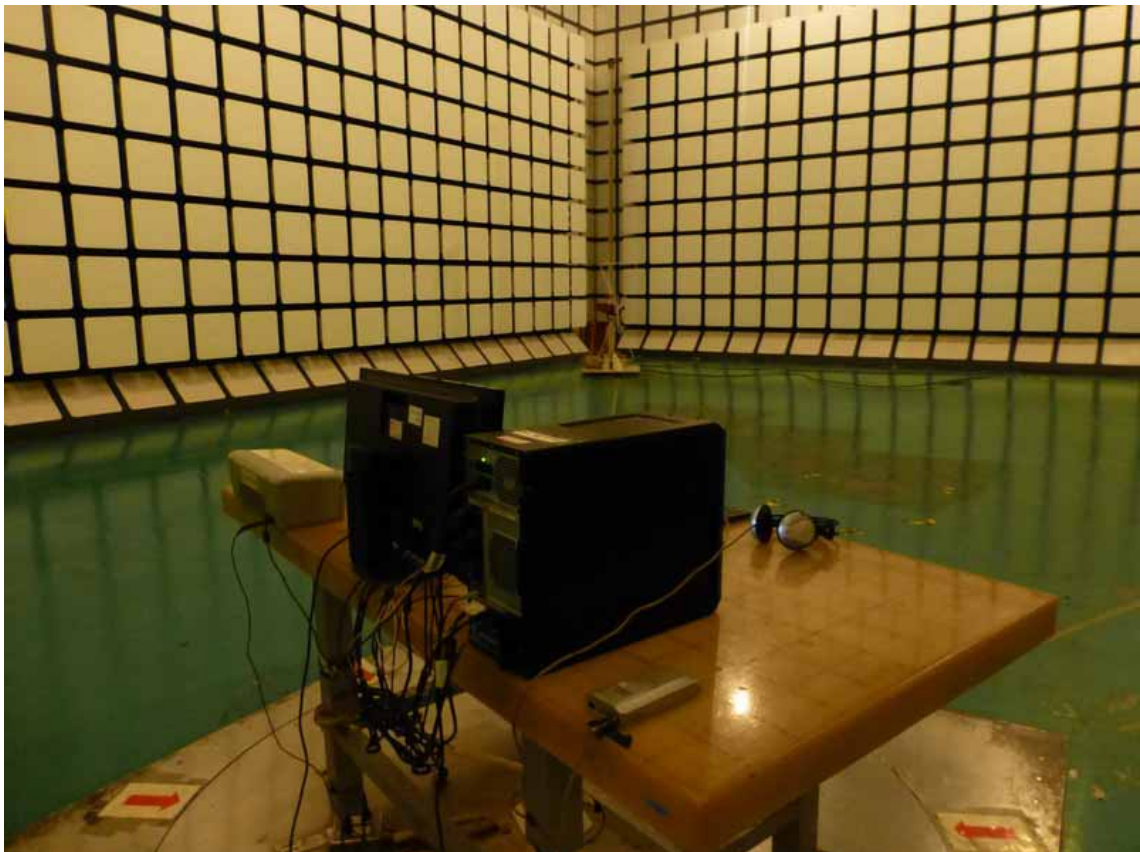

(At Anechoic 3m Chamber Test 1GHz –6GHz)

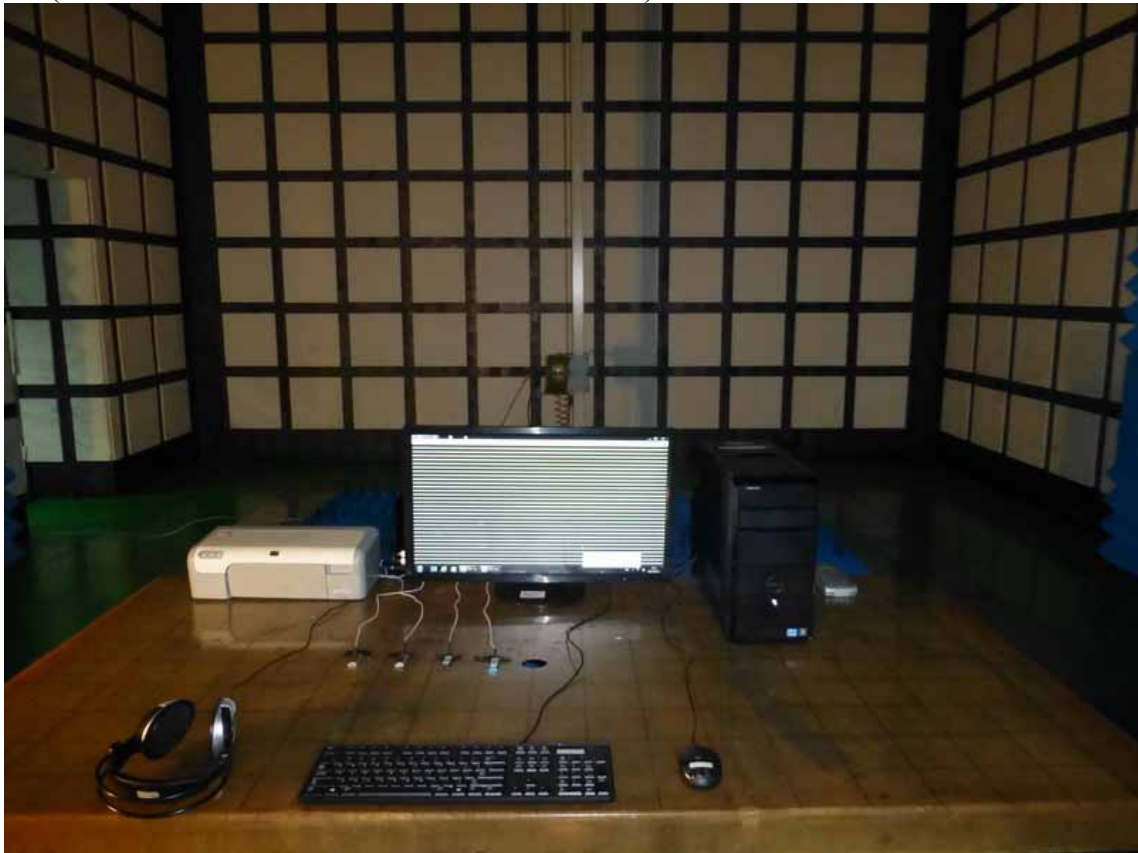

15.3.Photo of Harmonic / Flicker Test



15.4. Photos of Electrostatic Discharge Immunity Test



15.5.Photo of RF Strength Susceptibility Test



15.6.Photo of Electrical Fast Transient/Burst Immunity Test




15.7.Photo of Surge Test



15.8.Photo of Injected Currents Susceptibility Test



15.9. Photo of Magnetic Field Test

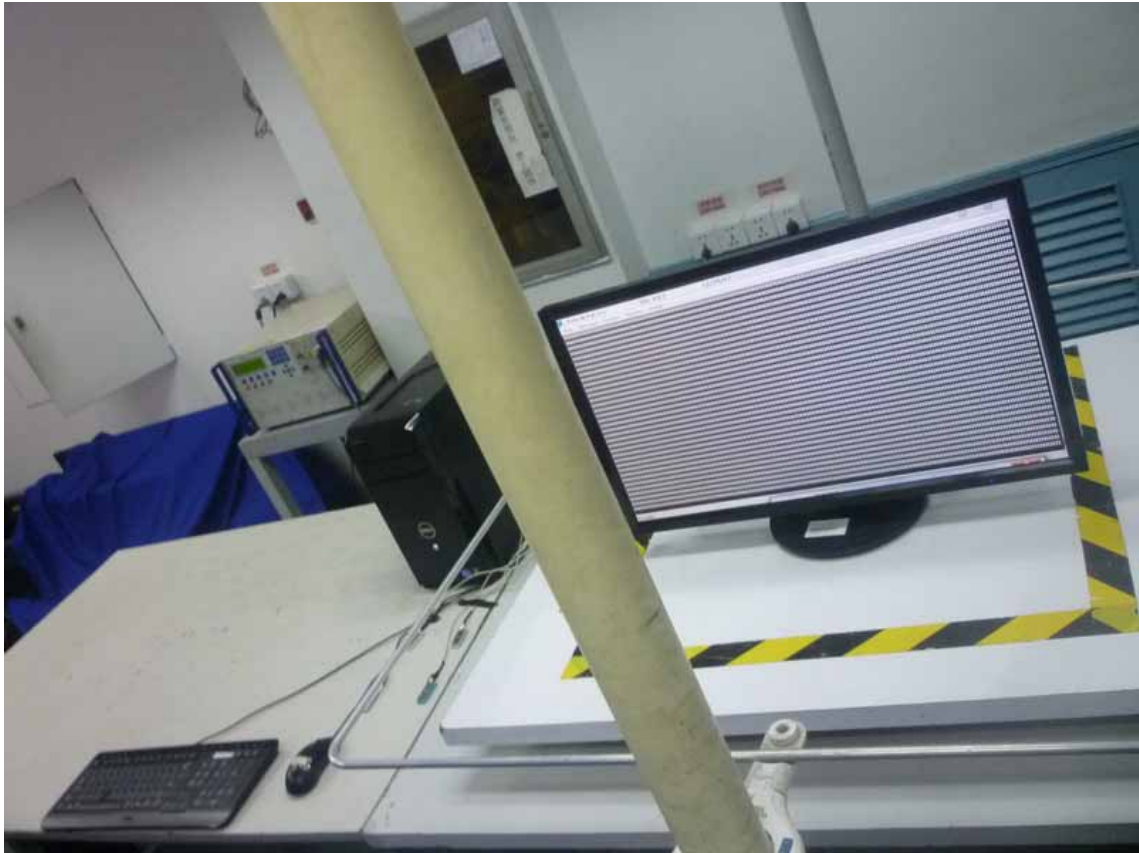

15.10. Photo of Voltage Dips and interruptions test

