


Digital Signage Display

# NEC MultiSync P754Q

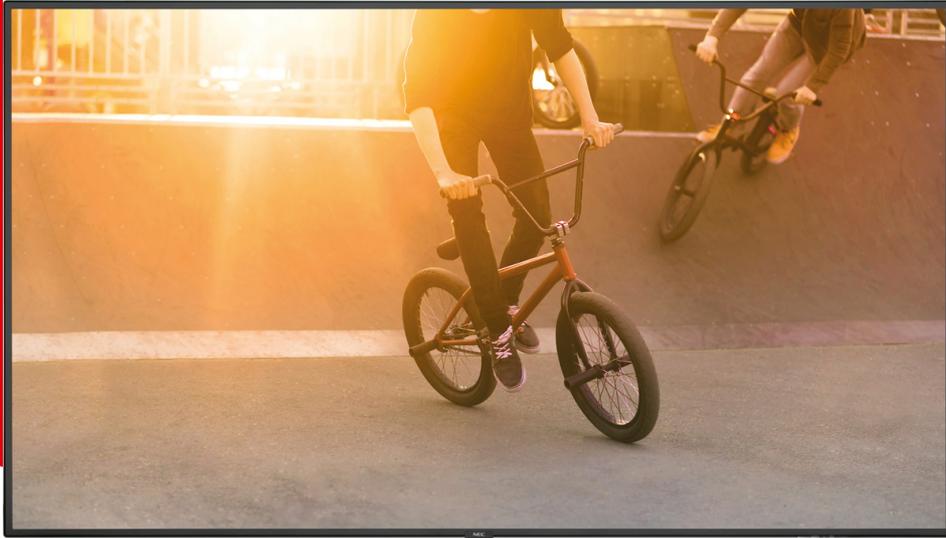

- Superb readability – crisp playback of content thanks to high brightness output of 650 cd/m<sup>2</sup> and anti-reflective screen surface, even under varying and demanding ambient conditions.
- Future Ready with Open Modular Intelligence Expansion – upgrade the power of your display by integrating one of NEC's options for OPS Slot-in PCs, Raspberry Pi compute modules or signal interfaces.
- Enhanced imaging performance – advanced settings of relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.
- Mission-critical 24/7 ready operation – the selection of industrial-grade components and careful design focused on demanding usage scenarios accompany an impressive and continuous viewer experience.
- Future-proof signal connectivity and processing – numerous native UHD resolution inputs with 60Hz refresh rate, plus automatic upscaling to UHD for other signals, provide "pixel-free viewing".

# Specifications

## DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	75 / 189
Aspect Ratio	16:9
Brightness (cd/m <sup>2</sup> )	650, 450 (shipment setting)
Contrast Ratio	1200:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) @ CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Haze Level [%]	28

## POWER SUPPLY AND OPERATING ENVIRONMENT

Power Consumption (W) (Operating MAX)	250
Operating Temperature (°C)	0 to 40
Humidity (%)	20 to 80

## INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	4; 400 x 400 (FDMI); 600 x 400 (FDMI)

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

DisplayPort	1
Audio/Headphone 3.5mm Jack	1

## ACCESSORIES

Shipping Content	CD-ROM (User Guides / Manuals); Display; DisplayPort Cable; Remote Control; USB cable
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional

## KEY SPECIFICATIONS

24/7 Operation Certified	•
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	•
Built in Speakers (W)	10 + 10
Power Management	•
Cabinet Colour	Black
Colour Versions	Optional coloured overframes
Temperature Sensor	•
Brightness Sensor	•

## WEIGHTS AND MEASURES

Bezel Size (L/R) mm	14.8
Bezel Size (U/L) mm	14.8
Product Dimensions (W/H/D) mm	1,681 x 960 x 71
Shipping Carton Dimensions (W/H/D) mm	1,830 x 1,190 x 280
Product Weight Without Stand (Kg)	53
Shipping Weight (Kg)	65.5

## CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	3
DisplayPort	2
Audio 3.5mm Jack	1

## CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	4

