



WEEE report

COLOR MONITOR **Multi Sync E273F**

MODELS: E273F

1st Edition

NEC DISPLAY SOLUTIONS, LTD.


202106

DISASSEMBLY


- Before you disassemble the set, turn off power and pull out the power plug.
- Use the proper screwdriver. If oversize or undersize screwdriver is used, screws may be damaged.
- Assembly is reversed process of disassembly.
- Disassembly time: ≤ 15 minutes

1 Remove stand

- Unscrew screws marking below and remove stand

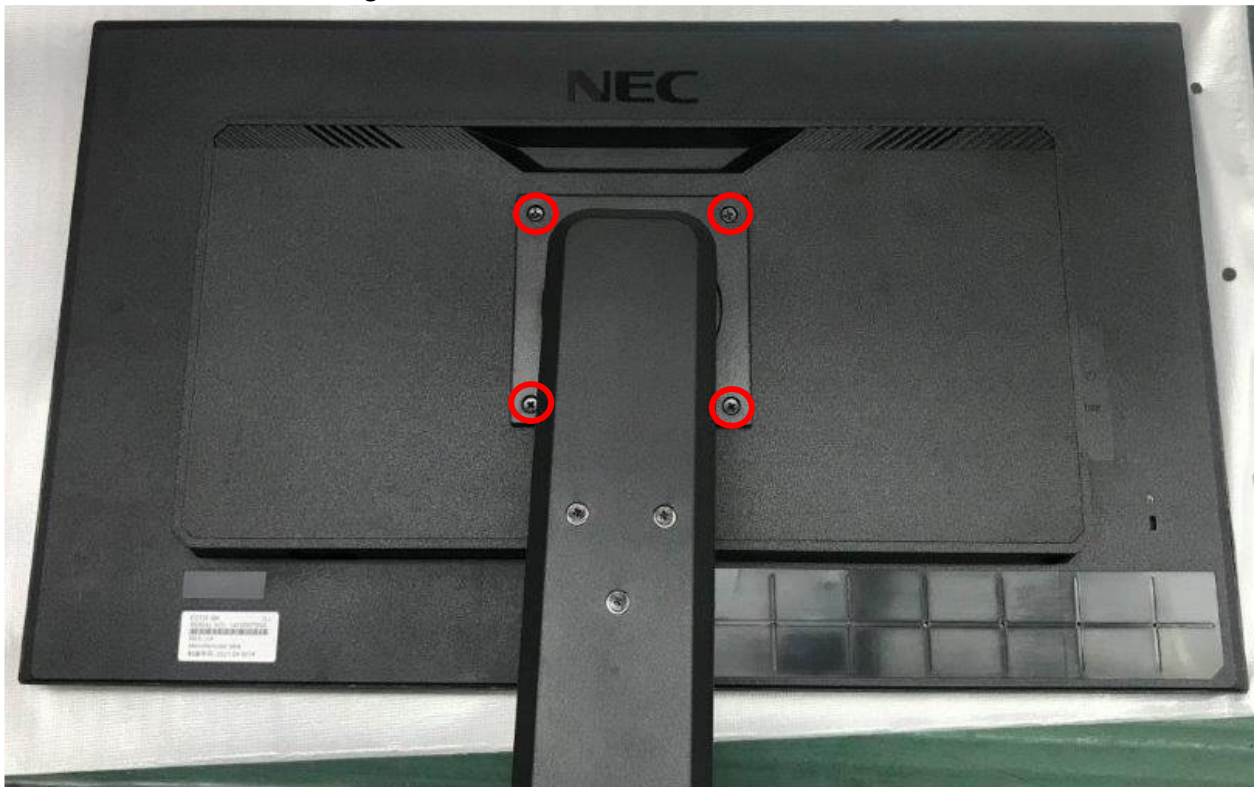


- Remove rear cover

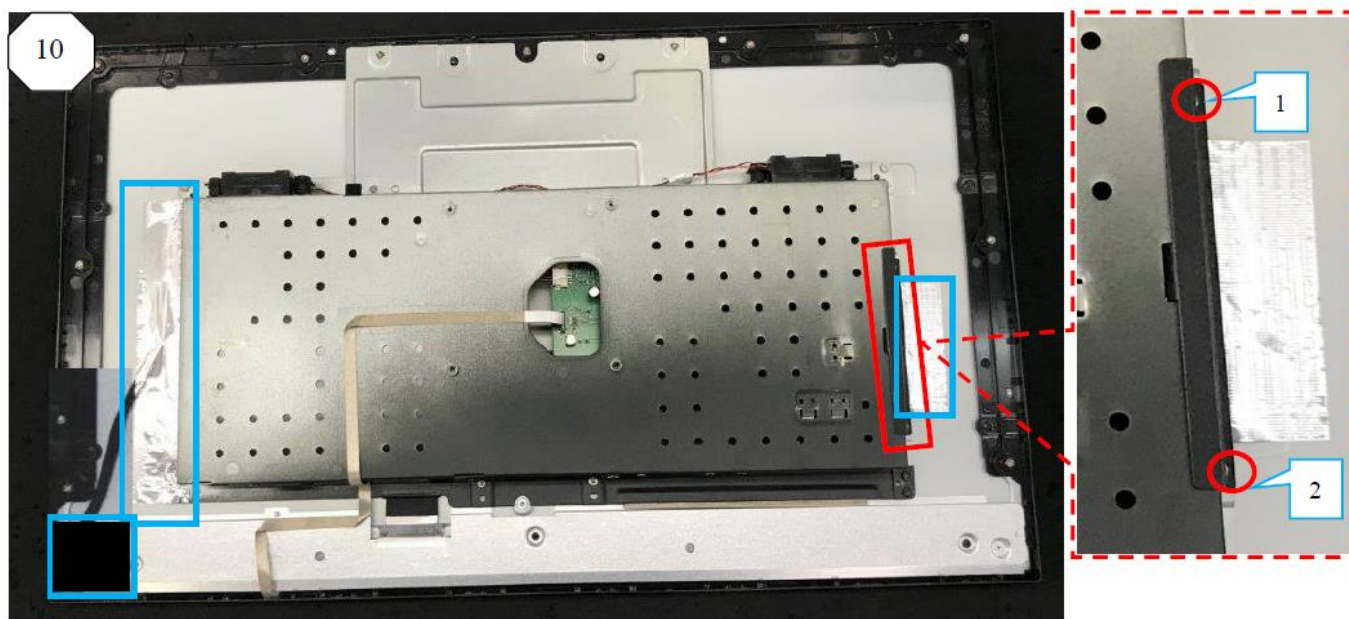



2 Remove wire & iron cover

- Unlock the wires

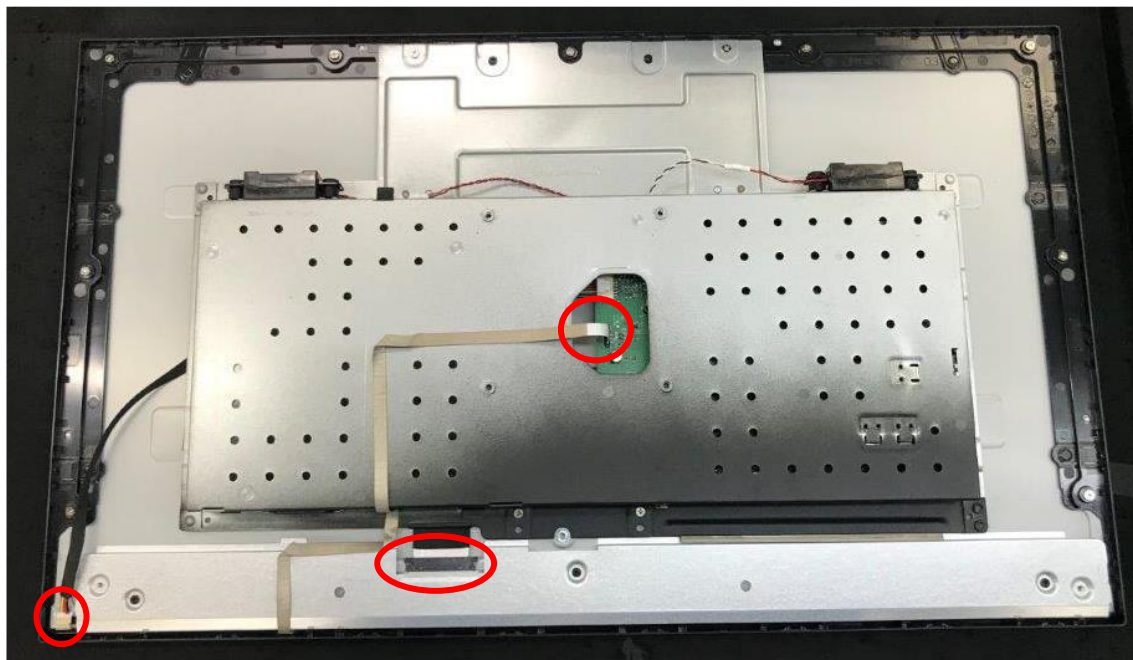





- Unscrew screws marking below and remove cover

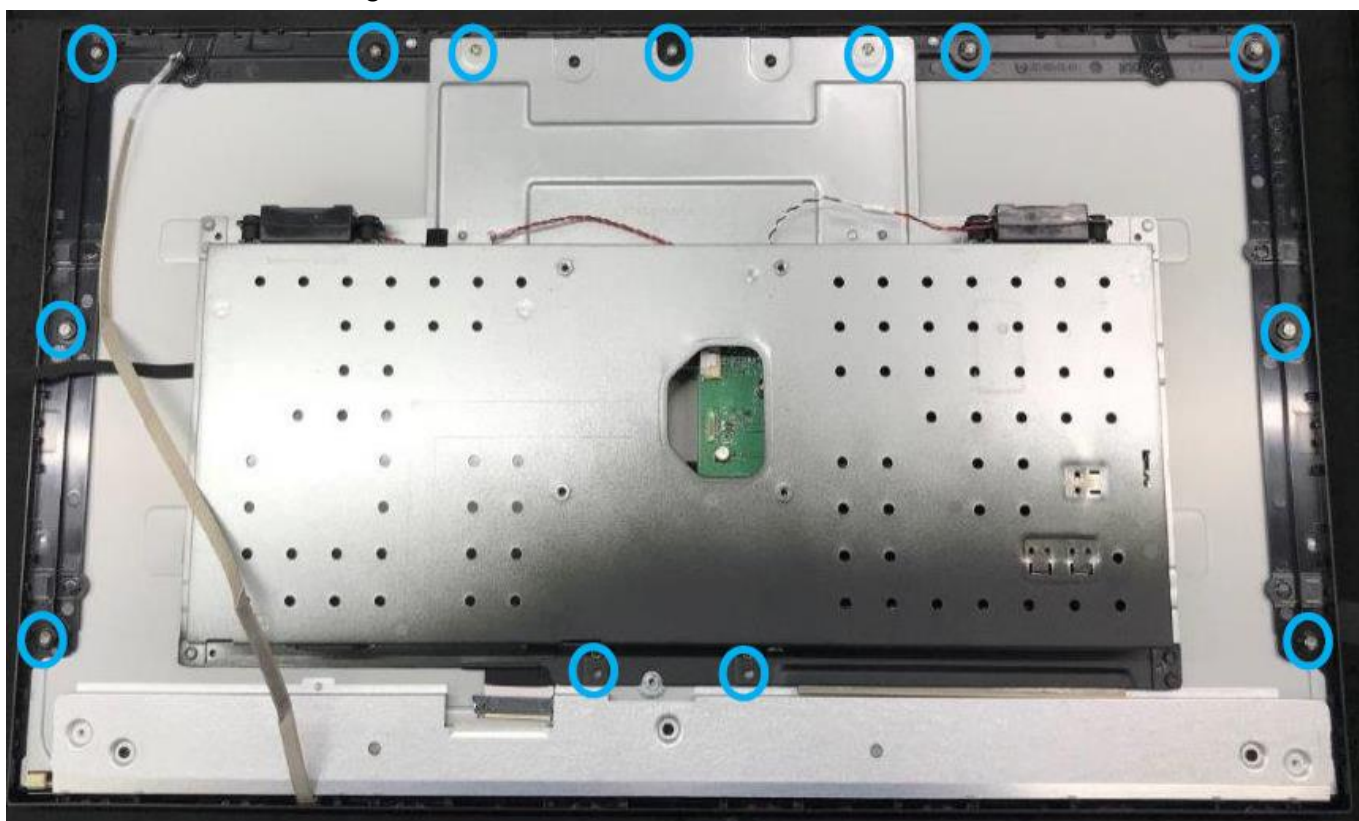

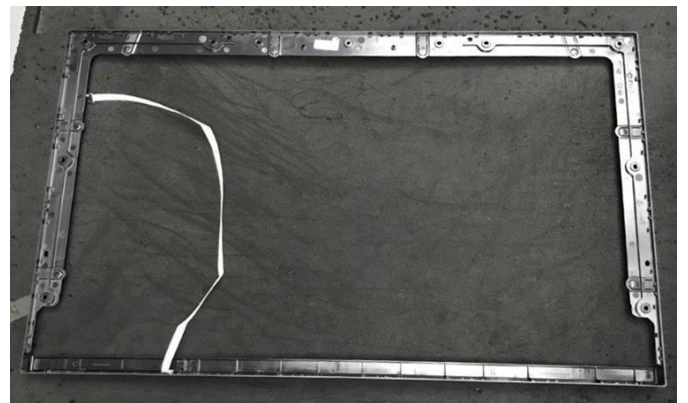



3 Remove printed circuit boards and wires

- Unscrew the marked screws and remove Mainboard, power board.

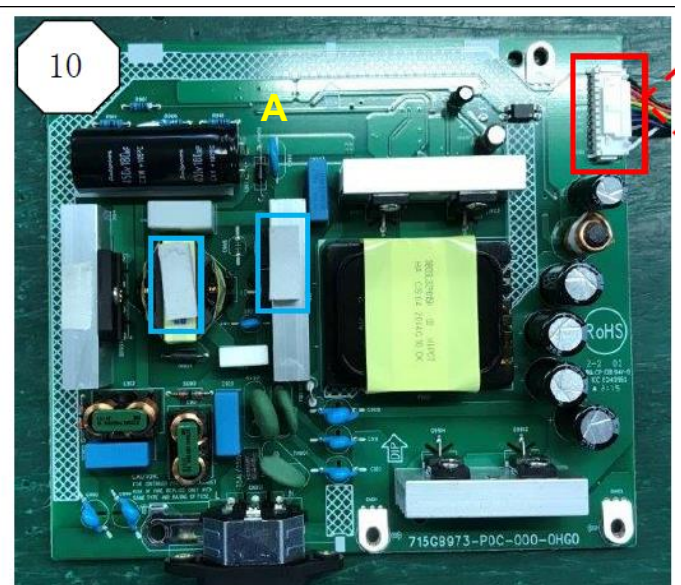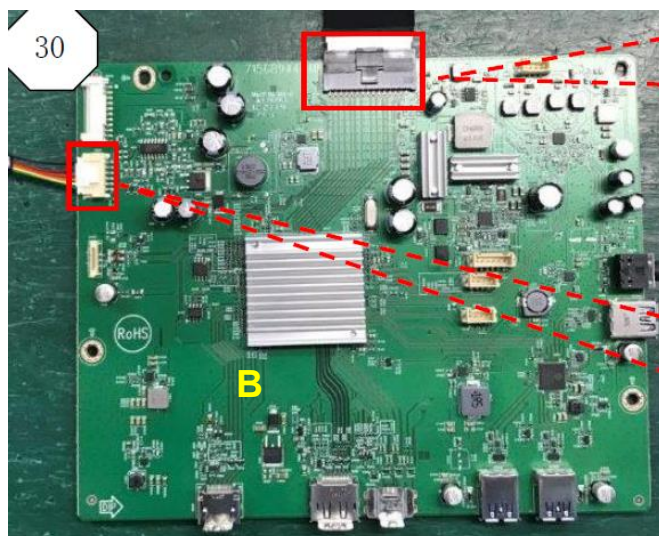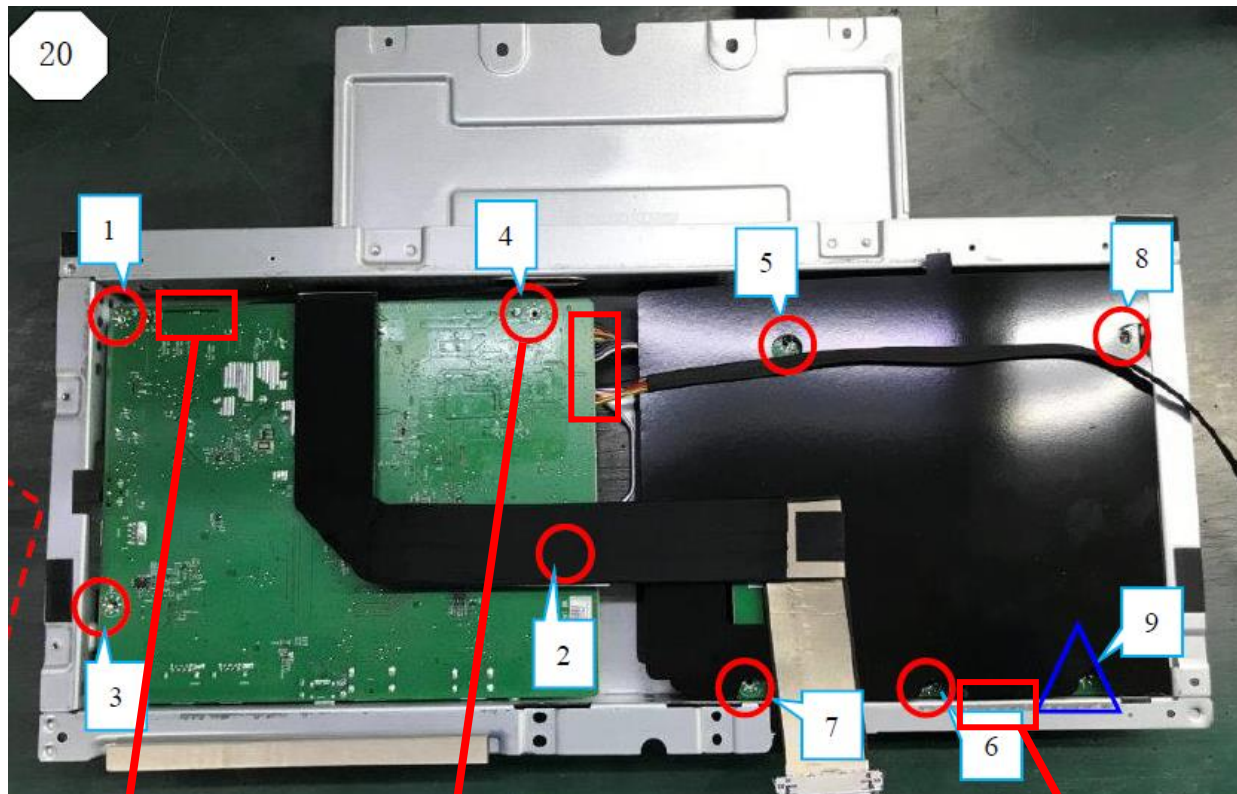

4. Remove speakers

- Unscrew the marked screws and remove speakers.

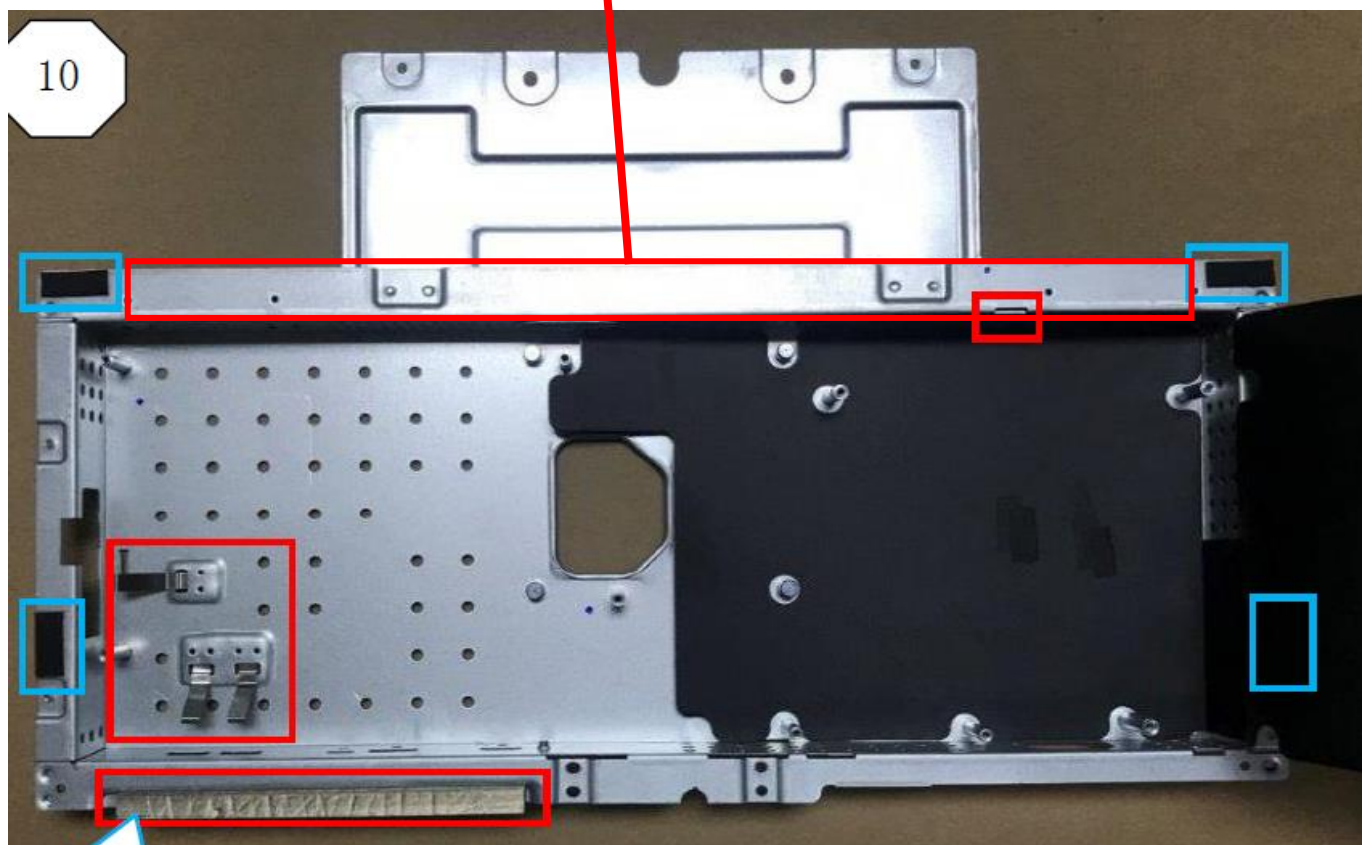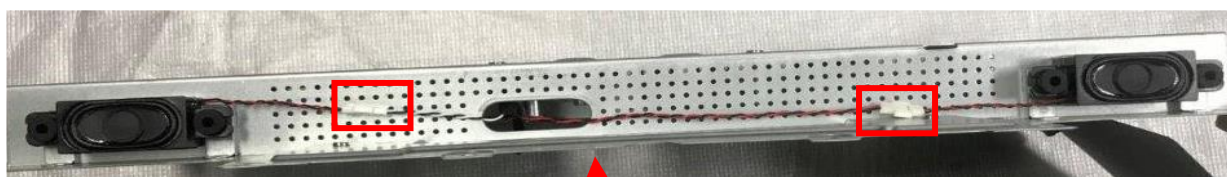

Special handling part:

Item	Part name	Quantity	WEEE Annex VII materials and components
A	Power board	1	Printed circuit boards of mobile phones, and other PCBs whose surface is greater than 10cm ²
B	Main board	1	Printed circuit boards of mobile phones, and other PCBs whose surface is greater than 10cm ²
C	Panel	1	Liquid crystal displays of a surface greater than 100cm ² and all those back-lighted with gas discharge lamps

Package

