


Interactive Displays

Sharp Flex Battery

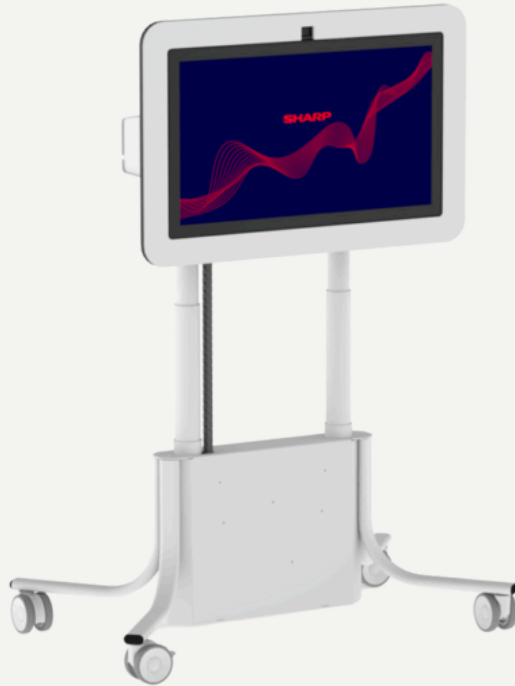

Ideal for collaborating with colleagues, increasing engagement when teaching and learning, and for enhancing care.

- 32" P-CAP touchscreen allows for up to 40 simultaneous touch points.
- Full HD screen for viewing content in high resolution.
- New Easy-Clean Halo Screen Protection System.
- Built-in HD camera and microphone for video conferencing or staying connected with loved ones.
- Medical-grade power system.
- The battery can be fully charged from empty in 3 hours and provides up to 8 hours of continuous use.
- Electronically height adjustable for greater flexibility.
- PIEZO anti-collision technology stops the screen when it comes into contact with a hard surface.
- Highly adaptable with the ability to adjust the angle of the display from vertical to horizontal.
- Counterbalance tilt technology helps with safety whilst adjusting the angle of the display, creating a smooth and controlled user experience.
- Screen built onto a stylish powder-coated steel frame with easy-lock wheels.
- Wi-Fi and Bluetooth connectivity, and access to thousands of apps through Google Play Store.

Specifications

Built in Speakers (W)	2 x 5W
Panel Technology	TFT-LCD
Native Resolution (Pixels)	1920 x 1080
Backlight Technology	LED / Full Array
Brightness (cd/m2)	430
Contrast Ratio	3000:1
On Screen Display (OSD)	Brightness, volume, colour
Response Time (typ.) [ms]	8
Number of Touch Points	40
Pen Mode / Finger Mode	True
Palm Cancellation	True
Touch Thru	Supports gloves up to 1.4mm
[AVSpecificationTechnology]	Projected Capacitive Touch (P-CAP)
[AVSpecificationAndroidPlayerOs]	Android 14 Google Play Services
[AVSpecificationAndroidPlayerCpu]	Qualcomm Snapdragon QCS6490
[AVSpecificationAndroidPlayerMemory]	8GB RAM
[AVSpecificationAndroidPlayerWiFi]	802.11a/b/g/n/ac
[AVSpecificationAndroidPlayerBluetooth]	Bluetooth 5.2
[AVSpecificationDimensionsHeightMinMm]	922
[AVSpecificationDimensionsHeightMaxMm]	1587
[AVSpecificationDimensionsWidthWithStandMm]	1113
[AVSpecificationDimensionsDepthWithStandMm]	724
Landscape	True
Portrait	True
Mounting Screw Specification (Size/Max Length)	M6
CE, CB Report	True
Presence of Lead (Accepted application of RoHS Directive)	True
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
[AVSpecificationWebcam]	Full HD
[AVSpecificationStillsMp]	8
WLAN	True
Diagonal Size (inches / cm)	32

Limited Manufacturer's Warranty (yrs.)	3
Computer Input - Plug and Play	True
Power Management	True
Option Slot Interface	True
Equipment Space (Mounting)	True
Installation Handles	True
Fanless	True
Residual Image Reduction Feature	True
Multi Language OSD	True
Remote Management	True
Daisychain (Mirror mode)	True
Adjustment Lock Feature	True
Auto Input Change	True
Gain Control	True
Screen Adjustment	True
Colour Temperature Adjustment	True
Gamma Adjustment	True
Self-Adjust	True
Hardware Diagnosis	True
Monitor Control Software Support	True
Overscan Setting (AV)	True
Audio Selection per Image INPUT	True
Internal/External Speaker Selection	True
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Operating Temperature (oC)	0 - 35
Storage Humidity [%]	20
Storage Humidity [%]	80
Battery	
[AVSpecificationBattery]	[12-8v-32ah-lithium-iron-phosphate]
[AVSpecificationBatteryRechargeTime]	[3-h-from-empty]
[AVSpecificationBatteryTypicalRunTime]	[8-hours]
Accessories	
[AVSpecificationAccessories]	Portrait Mount Sticker Kit, De-Branding Sticker
Power Consumption on-mode (IEC62087:2012)	On: 44W. Sleep: 1.43W
Power Supply	Supplied from main unit
[AVSpecificationWeightWithoutBatteryKg]	73
[AVSpecificationWeightWithBatteryKg]	86
Audio 3.5mm Jack	1
Light Sensor Processing	-
Optimum Resolution	1920 x 1080 at 60 Hz