


Professional displays for easy signage

PN-Y496P

Bring your messages to life effortlessly

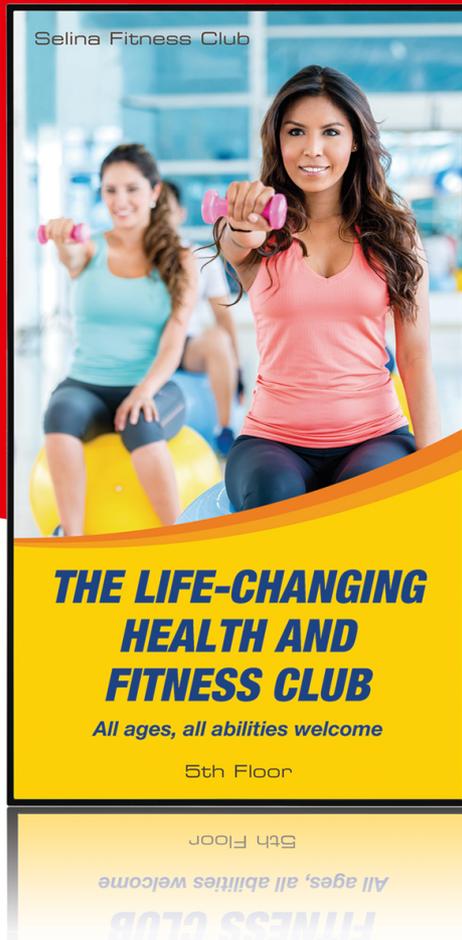

- 49" display for professional 24/7 signage
- Simple and easy signage with speakers 7W+7W and USB Media Player
- LED, edge lit
- Portrait, landscape, face-Up and face-down installation support
- 1920 x 1080 pixels with 450cd/m2
- Contrast 1100:1
- Slim bezel design suitable for public spaces
- IPS Display Technology

Specifications

DISPLAY MODULE DATA

Panel Technology	LCD IPS
Native Resolution (Pixels)	1920 X 1080
Diagonal Size (inches / cm)	49 / 123.2
Aspect Ratio	16:9
Backlight Technology	Edge LED
Brightness (cd/m2)	450
Contrast Ratio	1100:1
Display Colours	16.77 Million
Response Time (grey to grey avg) ms	12
Pixel Pitch (mm H/V)	0.559 x 0.559
Viewing Angle (H/V)0 CR >10	178 / 178

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100 - 240 / 50-60
Power Consumption (W) (Operating MAX)	87
Power Consumption (W) (Standby)	0.5
Operating Temperature (oC)	0 - 40
Humidity (%)	20 - 80
Heat Dissipation (BTU/h) MAX	273

INSTALLATION

Landscape	•
Portrait	•
Mounting (VESA/Number of Points/Pitch mm)	4 / 400mm X 400mm

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

DVI-D	1
Audio RCA R-L	1

ACCESSORIES

Remote Control Transmitter	STD
Power Cord	STD
Battery	STD AA x 2

KEY SPECIFICATIONS

24/7 Operation Certified	•
Limited Manufacturer's Warranty (yrs.)	3
Built in Speakers (W)	7+7
Computer Input - Plug and Play	•
Power Management	•
Cabinet Colour	Black
Fanless	•
Fan Control	0
Temperature Sensor	•
Multi-Screen Function - Videowall Mode (Enlarge Feature)	•
Multi Language OSD	•
Daisychain (Mirror mode)	•
Screen Adjustment	•
Colour Temperature Adjustment	•
Gamma Adjustment	•
Monitor Control Software Support	•
Temperature Control	•

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	9.5
Bezel Size (U/L) mm	9.5 / 15.6
Product Dimensions (W/H/D) mm	1097 / 634 / 46
Product Weight Without Stand (Kg)	15

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	1
DVI-D	1
VGA	1
Audio 3.5mm Jack	1
Audio RCA R-L	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
RS232C OUT	1
LAN Port	1
USB	1