

CE/EMC COMPLIANCE REPORT

for

Sharp NEC Display Solutions, Ltd.

LCD MONITOR

Prepared for : Sharp NEC Display Solutions, Ltd.
Address : 4-28, Mita 1-chome, Minato-ku, Tokyo, 108-0073 Japan

Prepared by : EST Technology Co., Ltd.
Address : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

Tel: 86-769-83081888
Fax: 86-769-83081878


Report Number : ESTE-E2212013
Date of Report : Dec. 05, 2022



TABLE OF CONTENTS

Test Report Declaration	Page
1. GENERAL PRODUCT INFORMATION.....	4
1.1. Product Function	4
1.2. Description of Device (EUT)	4
1.3. Difference between Model Numbers	4
1.4. Independent Operation Modes	4
1.5. Test Supporting System	4
2. TEST SITES.....	5
2.1. Description of Standards and Results.....	5
2.2. Test Facilities	7
2.3. List of Test and Measurement Instruments	8
3. TEST SET-UP AND OPERATION MODES	10
3.1. Principle of Configuration Selection.....	10
3.2. Block Diagram of Test Set-up.....	10
3.3. Test Operation Mode and Test Software.....	11
3.4. Special Accessories and Auxiliary Equipment	11
3.5. Countermeasures to Achieve EMC Compliance.....	12
4. EMISSION TEST RESULTS.....	13
4.1. Conducted Emission at the Mains Terminals Test	13
4.2. Asymmetric Mode Conducted Emissions Test	46
4.3. Radiated Emission Test.....	51
4.4. Radiated Emission Test (above 1GHz)	84
4.5. Harmonic Current Emissions on AC Mains Test.....	117
4.6. Voltage Fluctuations and Flicker on AC Mains Test	121
5. IMMUNITY TEST RESULT	123
5.1. Description of Performance Criteria:	123
5.2. Electrostatic Discharge Immunity Test	124
5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test	126
5.4. Electrical Fast Transient/Burst Immunity Test	129
5.5. Surge Immunity Test.....	131
5.6. Injected Currents Susceptibility Test	133
5.7. Power Frequency Magnetic Field Immunity Test.....	135
5.8. Voltage Dips and Short Interruptions Immunity Test.....	136
6. PHOTOGRAPHS OF TEST SET-UP	138
6.1. Set-up for Conducted Emission at the Mains Terminals Test.....	138
6.2. Set-up for Asymmetric Mode Conducted Emissions Test	139
6.3. Set-up for Radiated Emission Test.....	140
6.4. Set-up for Radiated Emission Test(above 1GHz)	141
6.5. Set-up for Harmonic Current Emissions and Flicker on AC Mains Test.....	142
6.6. Set-up for Electrostatic Discharge Immunity Test	142
6.7. Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test.....	143
6.8. Set-up for Surge Immunity Test.....	143
6.9. Set-up for Electrical Fast Transient/Burst Immunity Test	144
6.10. Set-up for Injected Currents Susceptibility Test	145
6.11. Set-up for Voltage Dips and Short Interruptions Immunity Test.....	146
7. PHOTOGRAPHS OF THE EUT	147

EST Technology Co., Ltd.

Applicant:	Sharp NEC Display Solutions, Ltd.		
Address:	4-28, Mita 1-chome, Minato-ku, Tokyo, 108-0073 Japan		
Manufacturer:	Sharp NEC Display Solutions, Ltd.		
Address:	4-28, Mita 1-chome, Minato-ku, Tokyo, 108-0073 Japan		
Factory 1:	Huizhou KTC Technology Co., Ltd.		
Address:	NO.38 Guangtai Road, Huinan HI-TECH Industrial Park, Huizhou City, Guangdong Province, P.R. China		
Factory 2:	Dynabook Technology (Hangzhou) Inc.		
Address:	2/F, Building2, NO.3, East Gate, Comprehensive bonded Zone, Hangzhou Economic and Technical Development Zone, Zhejiang, China		
E.U.T:	LCD MONITOR		
Model Number:	M861		
Trade Name:	NEC	Serial No:	-----
Date of Receipt:	Aug. 19, 2022	Date of Test:	Nov. 30, ~Dec. 01, 2022
Test Specification:	EN 55032:2015+A11:2020 / BS EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 / BS EN 55035:2017+A11:2020 EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021 / BS EN61000-3-2:2014; BS EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021 / BS EN 61000-3-3:2013; BS EN 61000-3-3:2013+A1:2019+A2:2021 AS/NZS CISPR 32:2015+A1:2020		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		Issue Date: Dec. 05, 2022 	
Prepared by:	Reviewed by:	Approved by:	
 Lena / Assistant	 Bible / Engineer	 Iceman Hu / Manager	
Other Aspects:			
None.			
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products, It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.</i>			

1. GENERAL PRODUCT INFORMATION

1.1. Product Function

Refer to Technical Construction Form and User Manual.

1.2. Description of Device (EUT)

Description	:	LCD MONITOR
Model No.	:	M861
System Input Voltage	:	AC 100-240V, 50/60Hz, 6.1-2.5A
Output	:	USB-A: 5V/0.5A; USB-SERVICE: 5V/2A

1.3. Difference between Model Numbers

None.

1.4. Independent Operation Modes

The basic operation modes are:

1.4.1. HDMI 1 Mode (3840*2160)

1.4.2. HDMI 2 Mode (3840*2160)

1.4.3. DP1 Mode (3840*2160)

1.4.4. DP2 Mode (3840*2160)

1.4.5. LAN 1 Mode

1.4.6. LAN 2 Mode

1.4.7. COMPUTE MODULE

1.4.8. OPTION Mode

1.5. Test Supporting System

2. TEST SITES

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION(EN 55032:2015+A11:2020)			
Description of Test Item	Standard	Limits	Results
Conducted emissions (AC mains power ports)	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 4.02dB at 0.39MHz	
Asymmetric mode conducted emissions	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 18.42dB at 1.71MHz	
Conducted differential voltage emissions	EN 55032:2015+A11:2020	Class B	N/A
		More than*** dB below the limit line.	
Radiated Emission	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 2.49dB at 143.48MHz	
Radiated Emission Test (above 1GHz)	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 2.04dB at 2970MHz	
Harmonic current emissions	EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021	Class D	PASS
Voltage fluctuations & flicker	EN 61000-3-3:2013; EN 61000-3-3:2013+ A1:2019+A2:2021	Section 4.6	PASS

IMMUNITY (EN 55035:2017+A11:2020)				
Description of Test Item	Basic Standard	Performance Criteria	Observation Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	B	PASS
Radio-frequency,Continuous radiated disturbance	EN 61000-4-3:2006+A1:2008+A2:2010	A	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4:2012	B	B	PASS
Surge (Input a.c. power port)	EN 61000-4-5:2014	B	B	PASS
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6:2014	A	A	PASS
Power frequency magnetic field	EN 61000-4-8:2010	A	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11:2004	B	B	PASS
Voltage dips, 30% reduction		C	C	PASS
Voltage interruptions		C	C	PASS
N/A is an abbreviation for Not Applicable.				

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3.List of Test and Measurement Instruments

2.3.1. For conducted emission at the mains terminals test (2# conduction)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	June 13,22	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E048	June 13,22	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.2. For asymmetric mode conducted emissions test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	June 13,22	1 Year
ISN	Teseq	T8	EST-E041	June 13,22	1 Year
Current Transformer	SCHWARZBECK	SW9605	EST-E045	June 13,22	1 Year
Voltage Probe	SCHWARZBECK	TK9420	EST-E046	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.3. For radiated emission test (10m radiation)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E105	June 13,22	1 Year
EMI Test Receiver	Rohde & Schwarz	ESR3	EST-E126	June 13,22	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E052	June 13,22	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E127	June 13,22	1 Year
Signal Amplifier	Agilent	310N	EST-E010	June 13,22	1 Year
Signal Amplifier	Agilent	310N	EST-E068	June 13,22	1 Year
Test Software	EZ	EZ-EMC	EST10m-03A2	N/A	N/A

2.3.4. For radiated emission test (above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	June 13,22	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	EST-E031	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.5. For harmonic current emissions and voltage fluctuations/flicker test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Analyzer	California Instruments	3001IX-208-CTS	EST-E011	June 13,22	1 Year
Voltage Source	California Instruments	3001IX-208	EST-E012	June 13,22	1 Year
Test Software	California Instruments	CTS	N/A	N/A	N/A

2.3.6. For electrostatic discharge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
ESD Generator	Teseq	NSG437	EST-E073	June 13,22	1 Year

2.3.7. For electrical fast transient/burst immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EFT Generator	EMC PARTNER	TRANSIENT 2000	EST-E074	June 13,22	1 Year
Capacitive Coupling Clamp	HAEFELY	IP4A	EST-E040	June 13,22	1 Year

2.3.8. Radio Frequency Electromagnetic Field Immunity (R/S) Test\

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Agilent	N5181A	EST-E060	June 13,22	1 Year
Power Amplifier	SKET	HAP801000M-250W	EST-E061	N/A	N/A
Power Amplifier	SKET	HAP0103G-75W	EST-E062	N/A	N/A
Power Amplifier	SKET	HAP0306G-50W	EST-E063	N/A	N/A
Power Meter	Agilent	E4419B	EST-E064	June 13,22	1 Year
Power sensor	Agilent	E9301A	EST-E065	June 13,22	1 Year
Power sensor	HP	E9301A	EST-E066	June 13,22	1 Year
Antenna	Schwarzbeck	STLP 9129	EST-E059	N/A	N/A
E-Field Probe	Narda	EP-601	EST-E067	June 13,22	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 13,22	1 Year
Test Software	SKET	EMC-S	V1.2.0.48	N/A	N/A

2.3.9. For surge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Surge Controller	HAEFELY	PSURGE8000	EST-E015	June 13,22	1 Year
Surge Impulse Module	HAEFELY	PIM100	EST-E016	June 13,22	1 Year
Surge Coupling Network	HAEFELY	PCD100	EST-E017	June 13,22	1 Year

2.3.10.For injected currents susceptibility test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Rohde &Schwarz	SMB100A	EST-E025	June 13,22	1 Year
Power Amplifier	FRANKONIA	CIT-10	EST-E021	N/A	N/A
Power Meter	Rohde &Schwarz	NRVS	EST-E027	June 13,22	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 13,22	1 Year
CDN	FRANKONIA	CDN-M2+M3	EST-E022	June 13,22	1 Year
EM-Clamp	FRANKONIA	EMCL-20	EST-E042	June 13,22	1 Year
Test Software	SKET	EMC-S	V1.2.0.80	N/A	N/A

2.3.11.For power frequency magnetic field immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic Field Tester	HAEFELY	MFS 100	EST-E018	June 13,22	1 Year

2.3.12.For voltage dips and short interruptions immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
DIPS Tester	EMC PARTNER	TRANSIENT 2000	EST-E074	June 13,22	1 Year

Note: All calibration reports of the equipment were provided by LiSai calibration and Testing

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection


Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

Immunity: The equipment under test (EUT) was configured to the representative operating mode and conditions.


3.2. Block Diagram of Test Set-up

System Diagram of Connections Between EUT and Simulators

3.2.1. For emission test

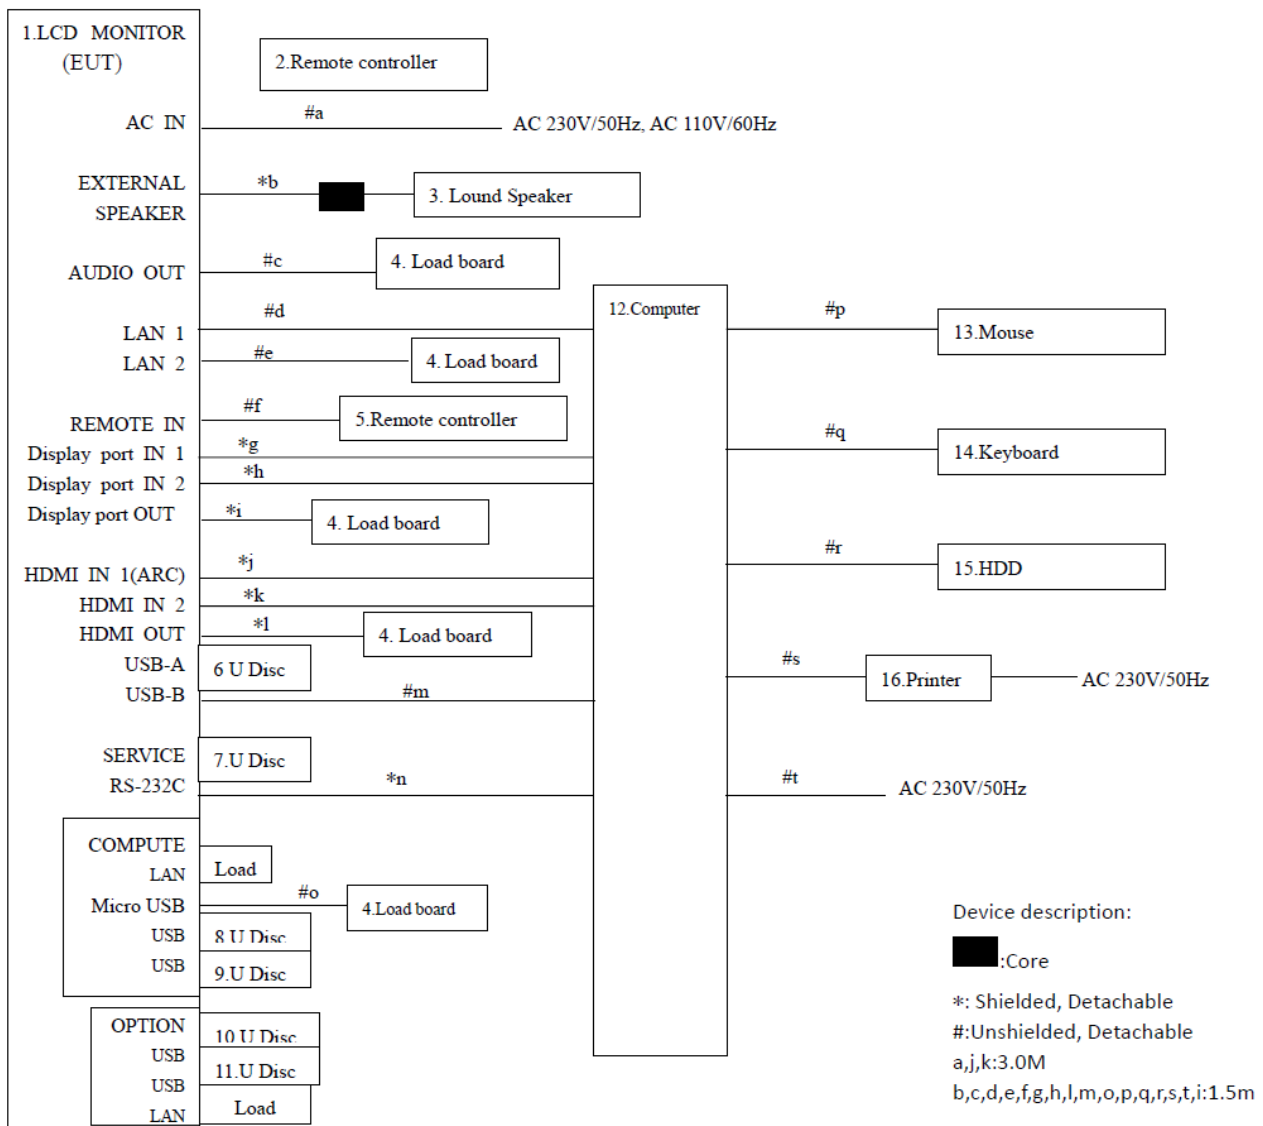

3.2.2. For immunity test

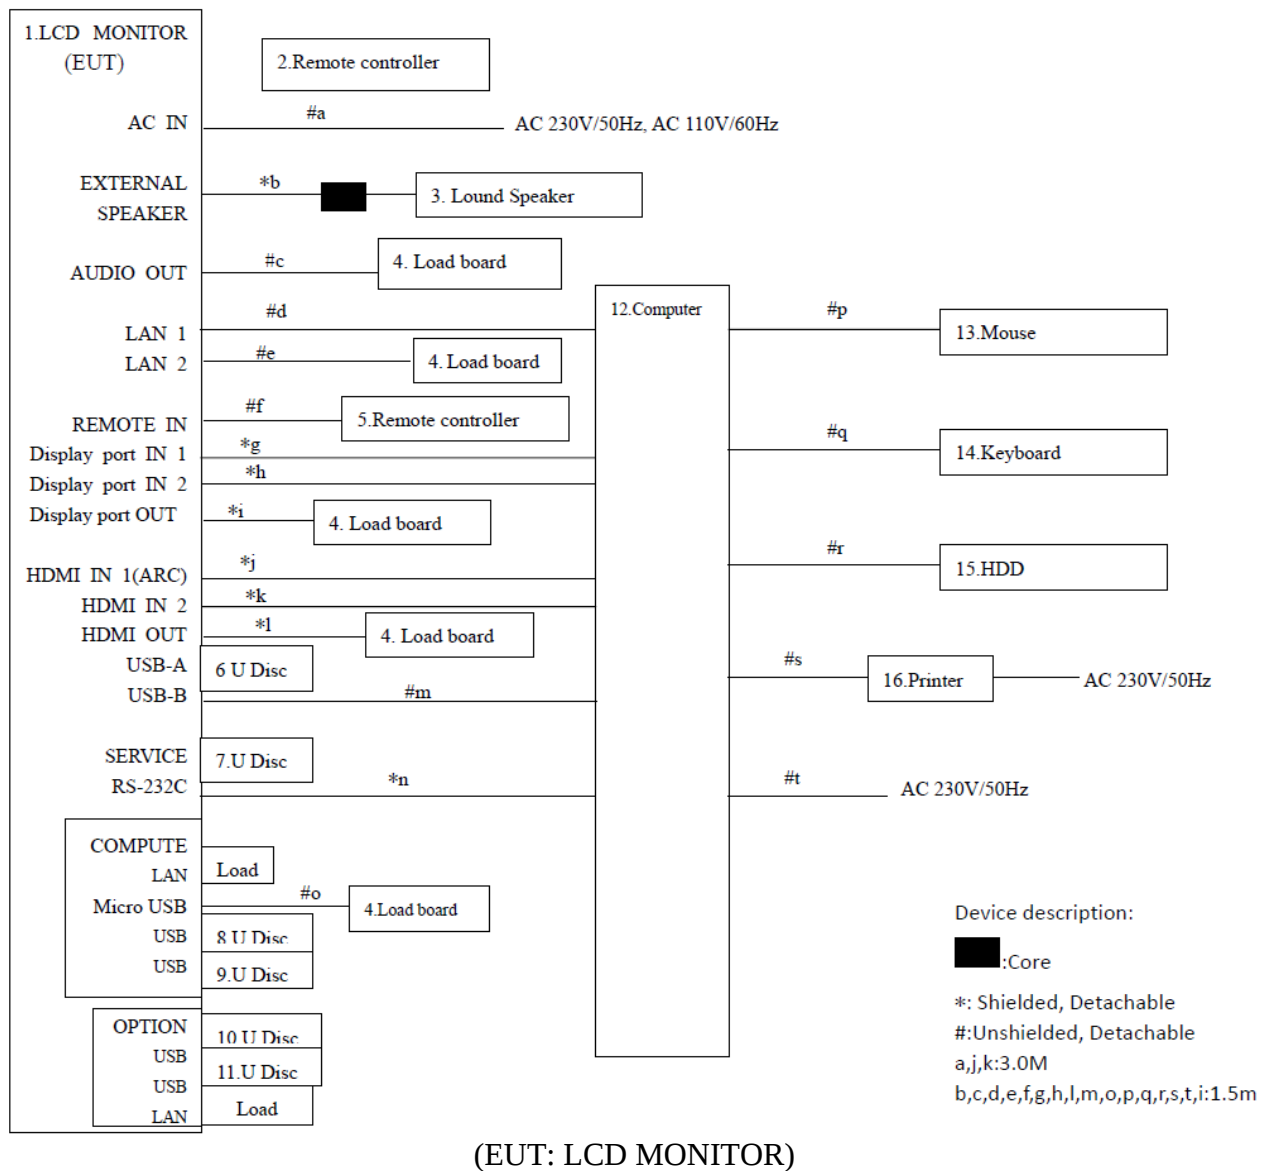

3.3. Test Operation Mode and Test Software

Refer to Test Setup in clause 4 & 5.

3.4. Special Accessories and Auxiliary Equipment

3.4.1.DELL PC (4K)

M / N : Precision Tower 3620
S / N : 23TH6H2
Manufacturer : DELL

3.4.2.Keyboard

M / N : L100
S / N : CN-0RH656-65890-01M-070T

Manufacturer : Dell
Data Cable : Shielded, Undetachable, 1.8m

3.4.3.Mouse

M / N : MOL5VO
S / N : JOQ03RNT
Manufacturer : Dell
Data Cable : Shielded, Undetachable, 1.5m

3.4.4.U Disc

M / N : SDCZ7-4096
S / N : BH0701AGOB
Manufacturer : SanDisk

3.4.5.HDD

M / N : iPod/A1238
S / N : 8K044D2Z9ZU
Manufacturer : Apple

3.4.6.Printer

M / N : HP LaserJet 1020 Plus
Manufacturer : HP
AC Line : Unshielded, Detachable 1.2m
USB Line : Unshielded, Detachable 1.2m

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 0.15~30MHz
Test Site : 2# Conduction Shielded Room
Limits : EN 55032:2015+A11:2020 Class B


Test Setup

Date of test : Nov. 30, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode

The bandwidth of the test receiver was set at 9kHz.

The frequency range from 150 kHz to 30 MHz was investigated.

The test data of the worst case condition(s) was reported on the following page.

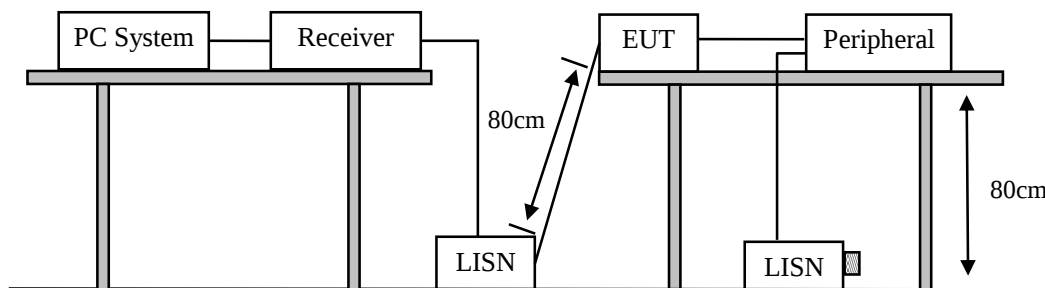


Note: Test uncertainty: $\pm 3.42\text{dB}$ at a level of confidence of 95%.(2#CE)

Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

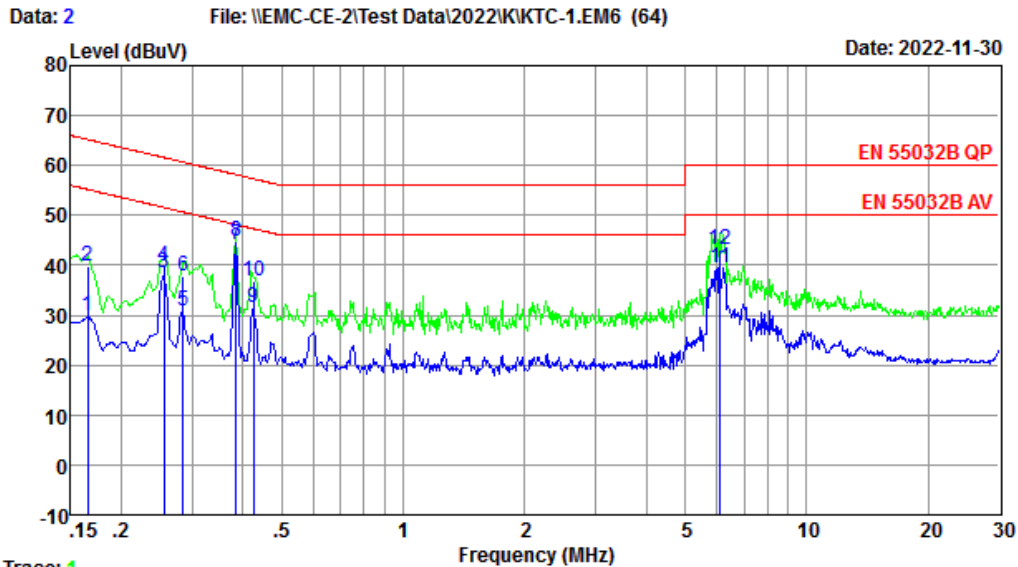

Trace: 1

Site no : 2#CE Shield Room Data no. : 2

Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL

Limit : EN 55032B QP

Engineer : DCY

EUT : LCD MONITOR

Power : AC 110V/60Hz

M/N : M861

Test Mode : COMPUTE MODULE

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.71	9.69	10.42	29.82	55.21	25.39	Average
2	0.17	9.71	9.69	20.32	39.72	65.21	25.49	QP
3	0.25	9.53	9.92	19.06	38.51	51.60	13.09	Average
4	0.25	9.53	9.92	20.32	39.77	61.60	21.83	QP
5	0.28	9.59	9.92	11.34	30.85	50.68	19.83	Average
6	0.28	9.59	9.92	18.34	37.85	60.68	22.83	QP
7	0.39	9.64	9.92	24.59	44.15	48.17	4.02	Average
8	0.39	9.64	9.92	25.38	44.94	58.17	13.23	QP
9	0.43	9.62	9.92	11.96	31.50	47.33	15.83	Average
10	0.43	9.62	9.92	17.32	36.86	57.33	20.47	QP
11	6.12	9.67	10.03	19.79	39.49	50.00	10.51	Average
12	6.12	9.67	10.03	23.34	43.04	60.00	16.96	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.



Data: 4

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

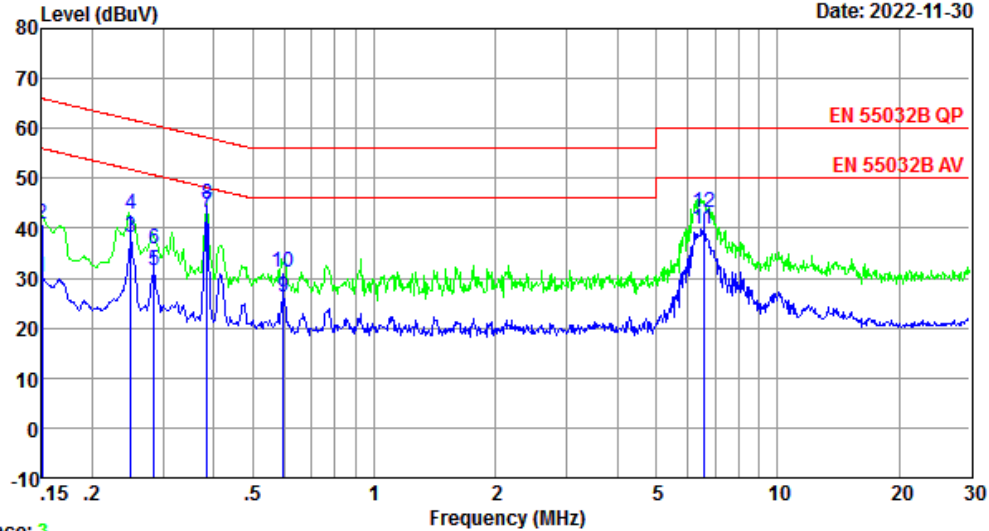


Trace: 3

Site no : 2#CE Shield Room Data no. : 4
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : EN 55032B QP
 Engineer : DCY
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : M861
 Test Mode : COMPUTE MODULE

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	9.66	9.69	10.95	30.30	56.00	25.70	Average
2	0.15	9.66	9.69	21.35	40.70	66.00	25.30	QP
3	0.25	9.64	9.92	18.44	38.00	51.78	13.78	Average
4	0.25	9.64	9.92	23.33	42.89	61.78	18.89	QP
5	0.28	9.64	9.92	12.00	31.56	50.68	19.12	Average
6	0.28	9.64	9.92	16.14	35.70	60.68	24.98	QP
7	0.39	9.70	9.92	23.45	43.07	48.17	5.10	Average
8	0.39	9.70	9.92	25.13	44.75	58.17	13.42	QP
9	0.59	9.76	9.92	6.61	26.29	46.00	19.71	Average
10	0.59	9.76	9.92	11.65	31.33	56.00	24.67	QP
11	6.56	9.74	10.03	20.18	39.95	50.00	10.05	Average
12	6.56	9.74	10.03	23.31	43.08	60.00	16.92	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

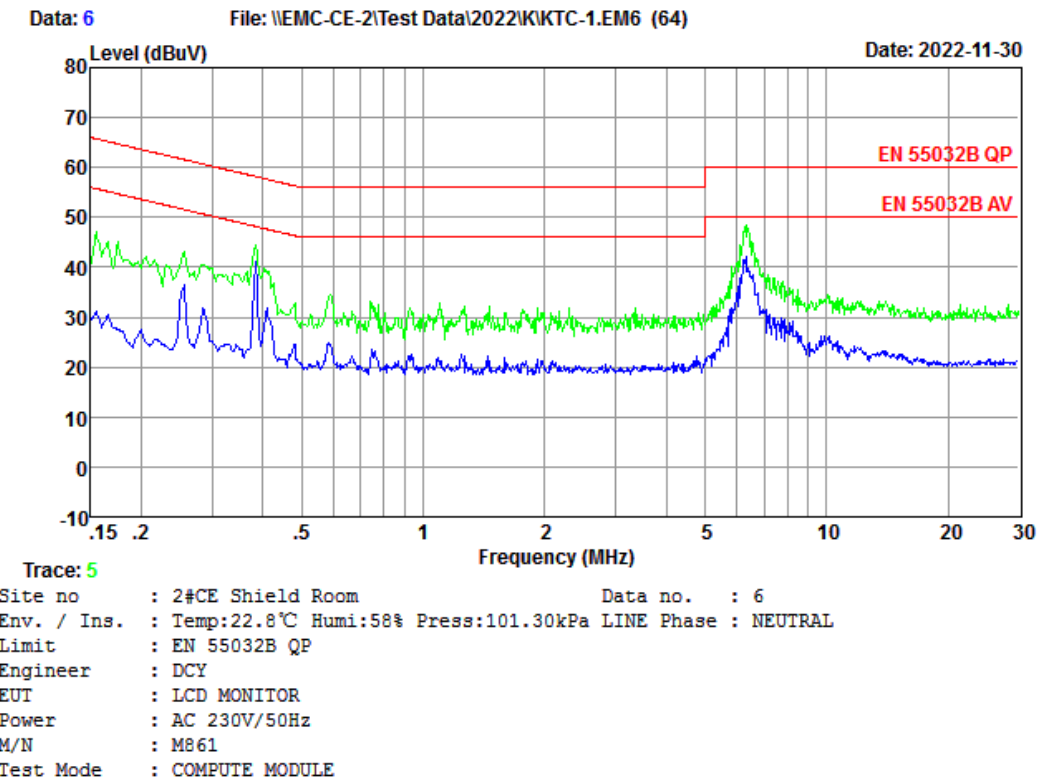

Data: 8

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

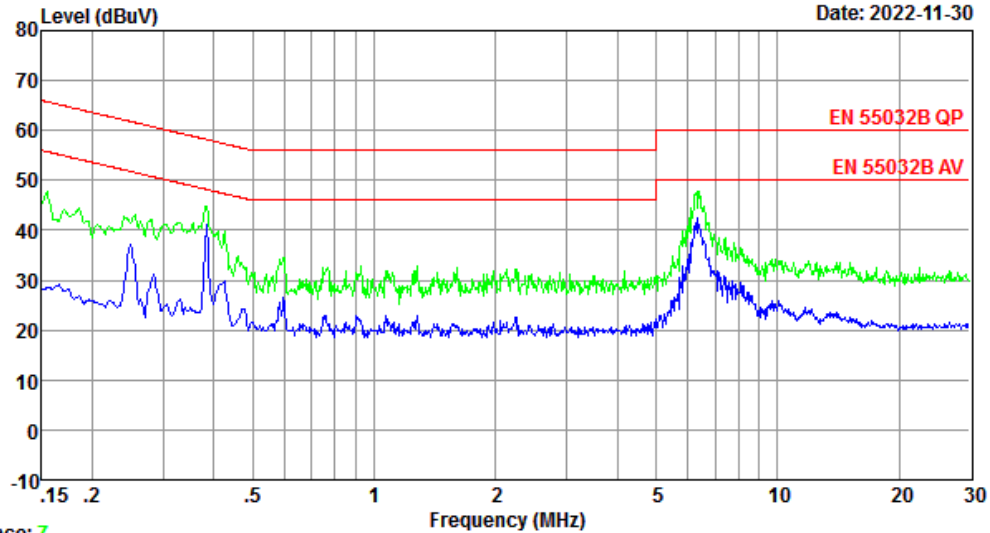


Trace: 7
Site no : 2#CE Shield Room Data no. : 8
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : COMPUTE MODULE

Data: 10

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

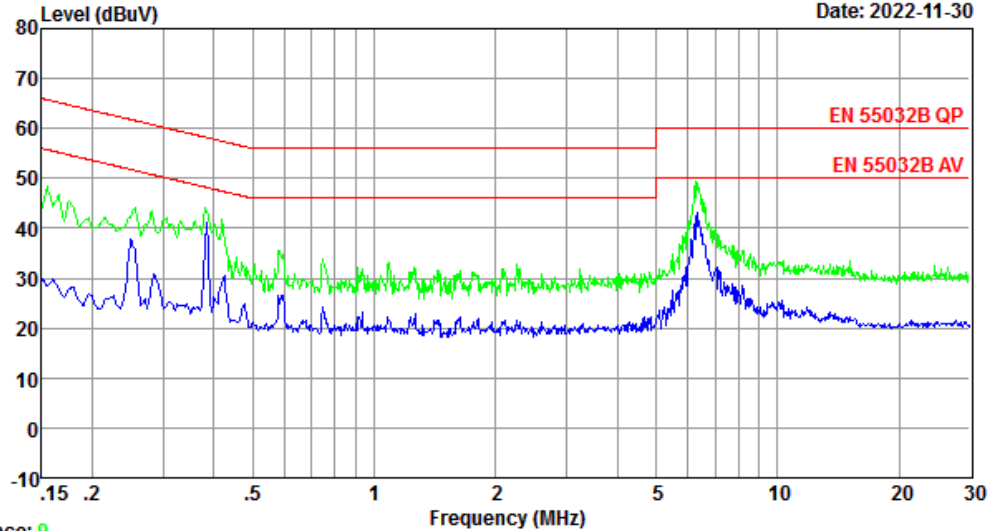


Trace: 9

Site no : 2#CE Shield Room Data no. : 10
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN1 Mode

Data: 12

File: \\EMC-CE-2\\Test Data\\2022\\K\\KTC-1.EM6 (64)

Date: 2022-11-30

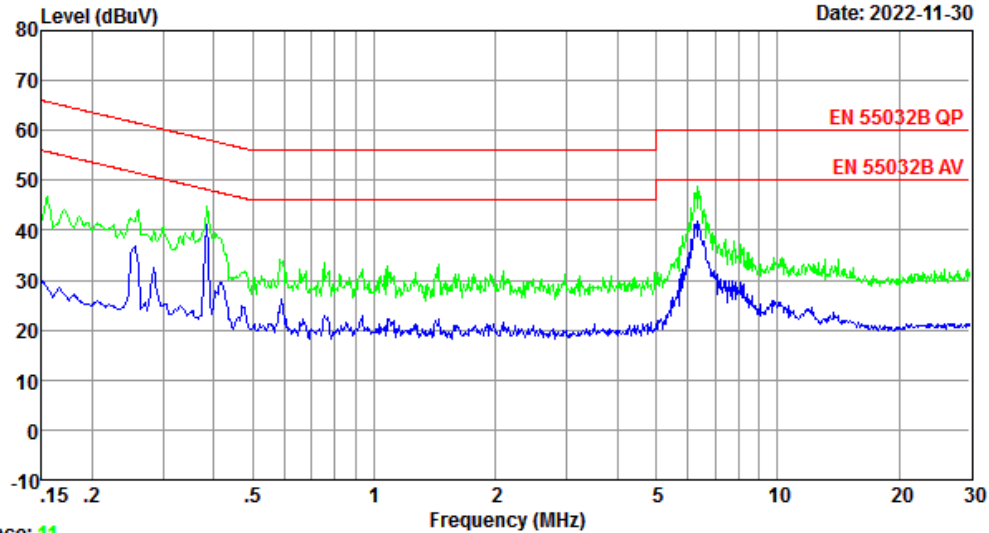


Trace: 11

Site no : 2#CE Shield Room Data no. : 12
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN1 Mode

Data: 14


File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

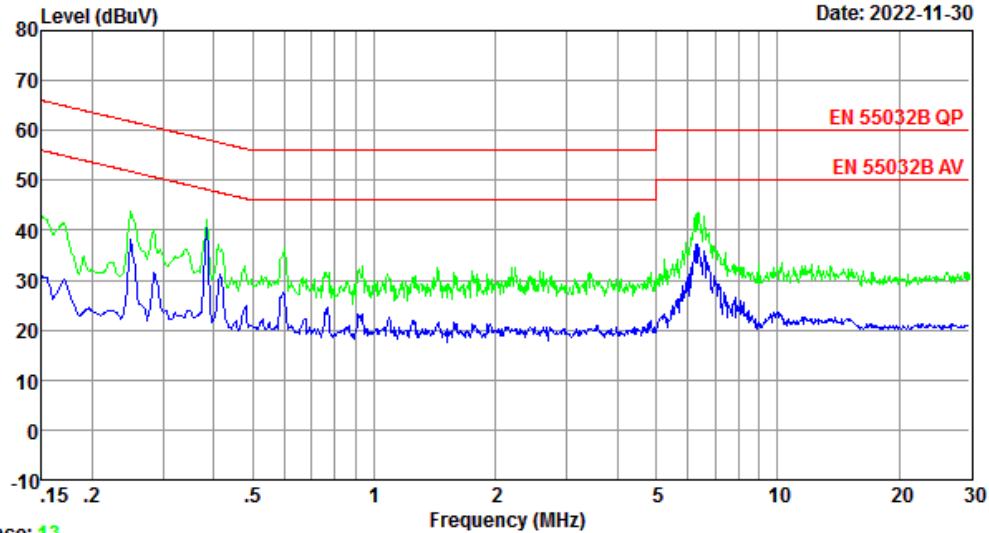

Trace: 13


Site no : 2#CE Shield Room Data no. : 14
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : LAN1 Mode

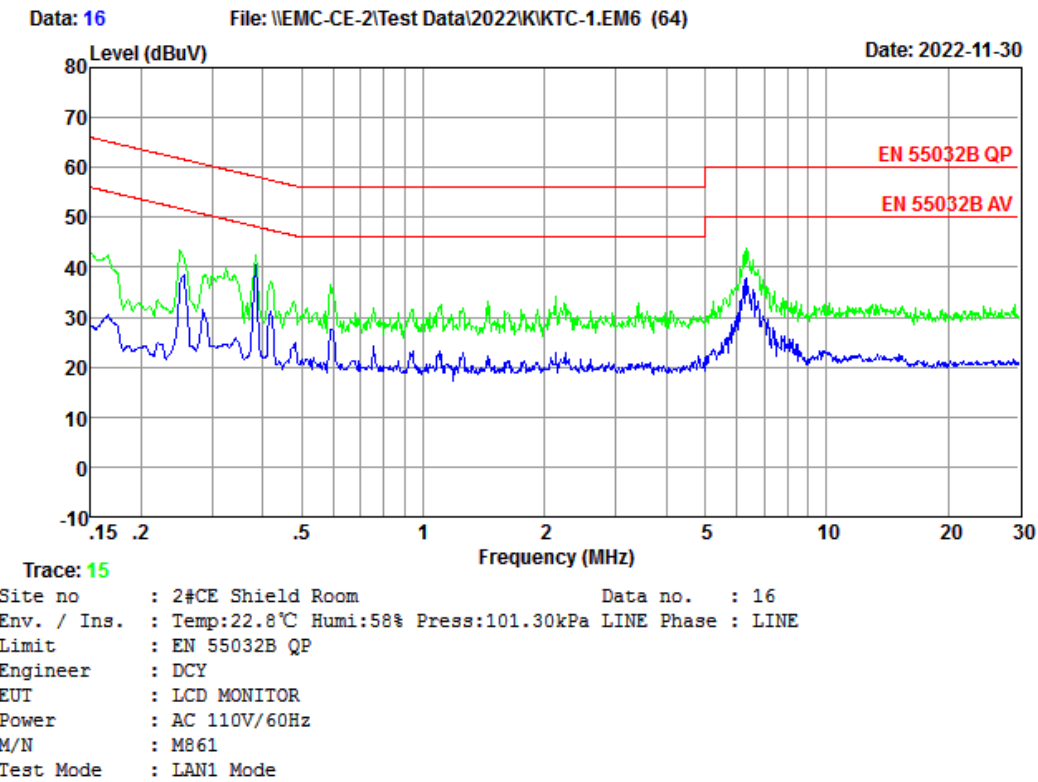

Data: 18

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

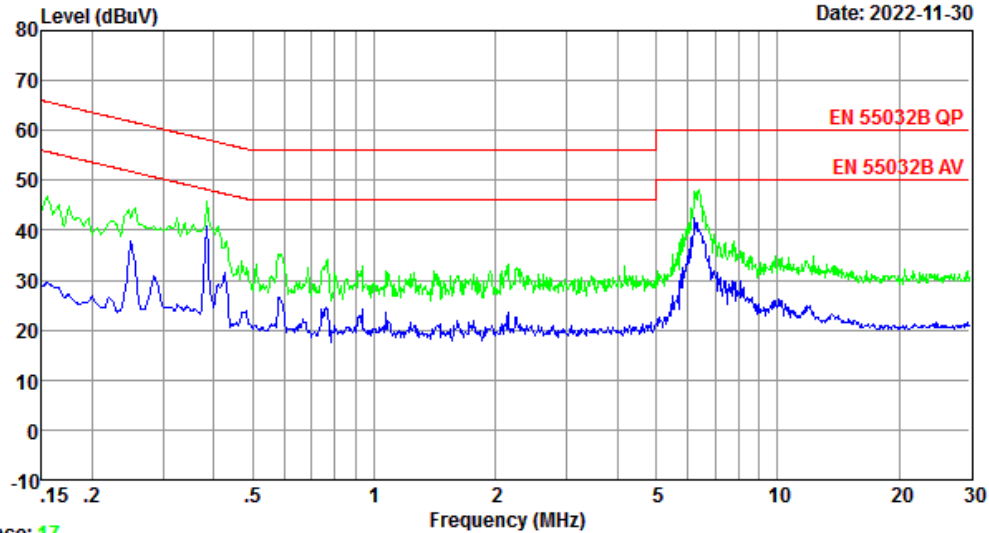


Trace: 17

Site no : 2#CE Shield Room Data no. : 18
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN2 Mode

Data: 20

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

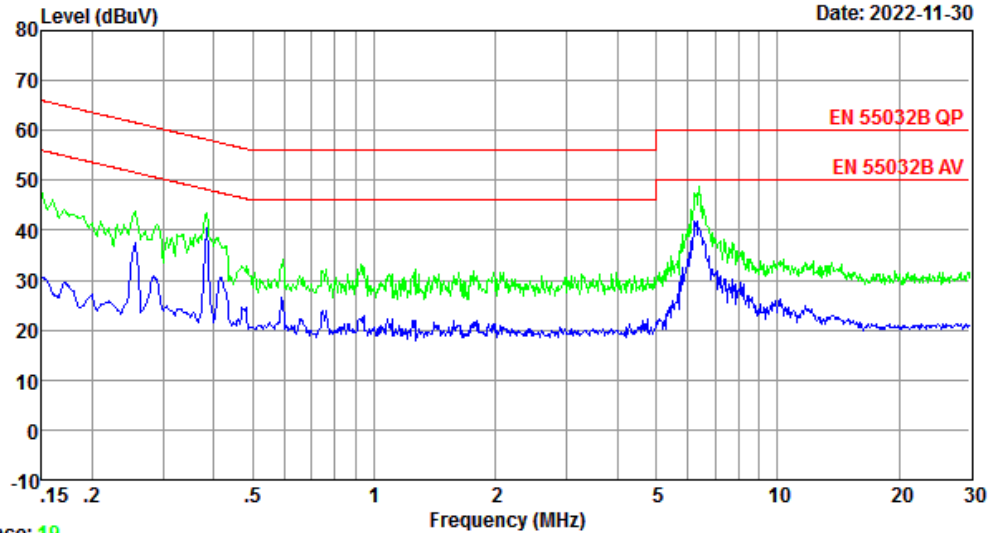


Trace: 19

Site no : 2#CE Shield Room Data no. : 20
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN2 Mode

Data: 22

File: \\EMC-CE-2\\Test Data\\2022\\K\\KTC-1.EM6 (64)

Date: 2022-11-30

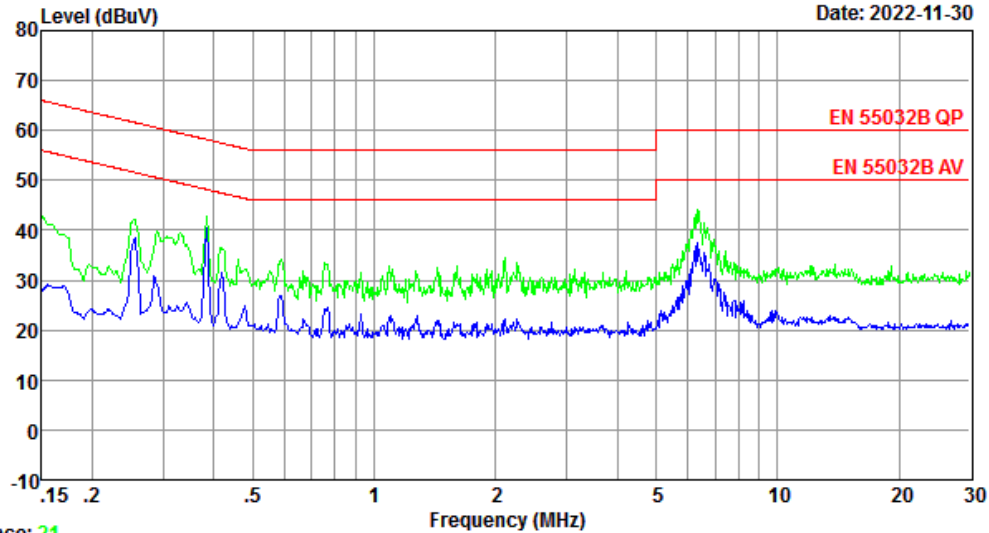


Trace: 21

Site no : 2#CE Shield Room Data no. : 22
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : LAN2 Mode

Data: 24

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

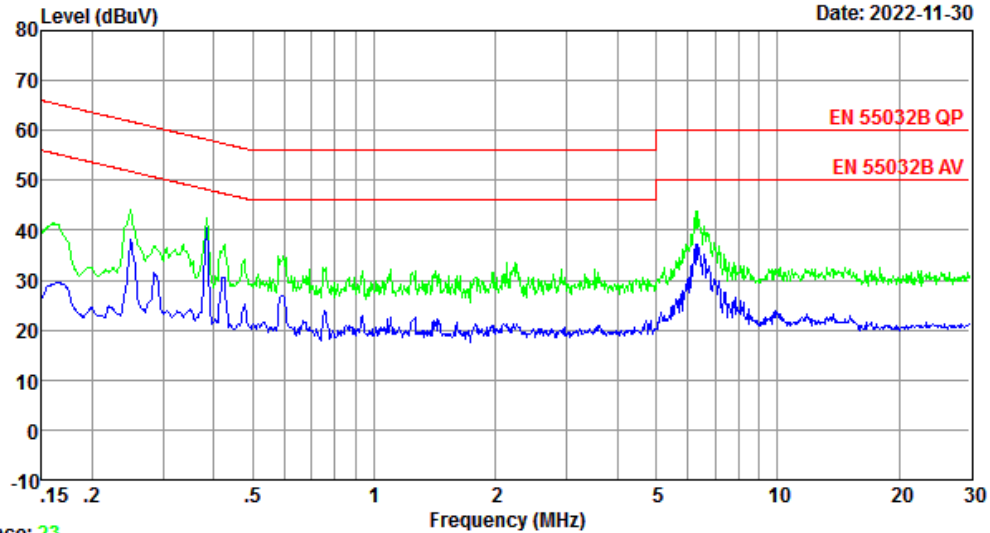


Trace: 23

Site no : 2#CE Shield Room Data no. : 24
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : LAN2 Mode

Data: 26

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

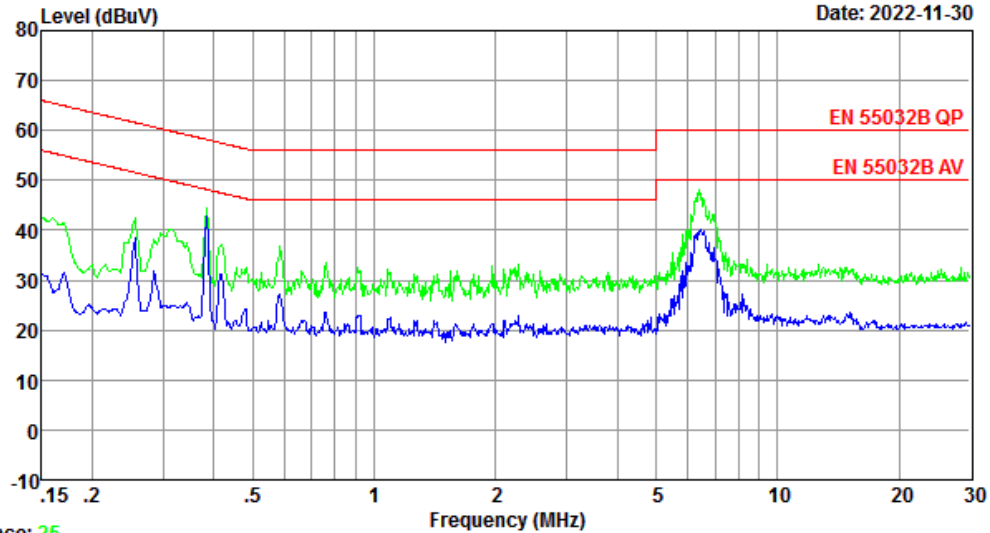


Trace: 25

Site no : 2#CE Shield Room Data no. : 26
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : OPTION Mode

Data: 28

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

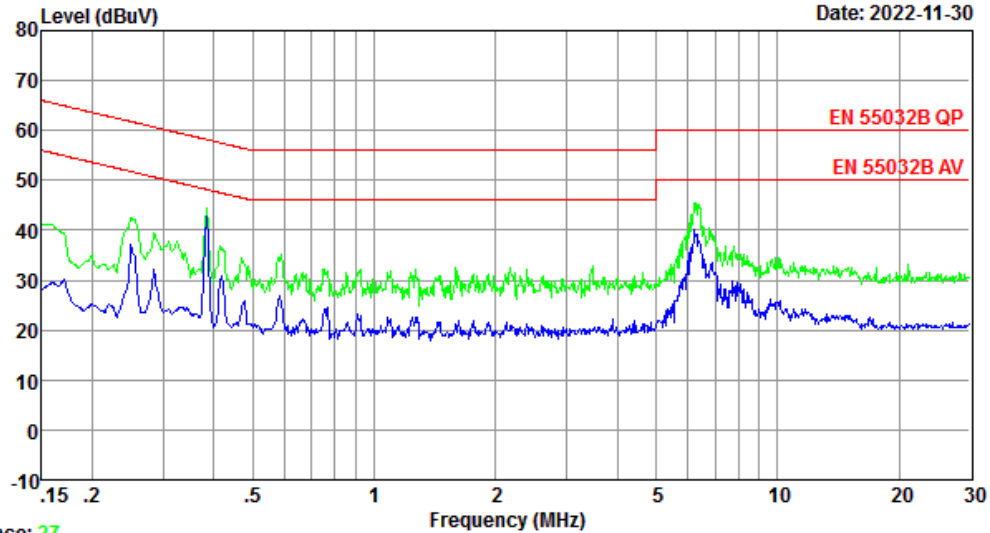


Trace: 27

Site no : 2#CE Shield Room Data no. : 28
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : OPTION Mode

Data: 30

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

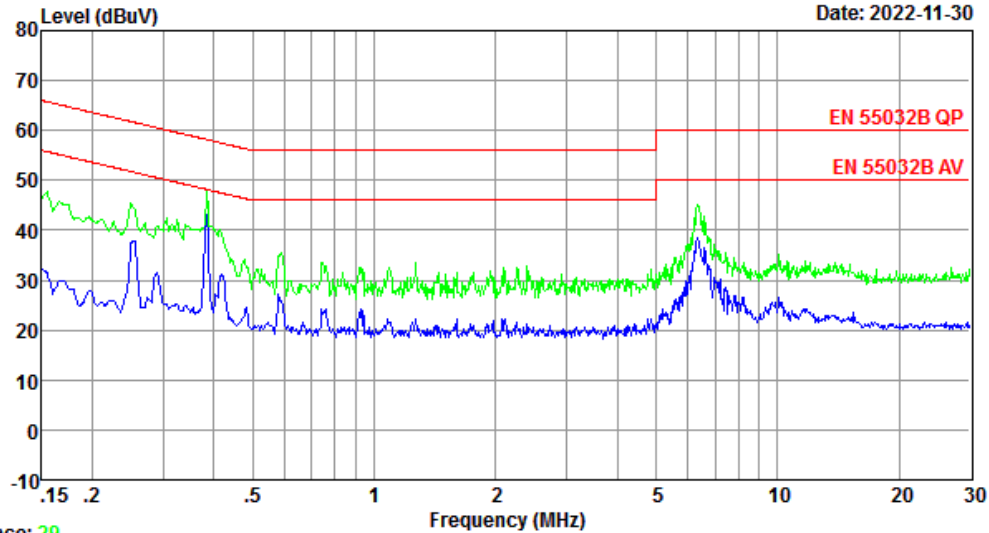


Trace: 29

Site no : 2#CE Shield Room Data no. : 30
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : OPTION Mode

Data: 32

File: \\EMC-CE-2\\Test Data\\2022\\K\\KTC-1.EM6 (64)

Date: 2022-11-30

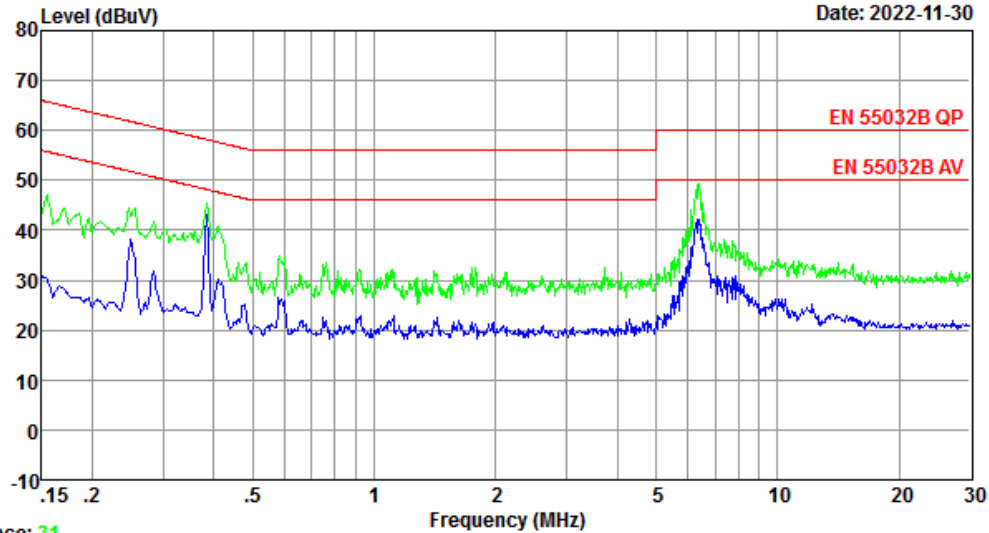


Trace: 31

Site no : 2#CE Shield Room Data no. : 32
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : OPTION Mode

Data: 34

File: \\EMC-CE-2\\Test Data\\2022\\K\\KTC-1.EM6 (64)

Date: 2022-11-30

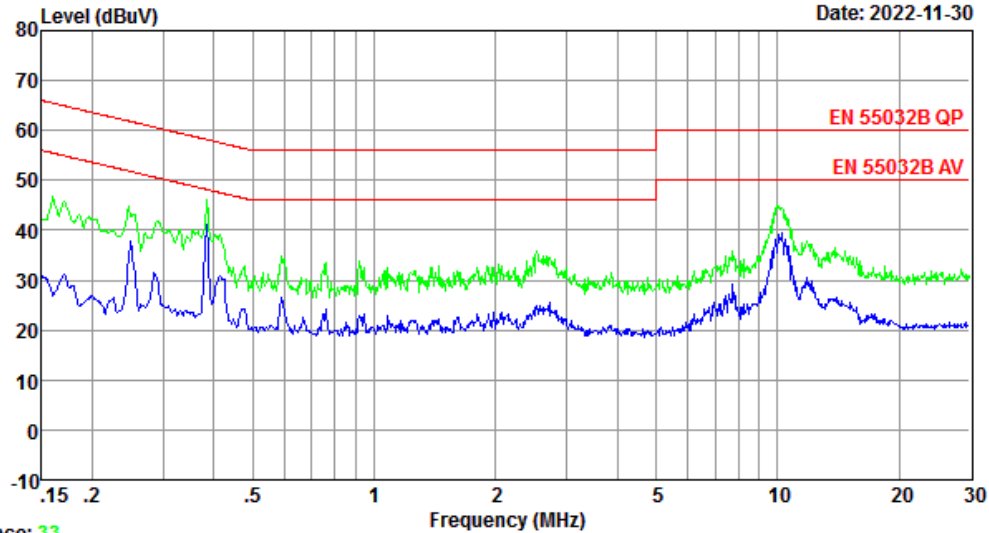


Trace: 33

Site no : 2#CE Shield Room Data no. : 34
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI1 Mode(3840*2160)

Data: 36


File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)


Date: 2022-11-30

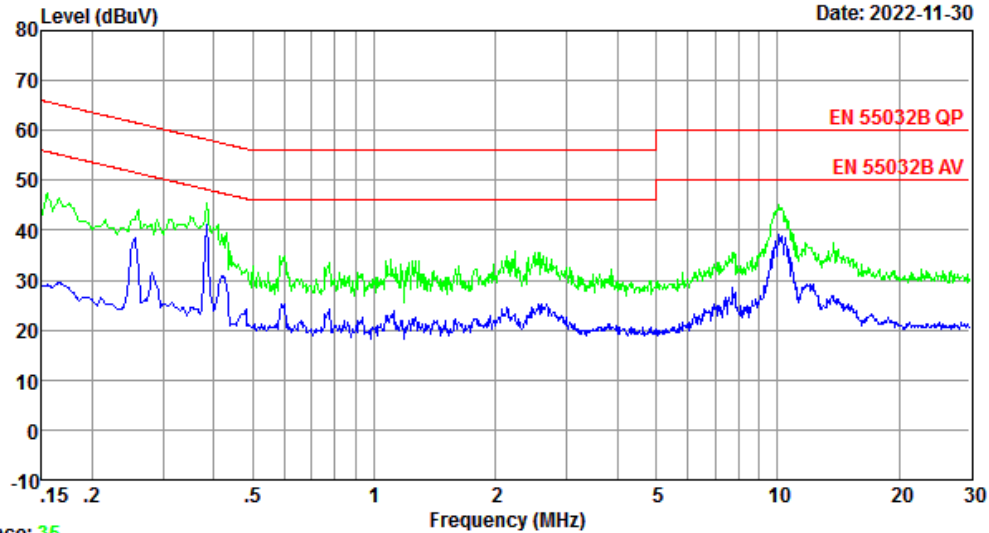

Trace: 35

Site no : 2#CE Shield Room Data no. : 36
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI1 Mode(3840*2160)

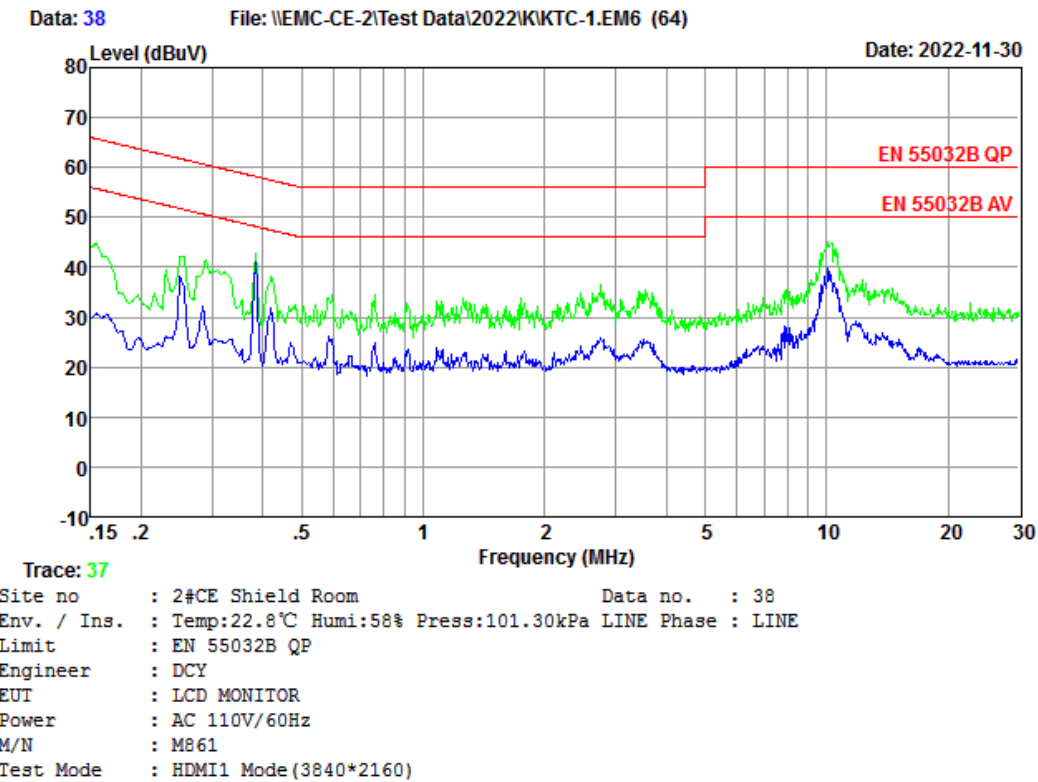


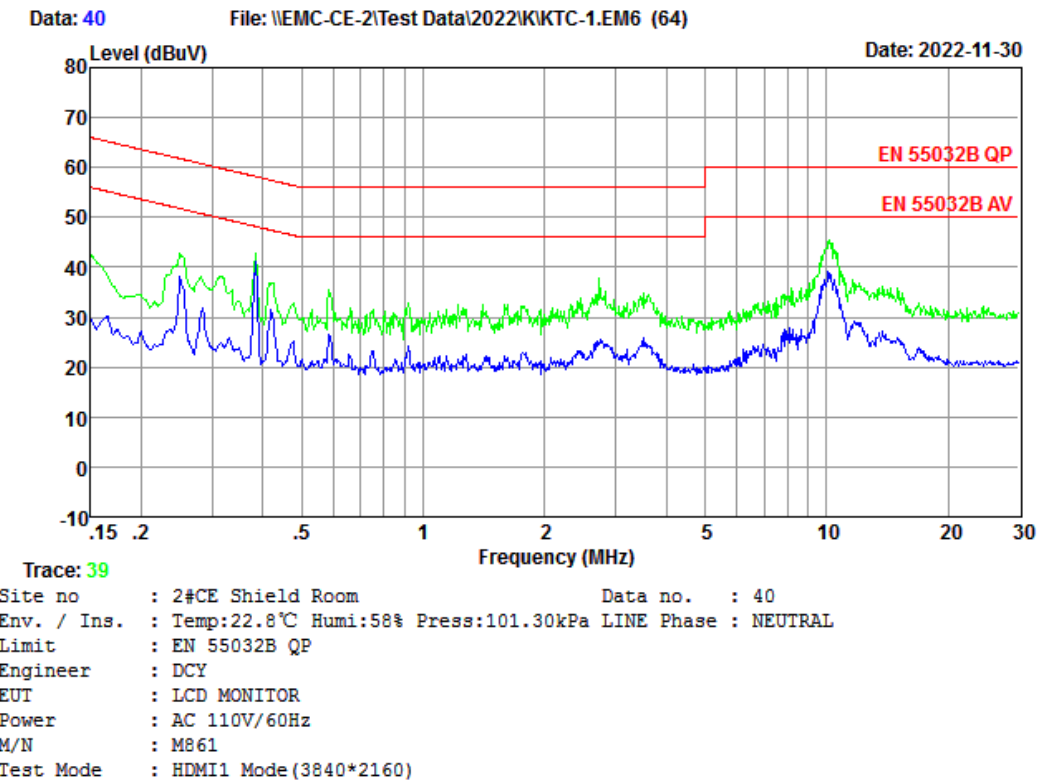

Data: 42


File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

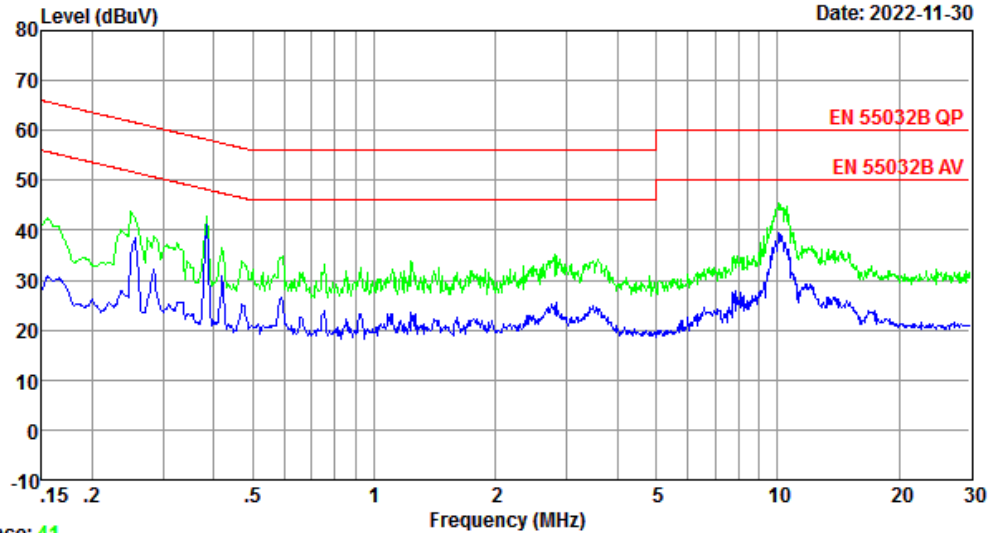

Trace: 41


Site no : 2#CE Shield Room Data no. : 42
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : HDMI2 Mode(3840*2160)

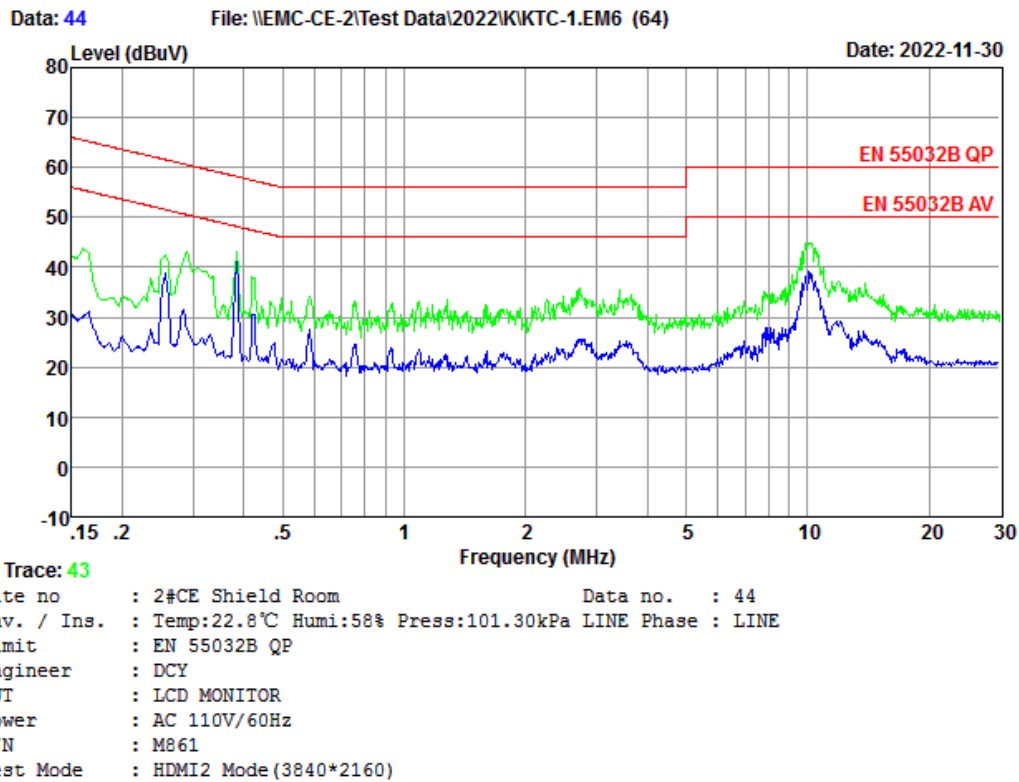

Data: 46

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

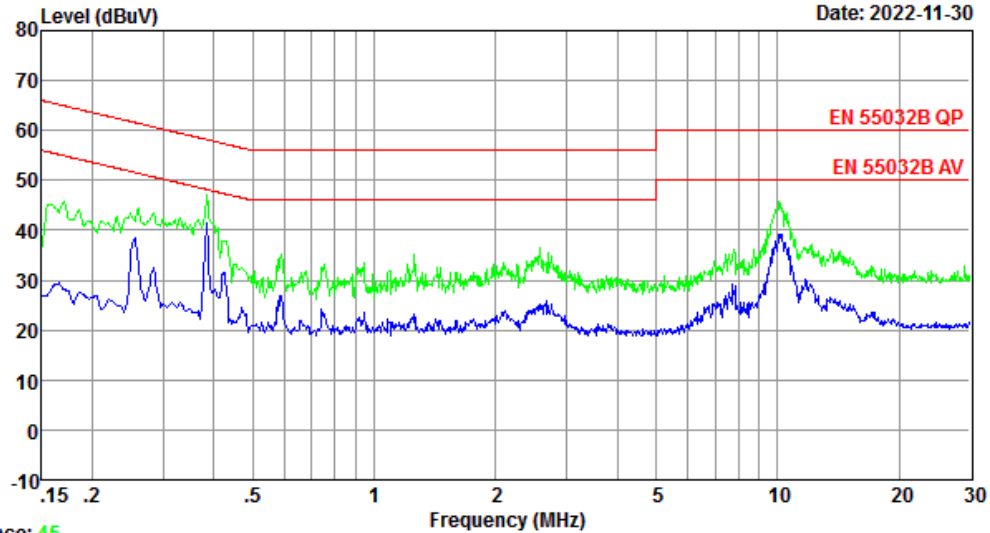


Trace: 45

Site no : 2#CE Shield Room Data no. : 46
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI2 Mode(3840*2160)

Data: 48

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

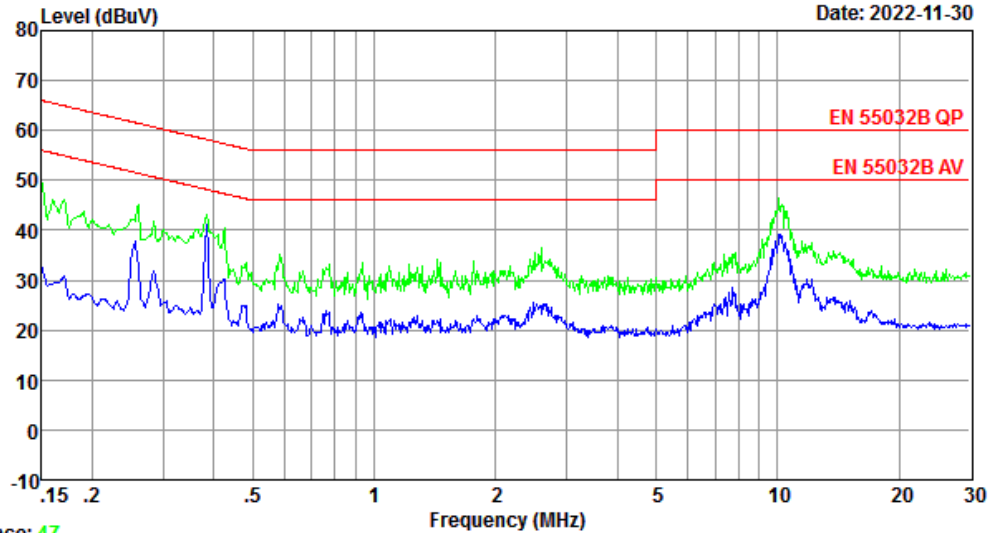


Trace: 47

Site no : 2#CE Shield Room Data no. : 48
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI2 Mode(3840*2160)

Data: 50

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

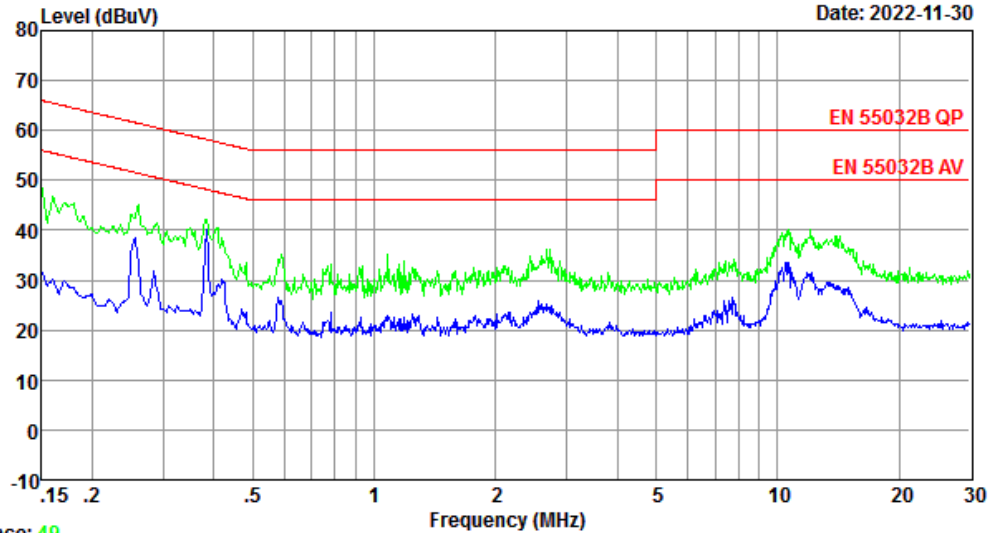


Trace: 49

Site no : 2#CE Shield Room Data no. : 50
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 52

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

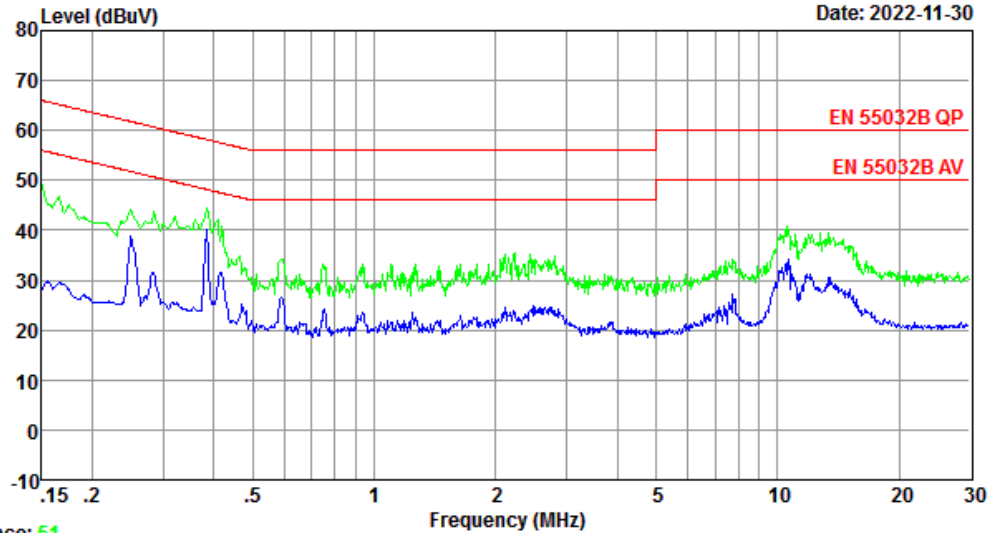


Trace: 51

Site no : 2#CE Shield Room Data no. : 52
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 54

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

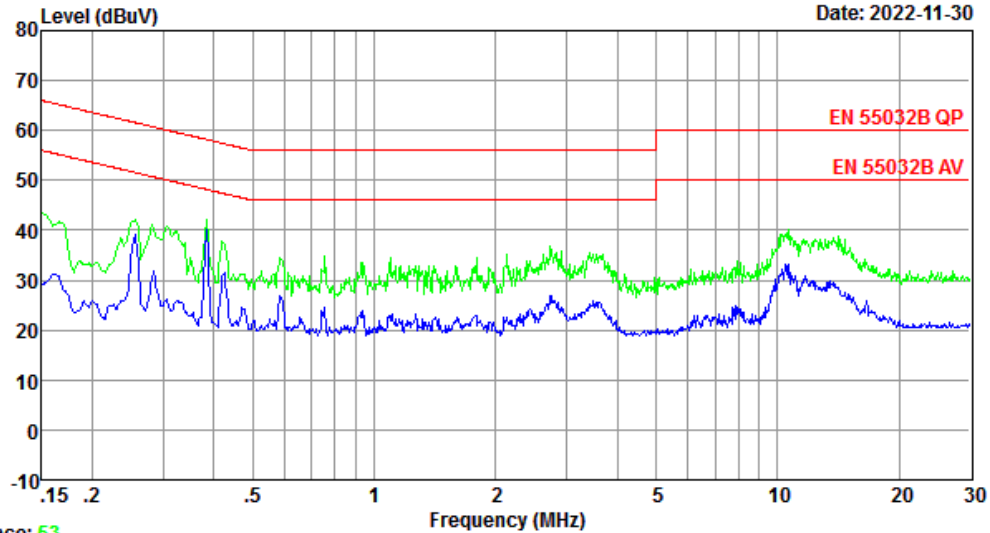


Trace: 53

Site no : 2#CE Shield Room Data no. : 54
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 56

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

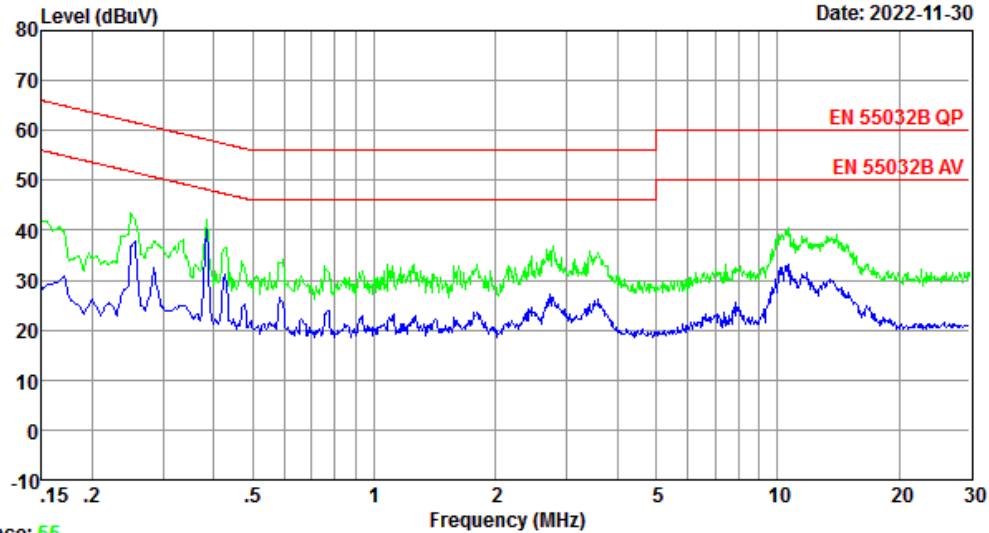


Trace: 55

Site no : 2#CE Shield Room Data no. : 56
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 58


File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

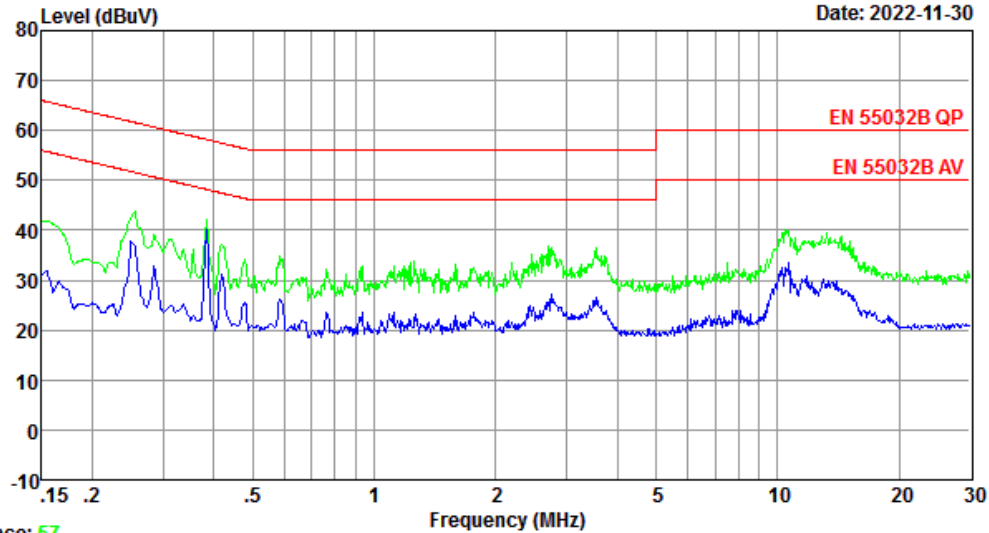

Trace: 57


Site no : 2#CE Shield Room Data no. : 58
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)

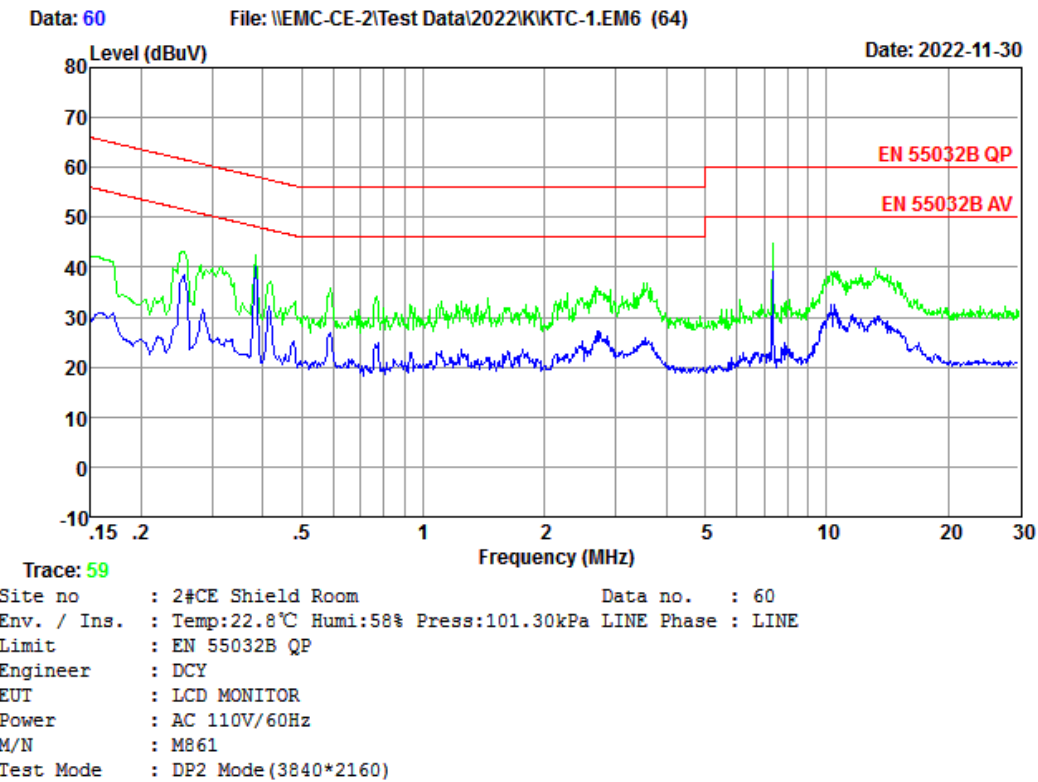

Data: 62


File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (64)

Date: 2022-11-30

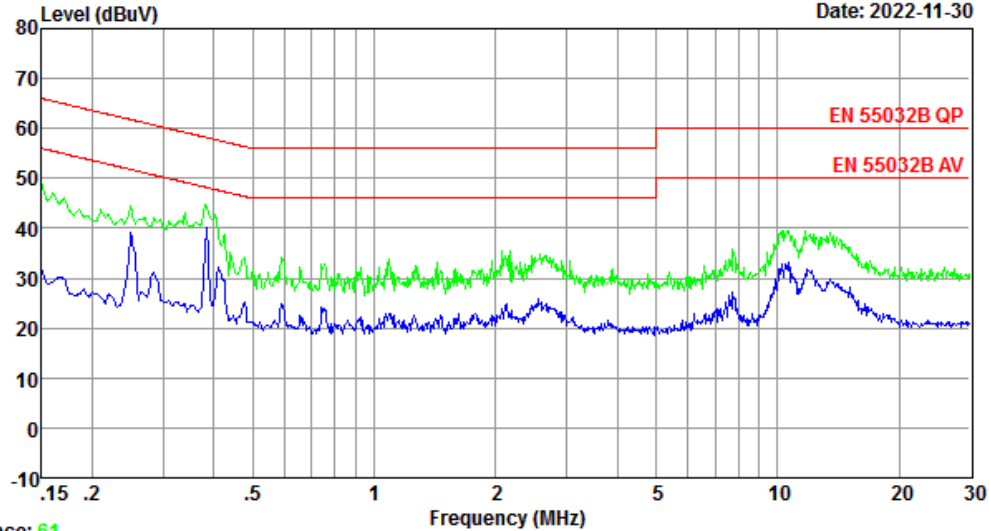

Trace: 61

Site no : 2#CE Shield Room Data no. : 62
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)

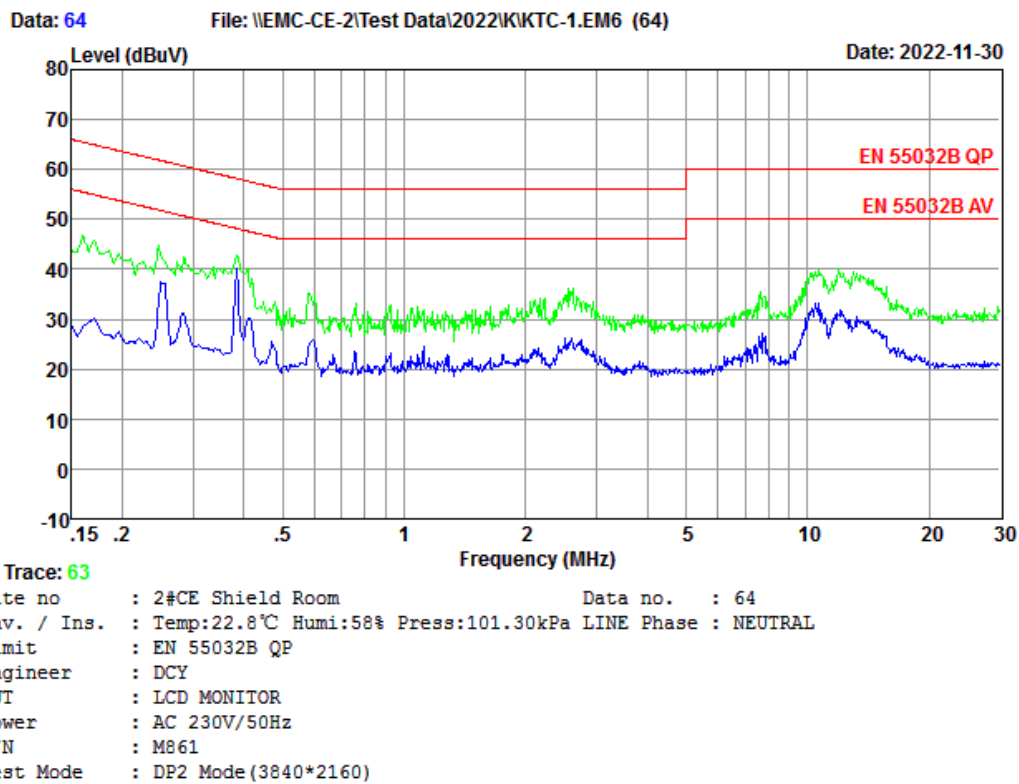

4.2. Asymmetric Mode Conducted Emissions Test

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 0.15~30MHz
Test Site : Shielded Room
Limits : EN 55032:2015+A11:2020

Test Setup

Date of test : Nov. 30, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : LAN 1 Mode, LAN 2 Mode

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

The test data of the worst case condition(s) was reported on the following page.

Note: Test uncertainty: $\pm 4.32\text{dB}$ at a level of confidence of 95%.

Test Data


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 354

File: \\EMC-CE-2\Test Data\2022\KIKTC-1.EM6 (360)

Date: 2022-11-30

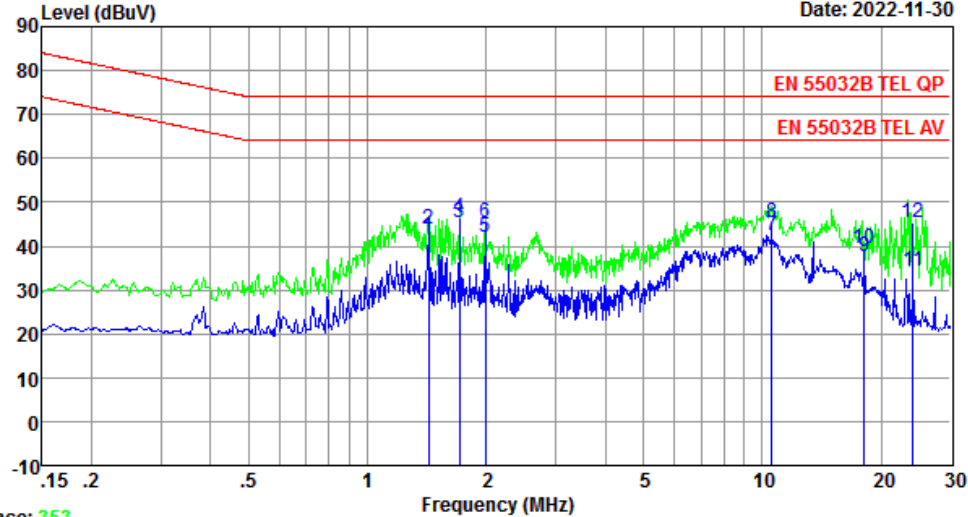

Trace: 353

Site no : 2#CE Shield Room Data no. : 354
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase :
Limit : EN 55032B TEL QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN1 Mode


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	1.43	9.57	9.95	22.62	42.14	64.00	21.86	Average
2	1.43	9.57	9.95	24.36	43.88	74.00	30.12	QP
3	1.71	9.58	9.95	25.97	45.50	64.00	18.50	Average
4	1.71	9.58	9.95	26.85	46.38	74.00	27.62	QP
5	1.99	9.59	9.96	22.66	42.21	64.00	21.79	Average
6	1.99	9.59	9.96	25.85	45.40	74.00	28.60	QP
7	10.56	9.63	10.08	22.60	42.31	64.00	21.69	Average
8	10.56	9.63	10.08	25.63	45.34	74.00	28.66	QP
9	18.14	9.59	10.14	17.77	37.50	64.00	26.50	Average
10	18.14	9.59	10.14	19.75	39.48	74.00	34.52	QP
11	24.14	9.60	10.17	14.50	34.27	64.00	29.73	Average
12	24.14	9.60	10.17	25.64	45.41	74.00	28.59	QP

Remarks: 1. Emission Level= ISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Data: 356

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (360)

Date: 2022-11-30

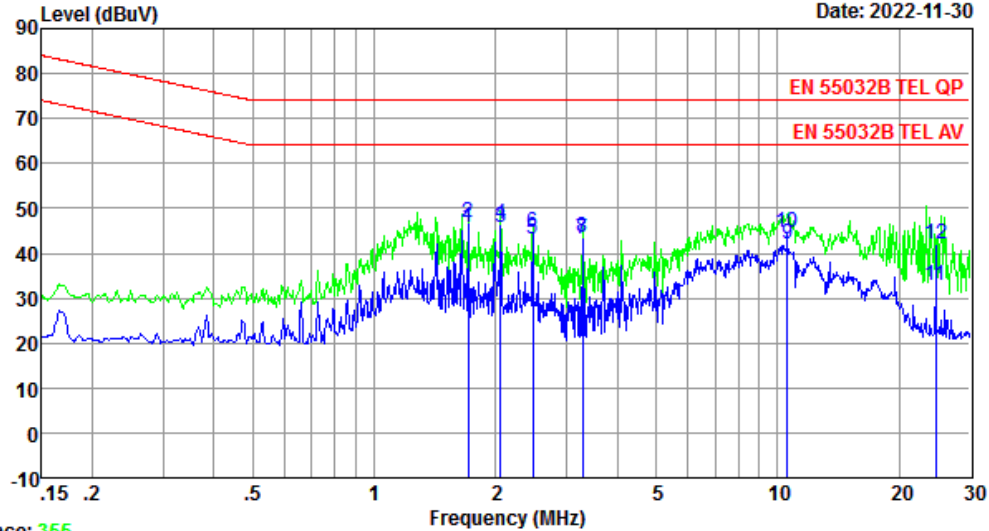

Trace: 355

Site no : 2#CE Shield Room Data no. : 356
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase :
 Limit : EN 55032B TEL QP
 Engineer : DCY
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : M861
 Test Mode : LAN1 Mode


	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	1.71	9.58	9.95	26.05	45.58	64.00	18.42	Average
2	1.71	9.58	9.95	27.36	46.89	74.00	27.11	QP
3	2.05	9.59	9.97	25.98	45.54	64.00	18.46	Average
4	2.05	9.59	9.97	26.86	46.42	74.00	27.58	QP
5	2.47	9.58	9.96	23.45	42.99	64.00	21.01	Average
6	2.47	9.58	9.96	25.07	44.61	74.00	29.39	QP
7	3.29	9.56	9.98	23.73	43.27	64.00	20.73	Average
8	3.29	9.56	9.98	24.12	43.66	74.00	30.34	QP
9	10.56	9.63	10.08	22.21	41.92	64.00	22.08	Average
10	10.56	9.63	10.08	24.96	44.67	74.00	29.33	QP
11	24.66	9.61	10.17	12.88	32.66	64.00	31.34	Average
12	24.66	9.61	10.17	22.23	42.01	74.00	31.99	QP

Remarks: 1. Emission Level= ISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 358

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (360)

Date: 2022-11-30

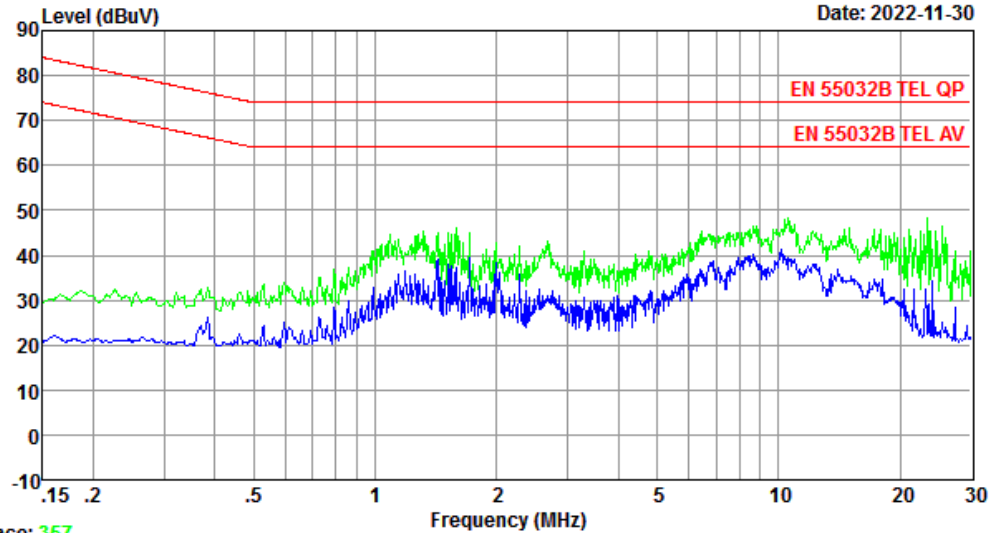


Trace: 357

Site no : 2#CE Shield Room Data no. : 358
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase :
Limit : EN 55032B TEL QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN2 Mode

Data: 360

File: \\EMC-CE-2\Test Data\2022\K\KTC-1.EM6 (360)

Date: 2022-11-30

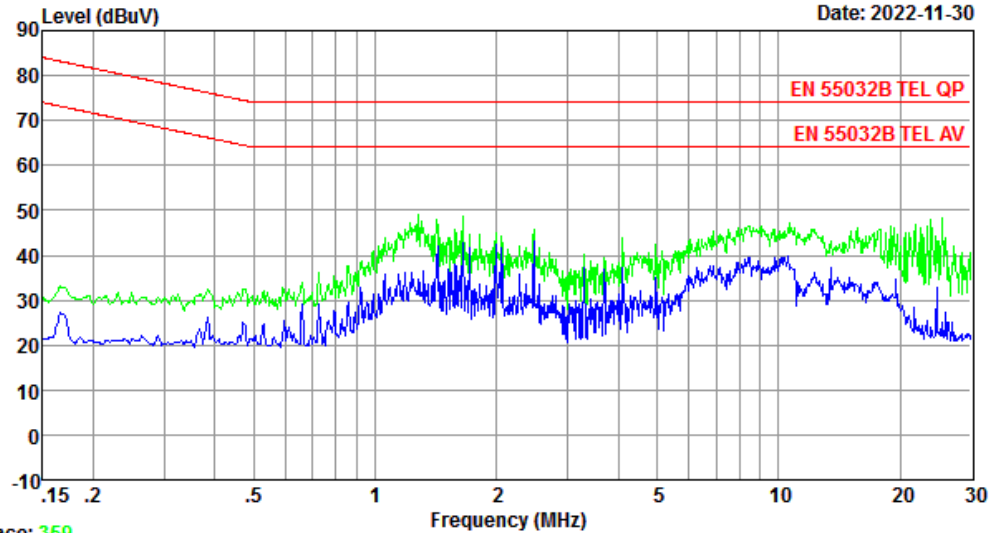

Trace: 359

Site no : 2#CE Shield Room Data no. : 360
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase :
Limit : EN 55032B TEL QP
Engineer : DCY
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : LAN2 Mode

4.3. Radiated Emission Test

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 30~1000MHz
Test Site : 10m Chamber
Limits : EN 55032:2015+A11:2020 Class B


Test Setup

Date of test : Dec. 01, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 10 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.

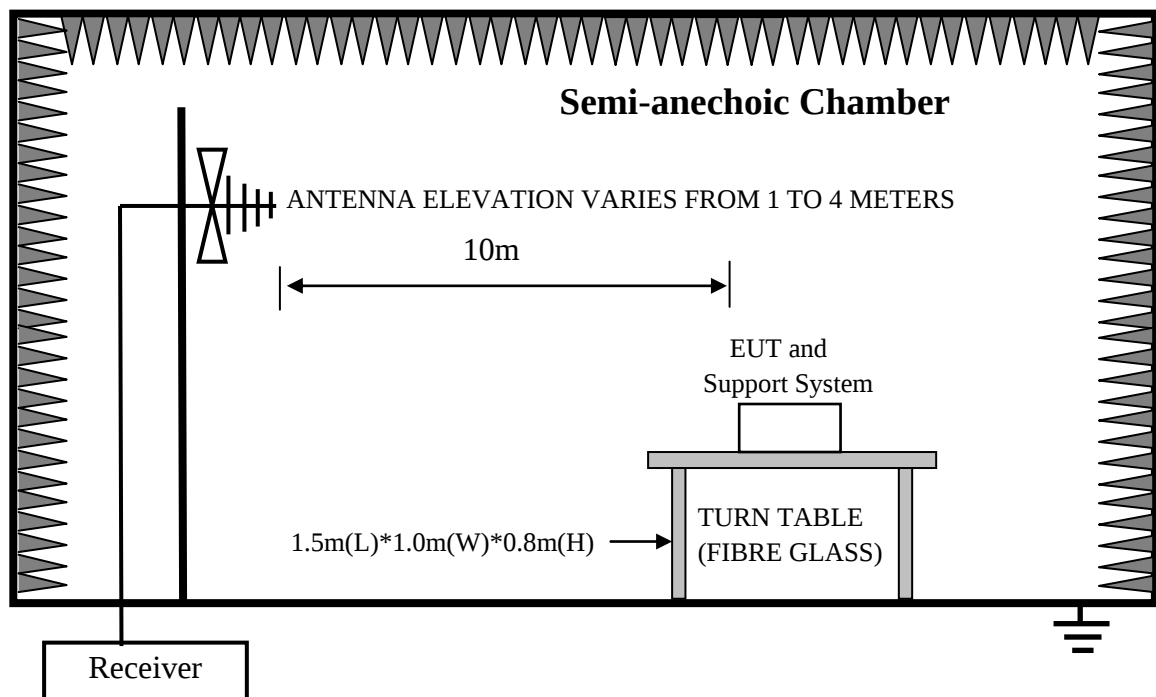

Note: Test uncertainty: ± 4.38 dB (H); ± 4.68 dB (V) at a level of confidence of 95%.


Test Data



EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: Vertical	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

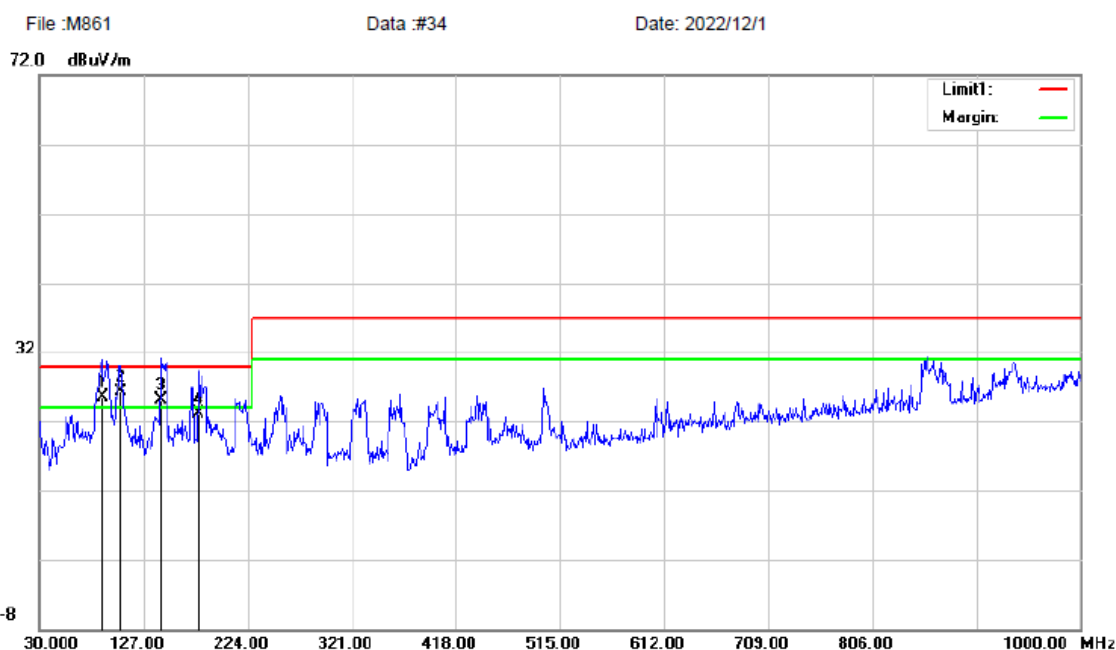

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	88.4381	46.68	9.36	31.6	1.03	25.47	30.00	-4.53	QP	
2	*	106.1006	46.09	10.57	31.49	1.15	26.32	30.00	-3.68	QP	
3	!	144.0081	43.44	11.86	31.53	1.28	25.05	30.00	-4.95	QP	
4		178.6620	43.66	9.65	31.45	1.34	23.20	30.00	-6.80	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: **Horizontal** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

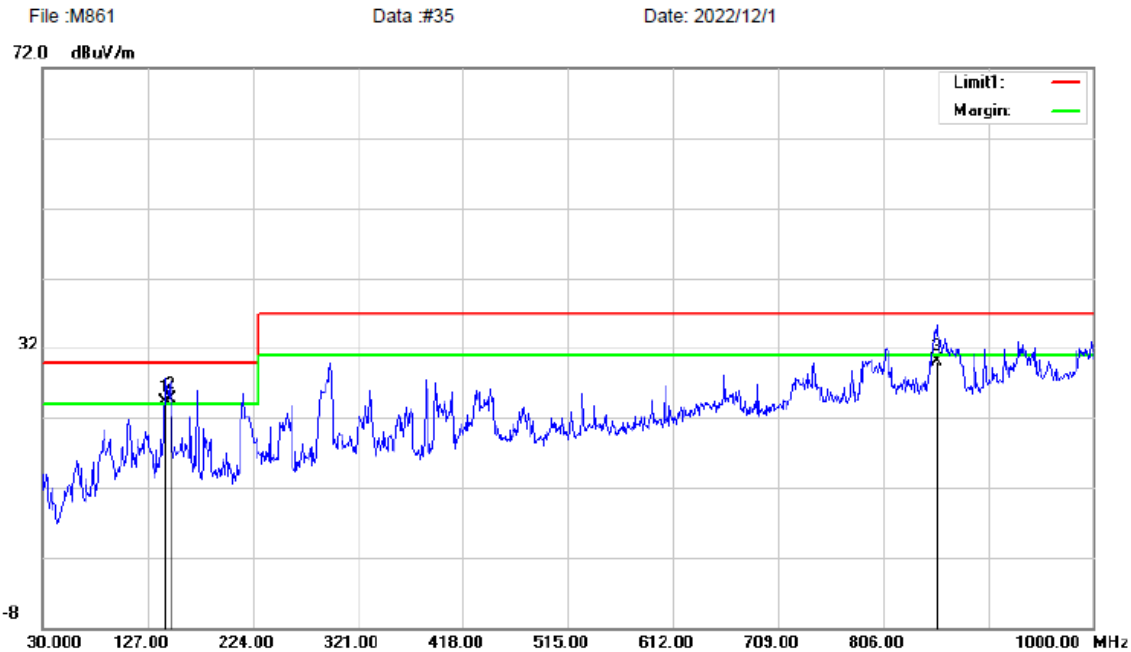

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	143.5713	42.57	11.73	31.7	1.79	24.39	30.00	-5.61	QP	
2	*	148.4610	43.15	11.43	31.68	1.82	24.72	30.00	-5.28	QP	
3		855.3632	32.99	23.93	31.54	4.72	30.10	37.00	-6.90	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber

Limit: EN 55032 B (10M)

Mode: HDMI 2 Mode(3840*2160)

EUT: LCD MONITOR

Note:

Polarization: **Vertical**

Power: AC 230V/50Hz


Temperature: 23.6 (C)

Humidity: 56 %

Distance: 10m

M/N: M861

Radiated Emission

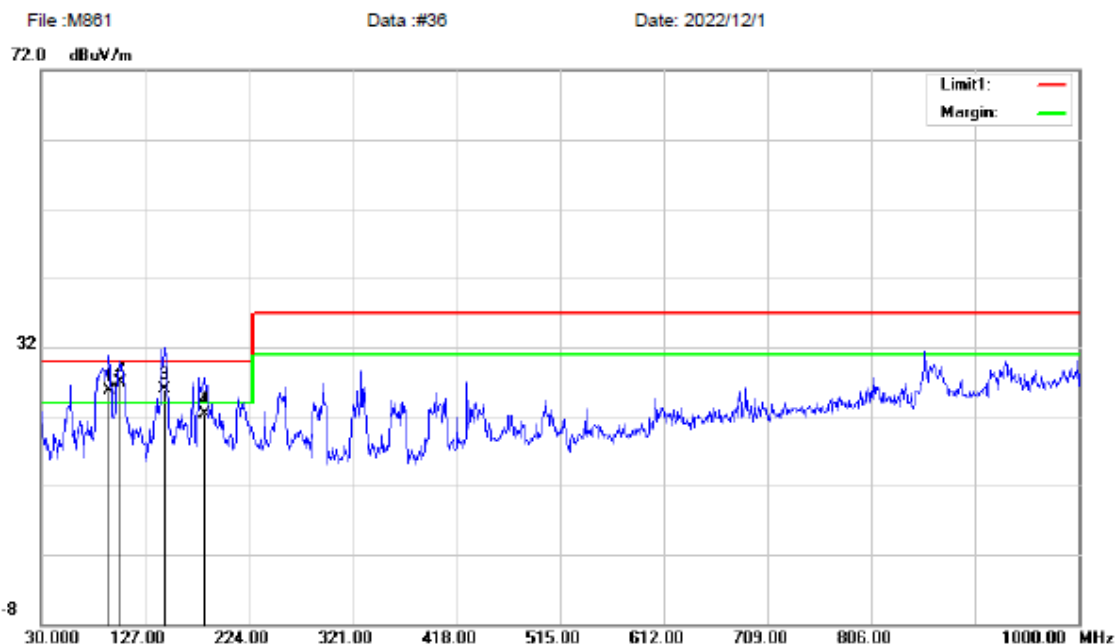

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	94.2131	46.31	9.78	31.52	1.11	25.68	30.00	-4.32	QP	
2	*	105.1574	46.80	10.51	31.49	1.15	26.97	30.00	-3.03	QP	
3	!	146.1420	44.48	11.68	31.54	1.29	25.91	30.00	-4.09	QP	
4		184.0850	43.11	9.35	31.43	1.36	22.39	30.00	-7.61	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: HDMI 2 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

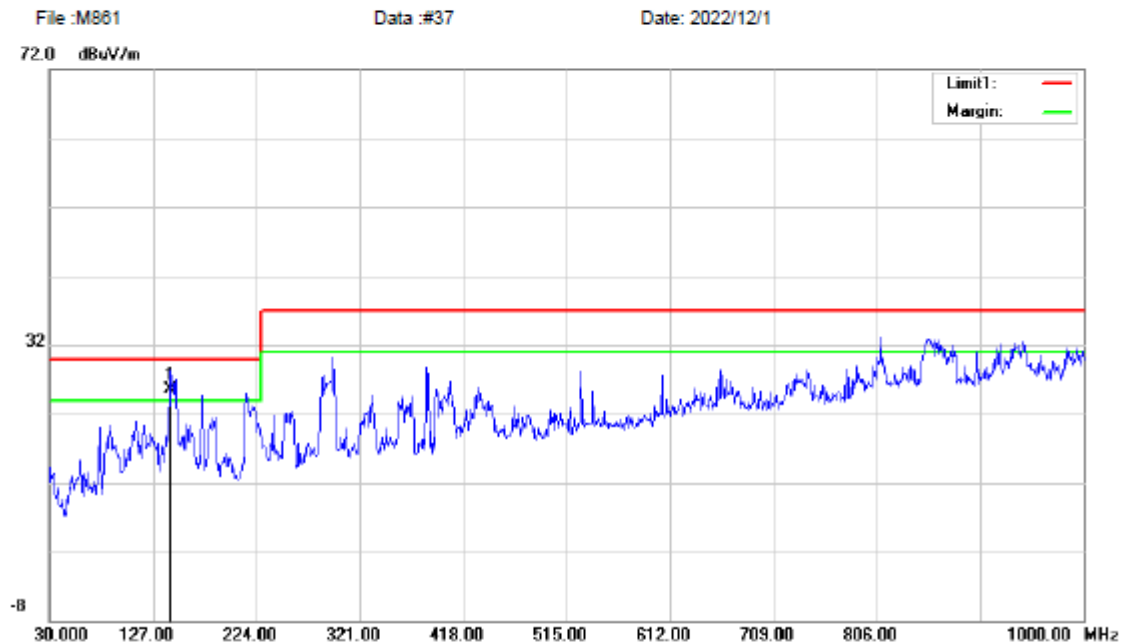

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	143.4906	43.72	11.74	31.7	1.79	25.55	30.00	-4.45	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: **Vertical** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: DP 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

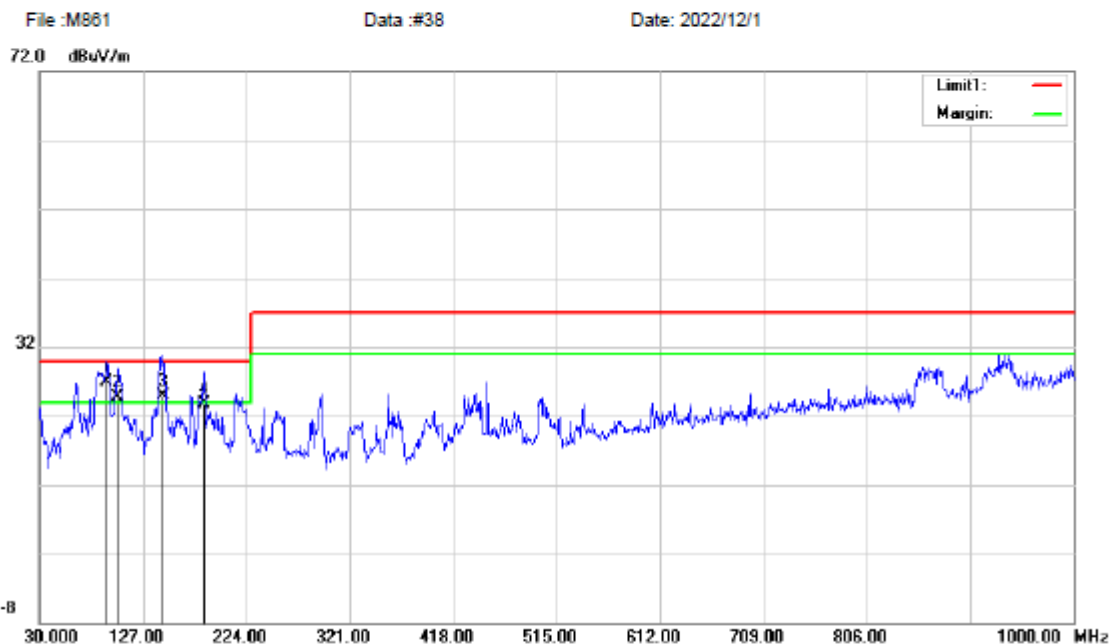

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	93.7706	47.63	9.78	31.52	1.1	26.99	30.00	-3.01	QP	
2	!	103.2588	44.82	10.29	31.48	1.15	24.78	30.00	-5.22	QP	
3	!	146.5974	43.45	11.67	31.54	1.29	24.87	30.00	-5.13	QP	
4		184.6150	44.41	9.32	31.43	1.36	23.66	30.00	-6.34	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: **Horizontal** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: DP 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission



No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	172.8306	46.88	9.56	31.59	2	26.85	30.00	-3.15	QP	
2		854.7570	32.12	23.96	31.55	4.72	29.25	37.00	-7.75	QP	
3		940.4660	31.05	24.71	30.31	5.17	30.62	37.00	-6.38	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: **Vertical** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: DP 2 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

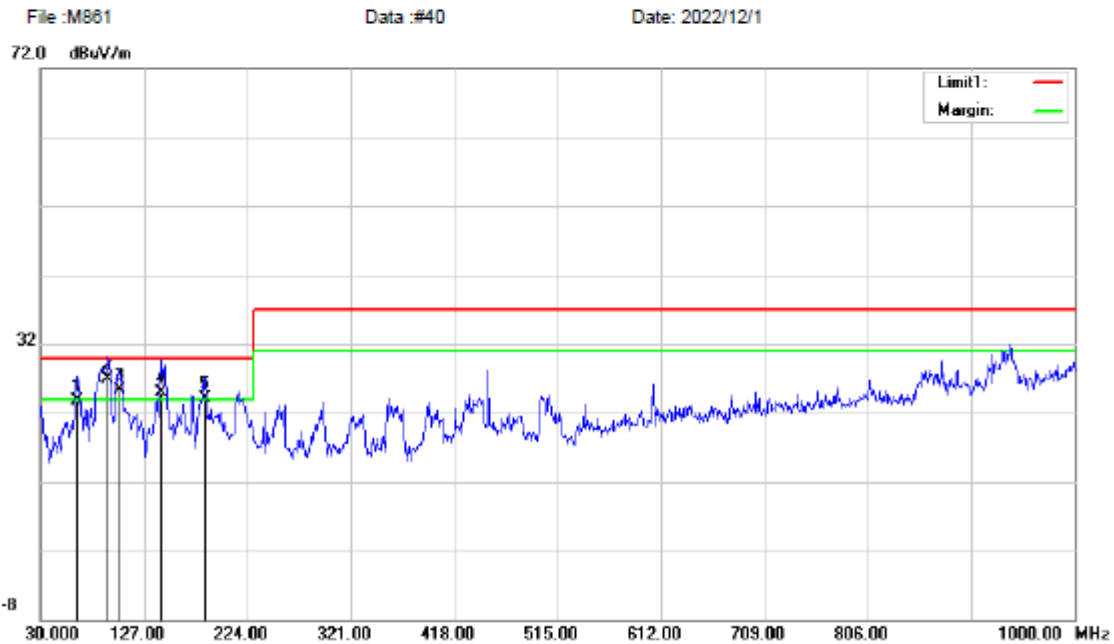

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		64.7212	48.95	5.66	31.66	0.83	23.78	30.00	-6.22	QP	
2	*	93.2355	47.52	9.76	31.54	1.09	26.83	30.00	-3.17	QP	
3	!	104.3874	45.20	10.43	31.49	1.15	25.29	30.00	-4.71	QP	
4	!	143.2937	43.21	11.97	31.53	1.28	24.93	30.00	-5.07	QP	
5	!	184.4721	44.89	9.33	31.43	1.36	24.15	30.00	-5.85	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: **Horizontal** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: DP 2 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

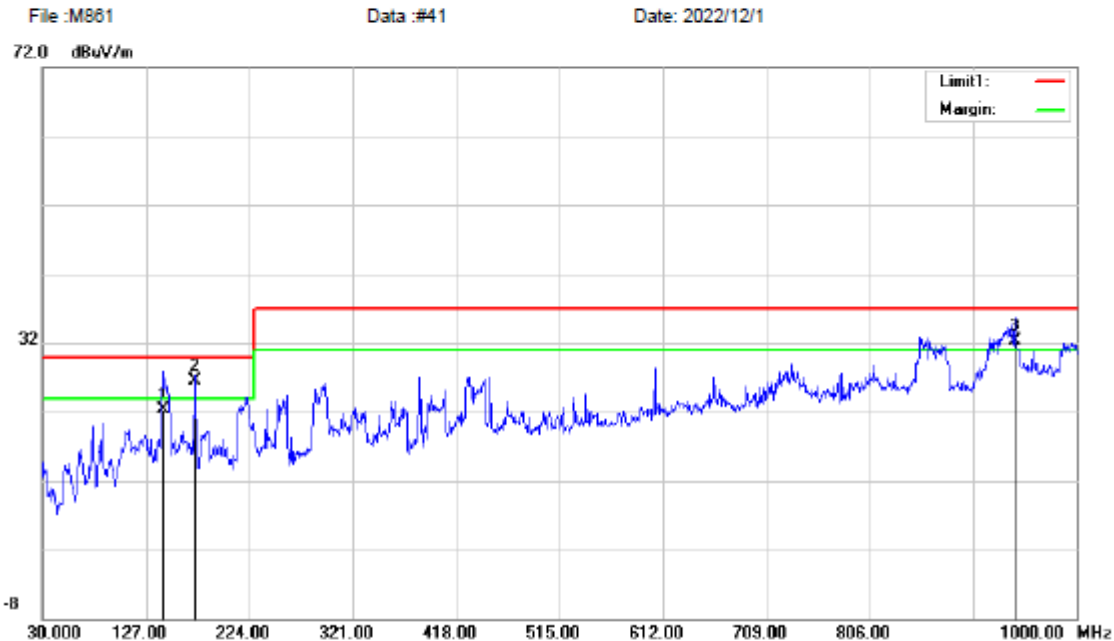

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		143.9831	40.55	11.66	31.7	1.8	22.31	30.00	-7.69	QP	
2	*	172.7894	46.63	9.56	31.59	2	26.60	30.00	-3.40	QP	
3	!	942.4900	32.65	24.75	30.28	5.19	32.31	37.00	-4.69	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: **Vertical** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: OPTION Mode
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

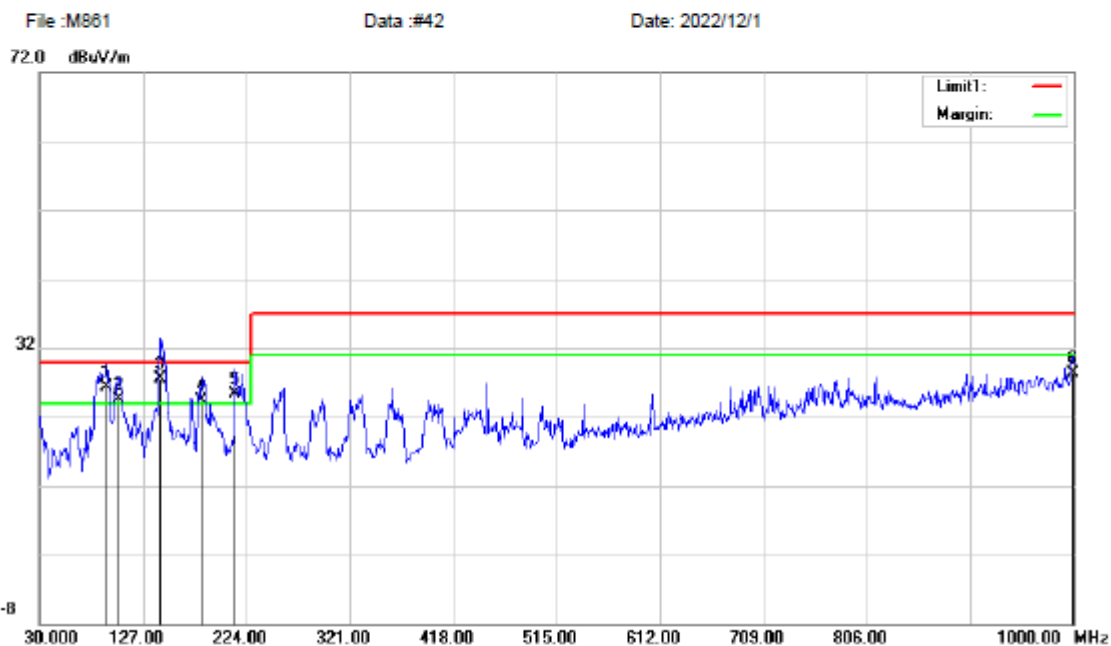

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	94.0256	46.97	9.78	31.52	1.1	26.33	30.00	-3.67	QP	
2	!	104.0836	44.52	10.39	31.48	1.15	24.58	30.00	-5.42	QP	
3	*	143.4880	45.82	11.94	31.53	1.28	27.51	30.00	-2.49	QP	
4	!	182.5322	44.99	9.45	31.44	1.35	24.35	30.00	-5.65	QP	
5	!	214.9850	45.79	9.4	31.37	1.52	25.34	30.00	-4.66	QP	
6		999.8786	28.91	25.9	29.96	3.42	28.27	37.00	-8.73	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site: 10m Chamber
Limit: EN 55032 B (10M)
Mode: OPTION Mode
EUT: LCD MONITOR
Note:

Polarization: *Horizontal*
Power: AC 230V/50Hz
Distance: 10m
M/N: M861

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

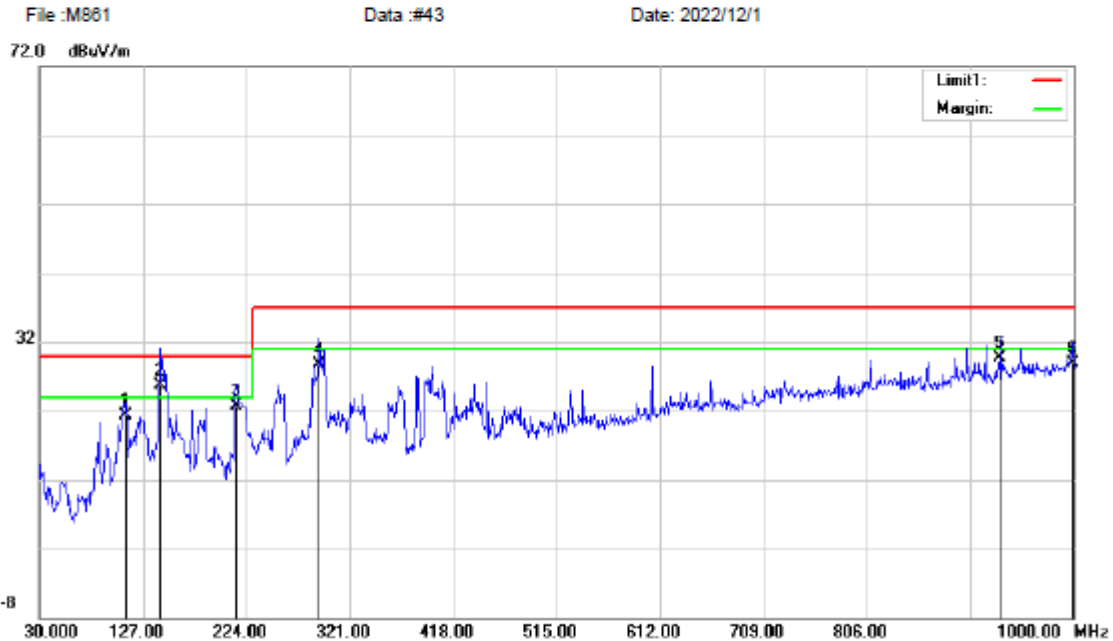

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		111.2373	40.56	10.97	31.76	1.61	21.38	30.00	-8.62	QP	
2 *		143.0882	43.77	11.81	31.71	1.79	25.66	30.00	-4.34	QP	
3		214.9062	42.64	9.49	31.59	2.18	22.72	30.00	-7.28	QP	
4		292.0212	44.07	13.62	31.61	2.65	28.73	37.00	-8.27	QP	
5		931.4936	30.66	24.44	30.48	5.05	29.67	37.00	-7.33	QP	
6		999.8786	28.58	25.4	30.29	5.27	28.96	37.00	-8.04	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN 1 Mode
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 230V/50Hz
Distance: 10m
M/N: M861

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

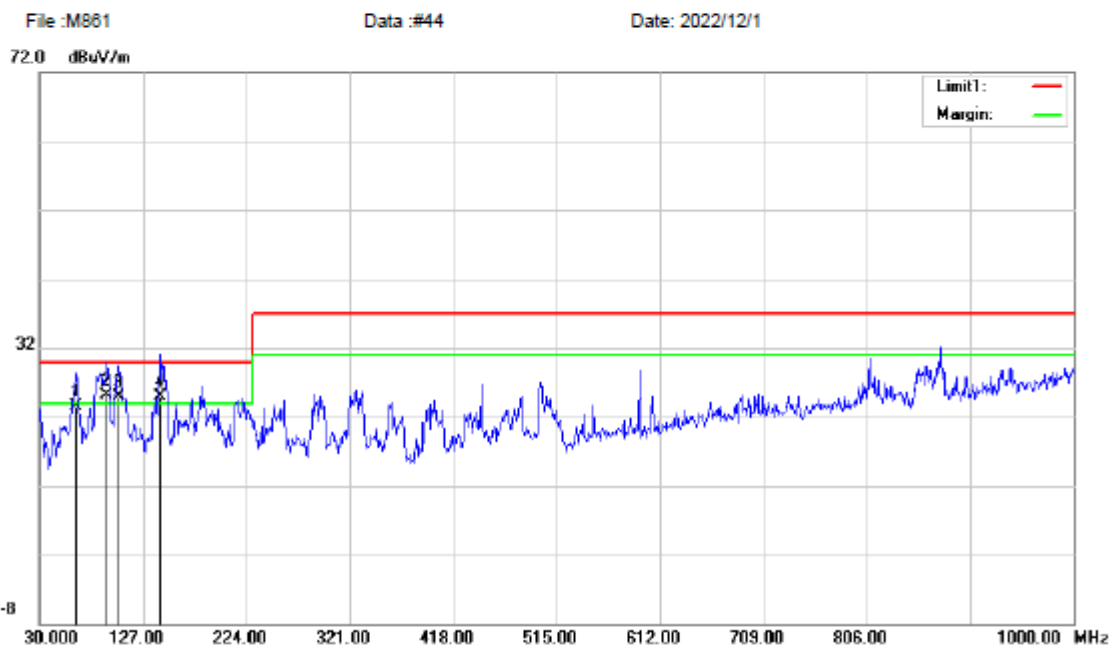

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		64.7575	48.76	5.67	31.66	0.83	23.60	30.00	-6.40	QP	
2	*	93.3738	45.70	9.77	31.53	1.09	25.03	30.00	-4.97	QP	
3	!	104.4413	44.85	10.43	31.49	1.15	24.94	30.00	-5.06	QP	
4	!	143.4381	43.13	11.95	31.53	1.28	24.83	30.00	-5.17	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site: 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: LAN 1 Mode
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

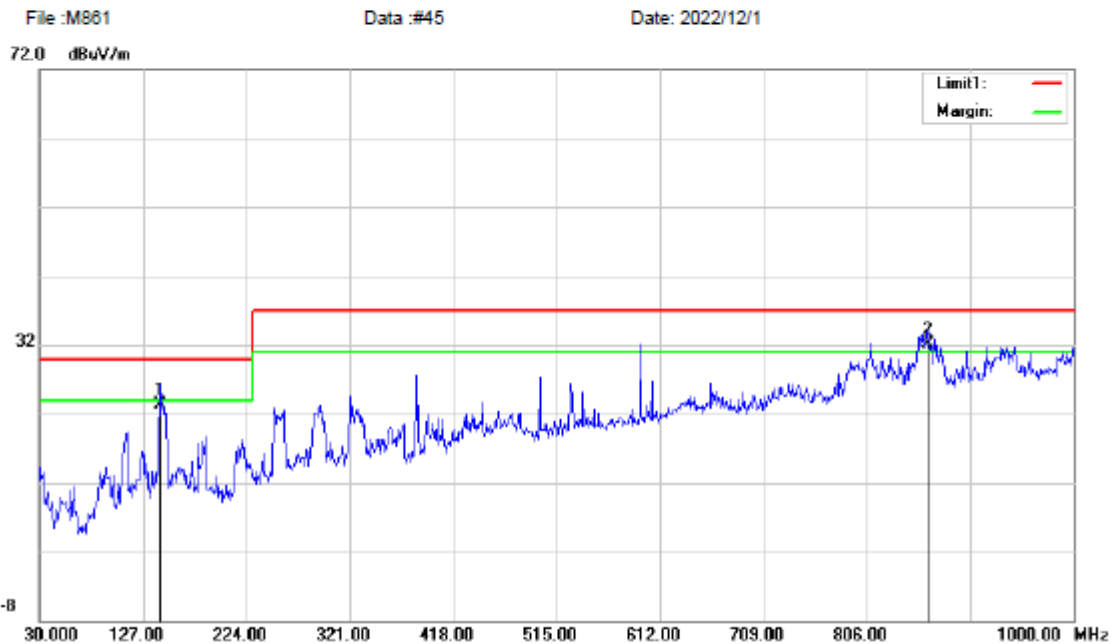

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		143.6110	41.55	11.72	31.7	1.79	23.36	30.00	-6.64	QP	
2 *		864.0388	35.04	23.7	31.43	4.73	32.04	37.00	-4.96	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN 2 Mode
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 230V/50Hz
Distance: 10m
M/N: M861

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

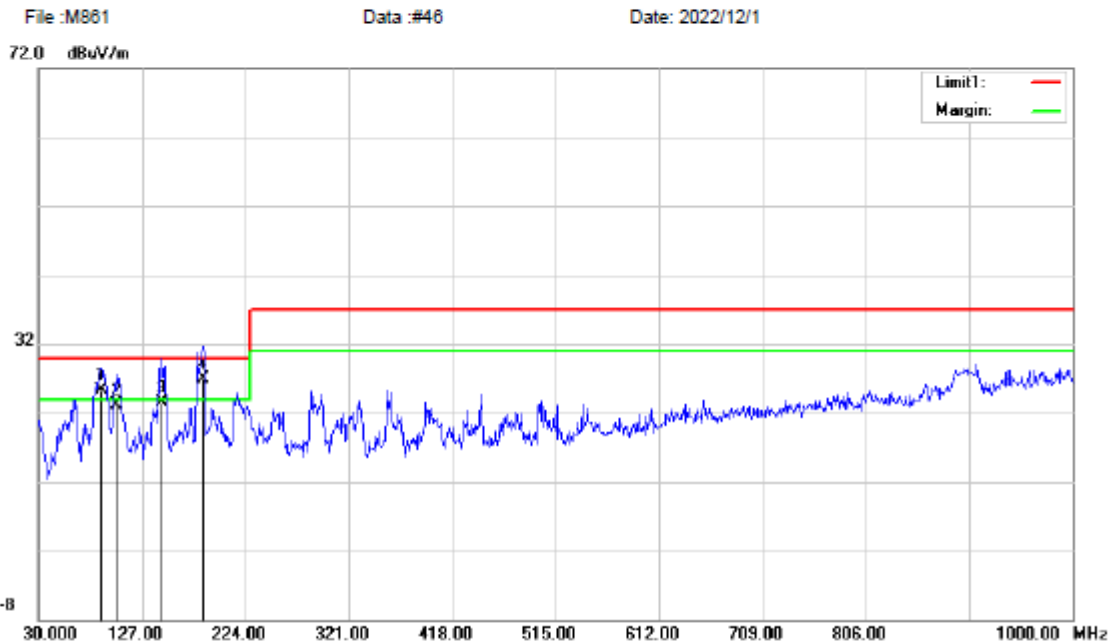

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	89.7342	46.26	9.64	31.6	1.04	25.34	30.00	-4.66	QP	
2		103.4590	43.02	10.32	31.48	1.15	23.01	30.00	-6.99	QP	
3		145.6310	42.14	11.69	31.53	1.29	23.59	30.00	-6.41	QP	
4	*	184.9045	47.65	9.31	31.43	1.36	26.89	30.00	-3.11	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: <i>Horizontal</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: LAN 2 Mode		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

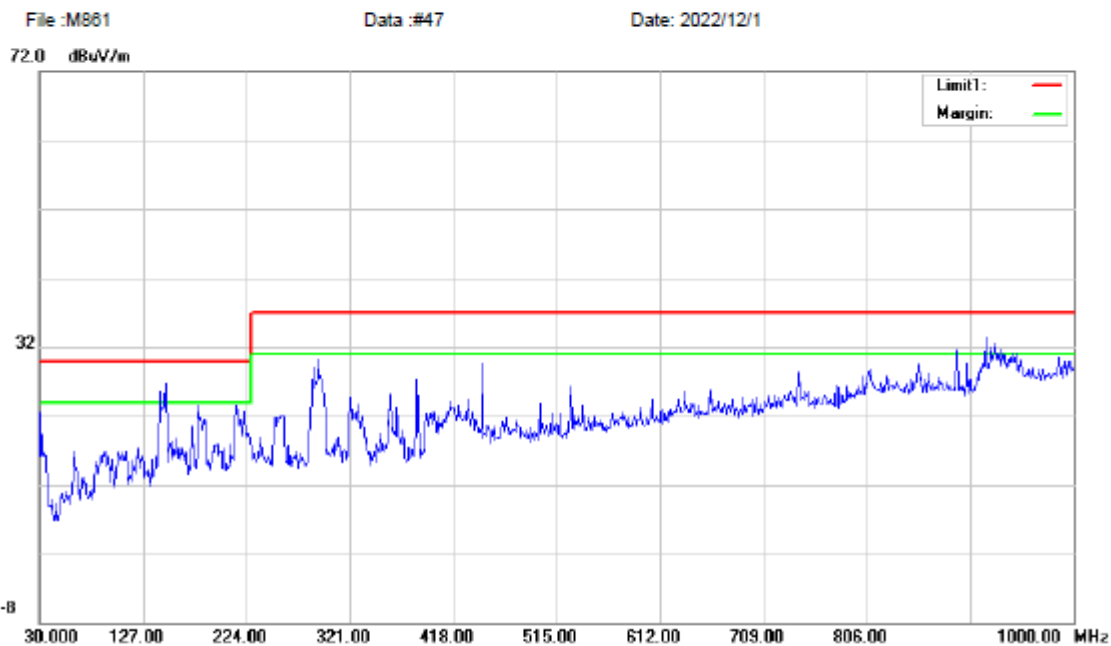

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

- Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber

Polarization: **Vertical**

Temperature: 23.6 (C)

Limit: EN 55032 B (10M)

Power: AC 230V/50Hz

Humidity: 56 %

Mode: COMPUTE MODULE

EUT: LCD MONITOR

Distance: 10m

Note:

M/N: M861


Radiated Emission

File :M861

Data :#48

Date: 2022/12/1

72.0 dBuV/m

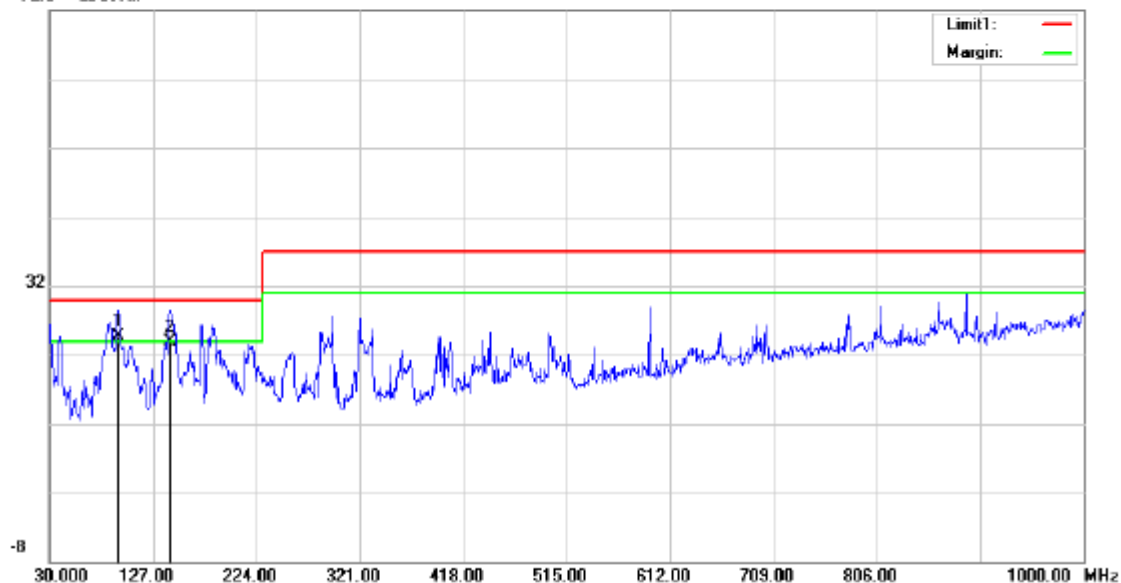

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	94.9382	45.24	9.8	31.5	1.12	24.66	30.00	-5.34	QP	
2		144.2281	42.27	11.82	31.53	1.28	23.84	30.00	-6.16	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber

Polarization: *Horizontal*

Temperature: 23.6 (C)

Limit: EN 55032 B (10M)

Power: AC 230V/50Hz

Humidity: 56 %

Mode: COMPUTE MODULE


EUT: LCD MONITOR

Distance: 10m

Note:

M/N: M861

Radiated Emission

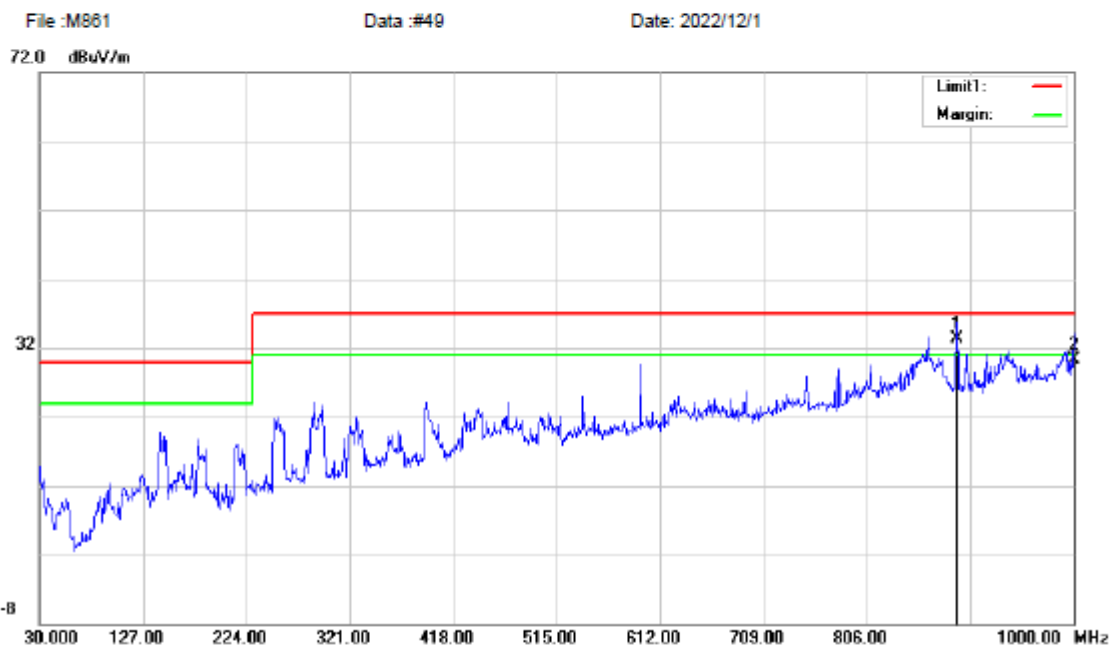

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	890.9888	35.63	23.84	31.01	4.88	33.34	37.00	-3.66	QP	
2		1000.0000	29.92	25.4	30.29	5.27	30.30	37.00	-6.70	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site: 10m Chamber Polarization: *Vertical* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

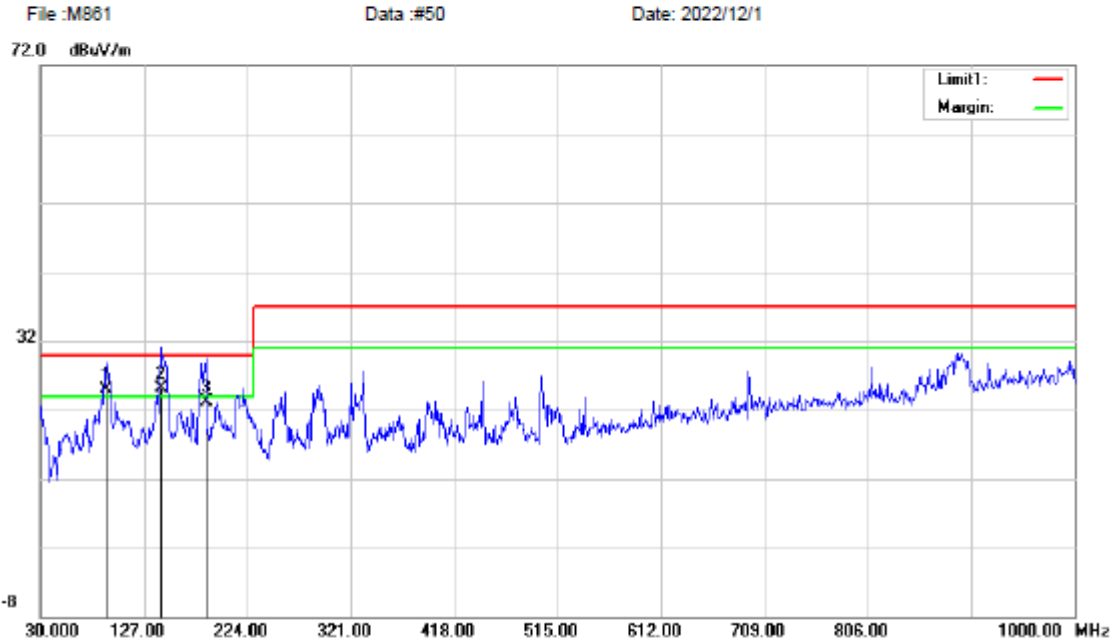

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	92.1546	45.70	9.74	31.56	1.07	24.95	30.00	-5.05	QP	
2	*	143.1963	43.39	11.99	31.53	1.28	25.13	30.00	-4.87	QP	
3		185.4522	43.92	9.26	31.43	1.36	23.11	30.00	-6.89	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

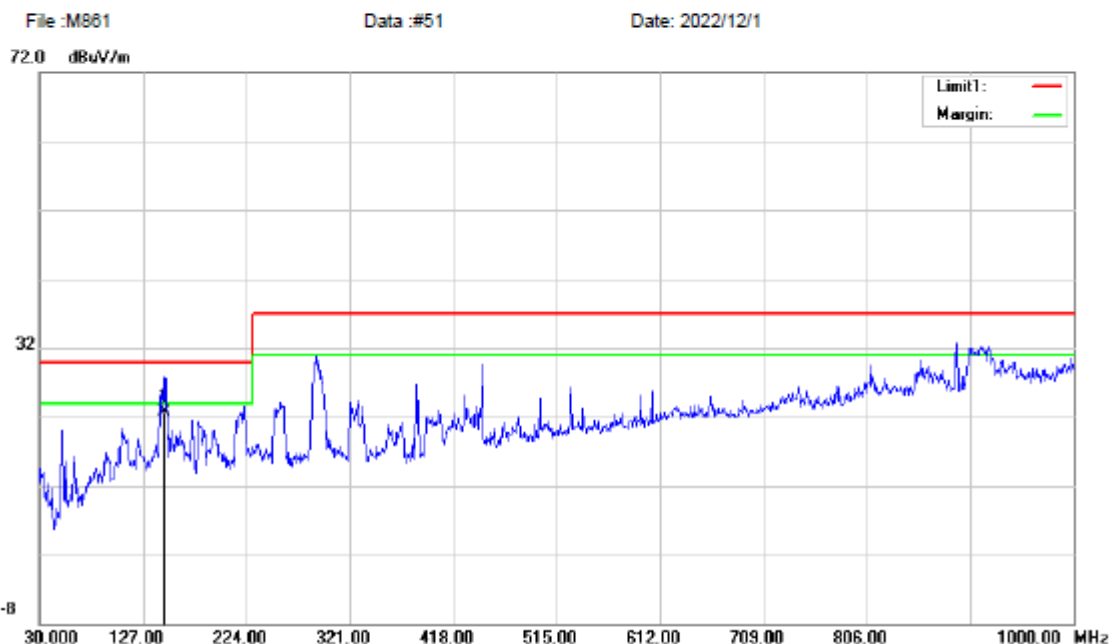

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	146.3251	41.04	11.47	31.69	1.81	22.63	30.00	-7.37	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber

Polarization: **Vertical**

Temperature: 23.6 (C)

Limit: EN 55032 B (10M)

Power: AC 110V/60Hz

Humidity: 56 %

Mode: HDMI 2 Mode(3840*2160)

EUT: LCD MONITOR

Distance: 10m

Note:

M/N: M861


Radiated Emission

File :M861

Data :#52

Date: 2022/12/1

72.0 dBuV/m

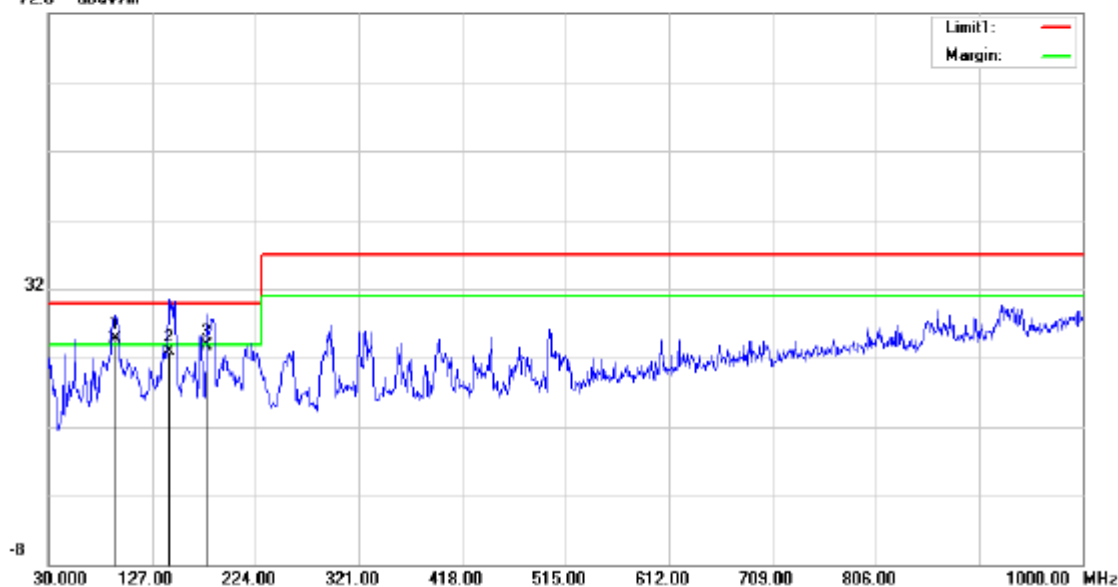

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	93.5874	45.41	9.77	31.53	1.1	24.75	30.00	-5.25	QP	
2		143.2567	41.26	11.98	31.53	1.28	22.99	30.00	-7.01	QP	
3		178.4570	44.10	9.66	31.45	1.34	23.65	30.00	-6.35	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: HDMI 2 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

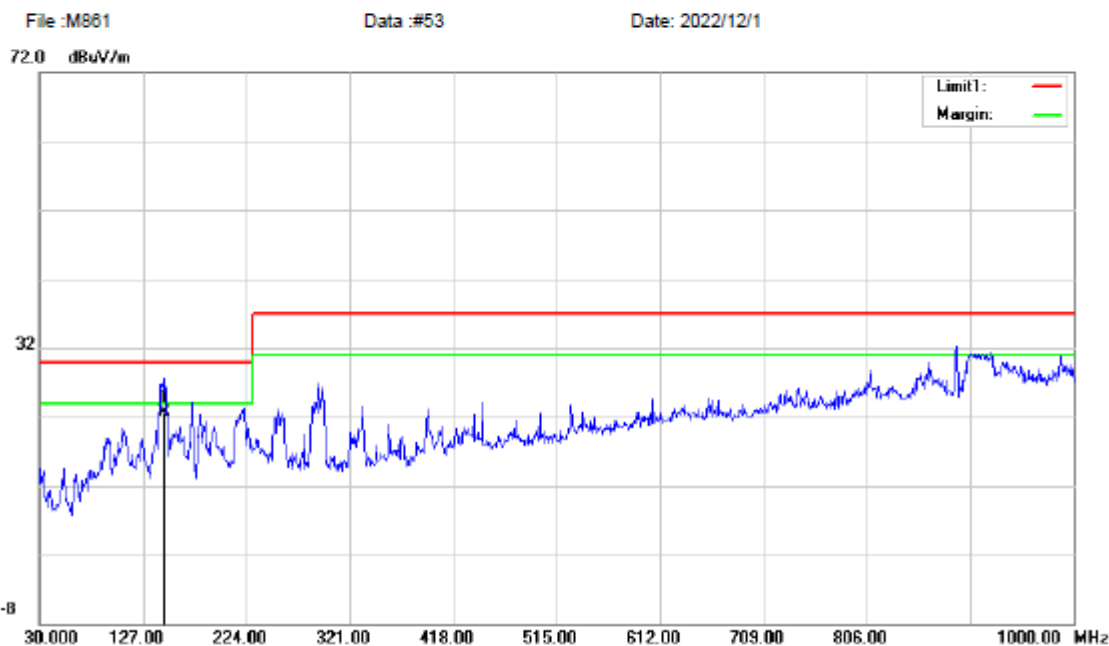

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	147.8951	41.11	11.44	31.68	1.82	22.69	30.00	-7.31	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber

Polarization: **Vertical**

Temperature: 23.6 (C)

Limit: EN 55032 B (10M)

Power: AC 110V/60Hz

Humidity: 56 %

Mode: DP 1 Mode(3840*2160)

EUT: LCD MONITOR

Distance: 10m

Note:

M/N: M861


Radiated Emission

File :M861

Data :#54

Date: 2022/12/1

72.0 dBuV/m

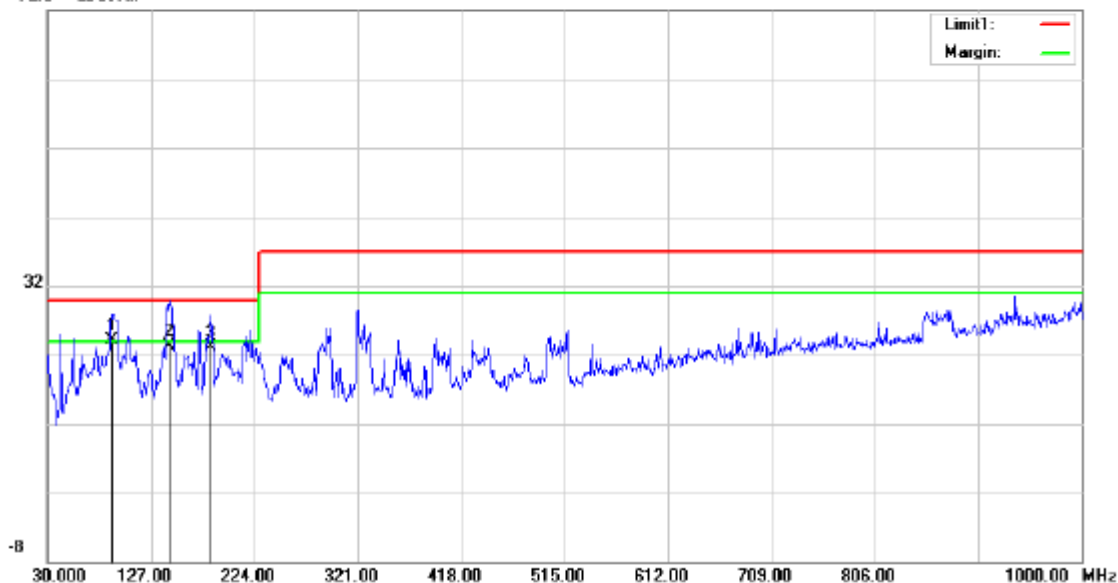

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	91.1100	44.95	9.72	31.58	1.06	24.15	30.00	-5.85	QP	
2		145.1031	41.82	11.7	31.53	1.29	23.28	30.00	-6.72	QP	
3		184.1087	43.82	9.35	31.43	1.36	23.10	30.00	-6.90	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: DP 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission



No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	147.6125	40.41	11.45	31.69	1.82	21.99	30.00	-8.01	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: **Vertical** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: DP 2 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

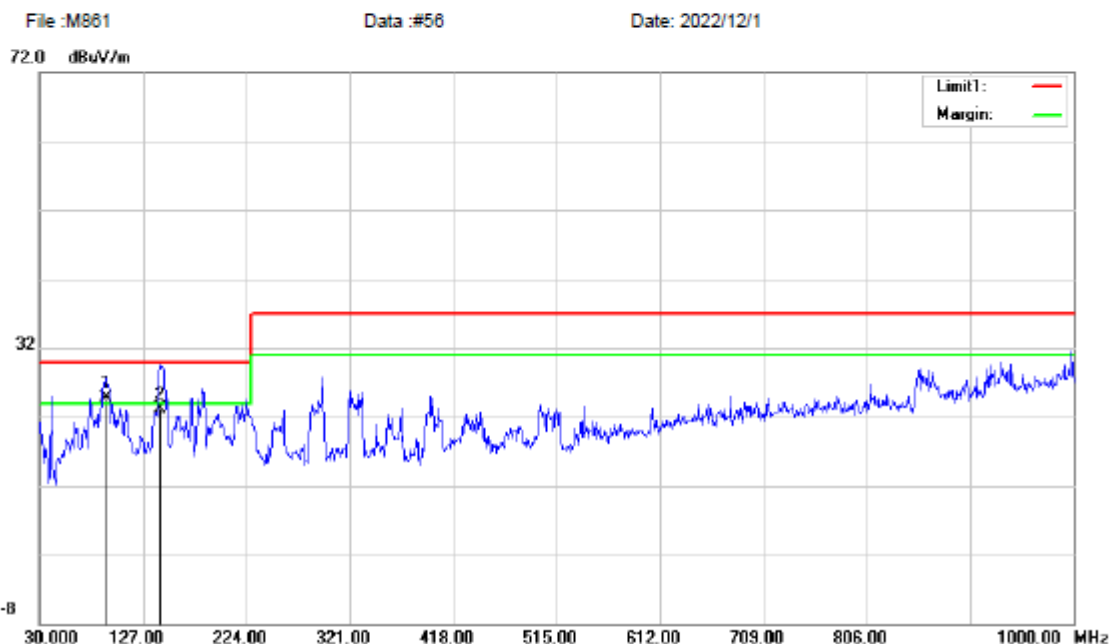

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	92.1020	45.49	9.74	31.56	1.07	24.74	30.00	-5.26	QP	
2		144.4600	41.57	11.79	31.53	1.28	23.11	30.00	-6.89	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: <i>Horizontal</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: DP 2 Mode(3840*2160)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

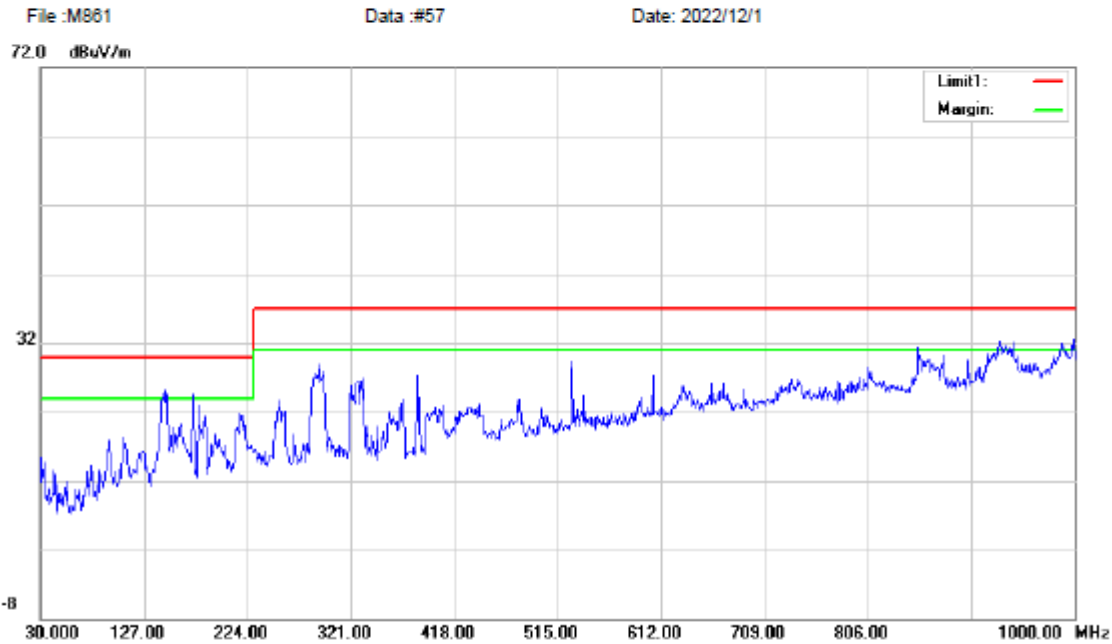

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: **Vertical** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: LAN 1 Mode
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

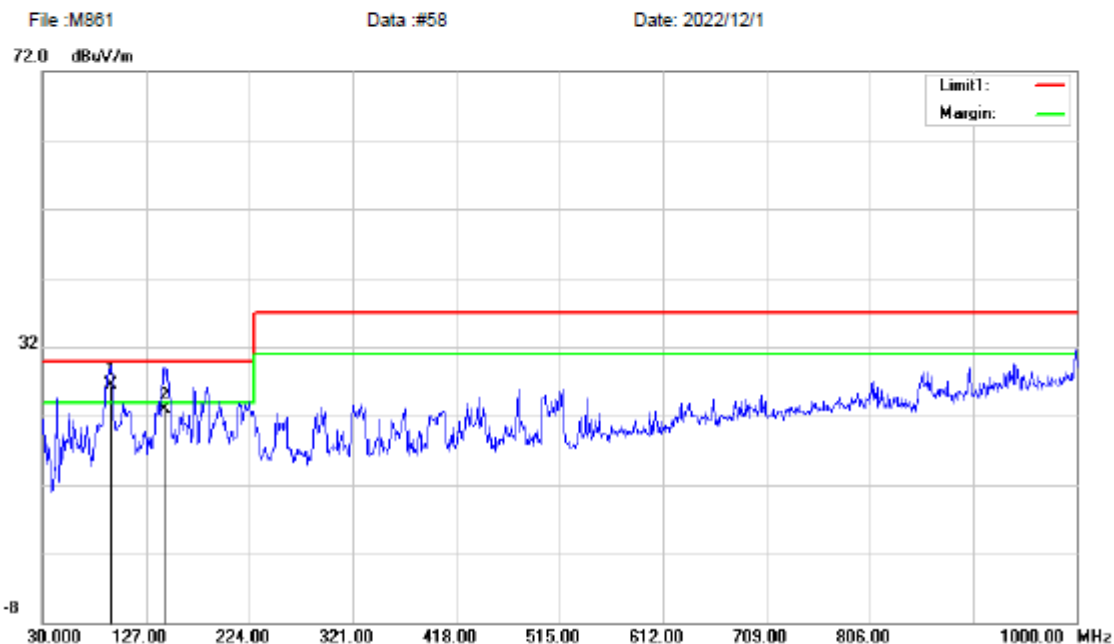

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	94.1412	47.15	9.78	31.52	1.11	26.52	30.00	-3.48	QP	
2		144.5813	41.47	11.77	31.53	1.28	22.99	30.00	-7.01	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: LAN 1 Mode
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861


Radiated Emission

File : M861

Data : #59

Date: 2022/12/1

72.0 dBuV/m

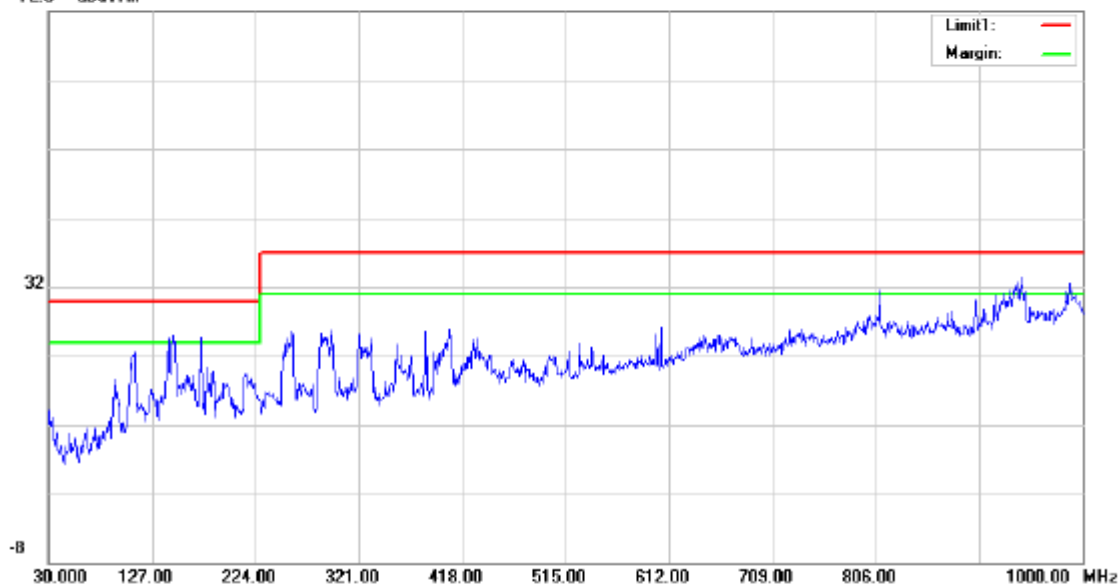

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN 2 Mode
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 110V/60Hz
Distance: 10m
M/N: M861

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

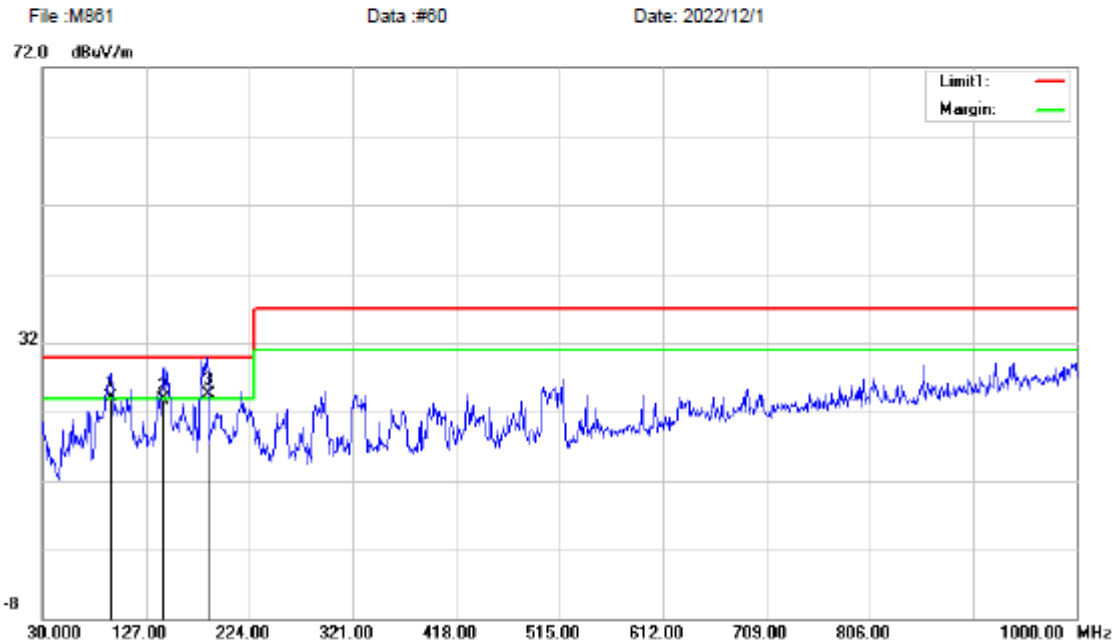

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	94.2625	44.77	9.79	31.51	1.11	24.16	30.00	-5.84	QP	
2		143.9750	42.00	11.86	31.53	1.28	23.61	30.00	-6.39	QP	
3	*	185.4763	45.27	9.26	31.43	1.36	24.46	30.00	-5.54	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site: 10m Chamber	Polarization: <i>Horizontal</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: LAN 2 Mode		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

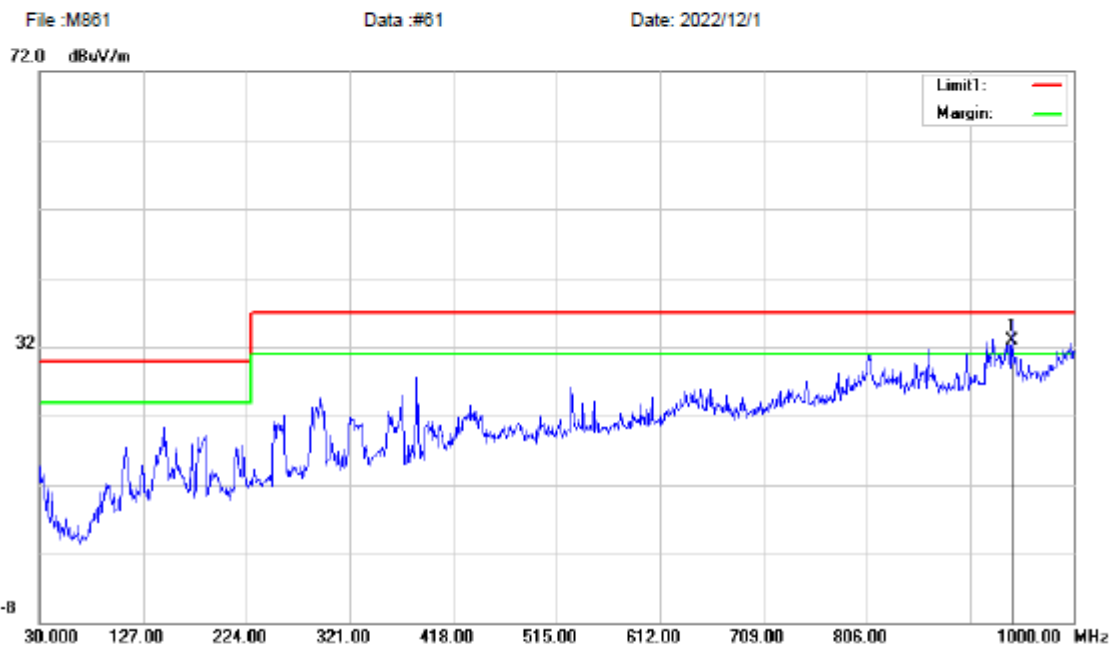

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	942.5362	33.29	24.75	30.28	5.19	32.95	37.00	-4.05	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: <i>Vertical</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: OPTION Mode		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

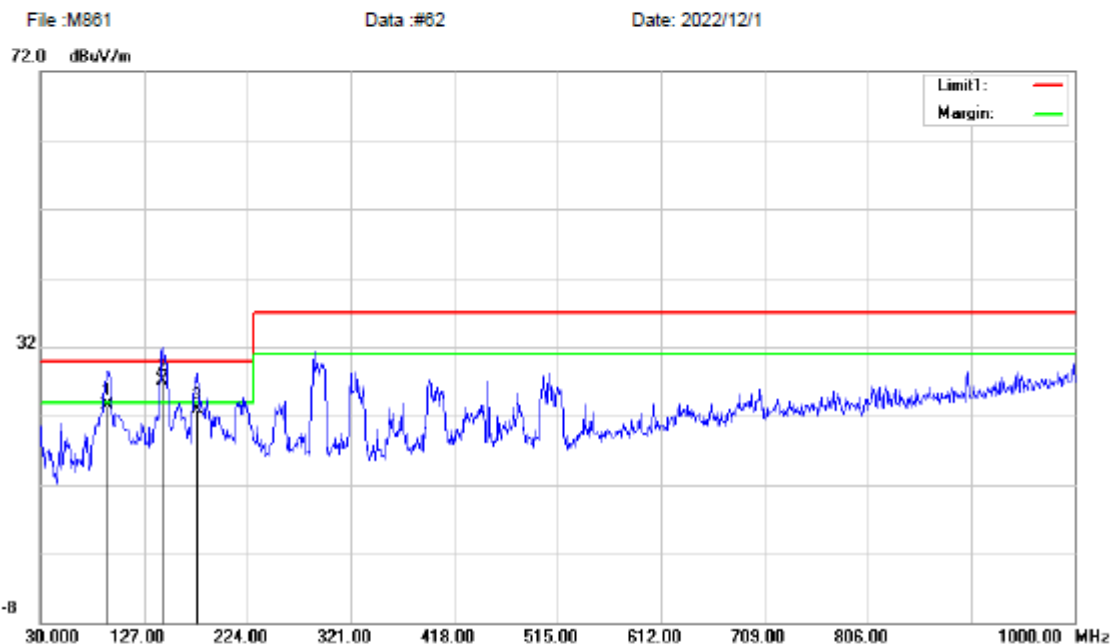

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		93.6050	44.10	9.77	31.53	1.1	23.44	30.00	-6.56	QP	
2	*	144.7306	45.69	11.74	31.53	1.28	27.18	30.00	-2.82	QP	
3		176.8335	43.32	9.73	31.45	1.34	22.94	30.00	-7.06	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber Polarization: *Horizontal* Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: OPTION Mode
EUT: LCD MONITOR Distance: 10m
Note: M/N: M861

Radiated Emission

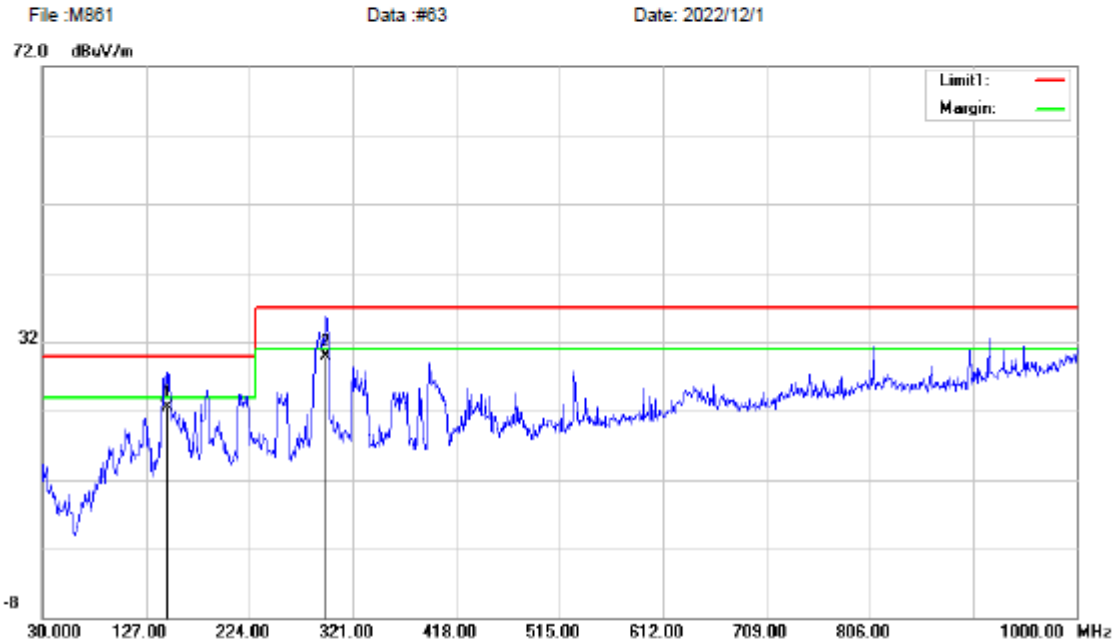

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		147.8762	40.90	11.44	31.68	1.82	22.48	30.00	-7.52	QP	
2 *		296.2606	45.27	13.53	31.6	2.68	29.88	37.00	-7.12	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: <i>Vertical</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: COMPUTE MODULE		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: M861	

Radiated Emission

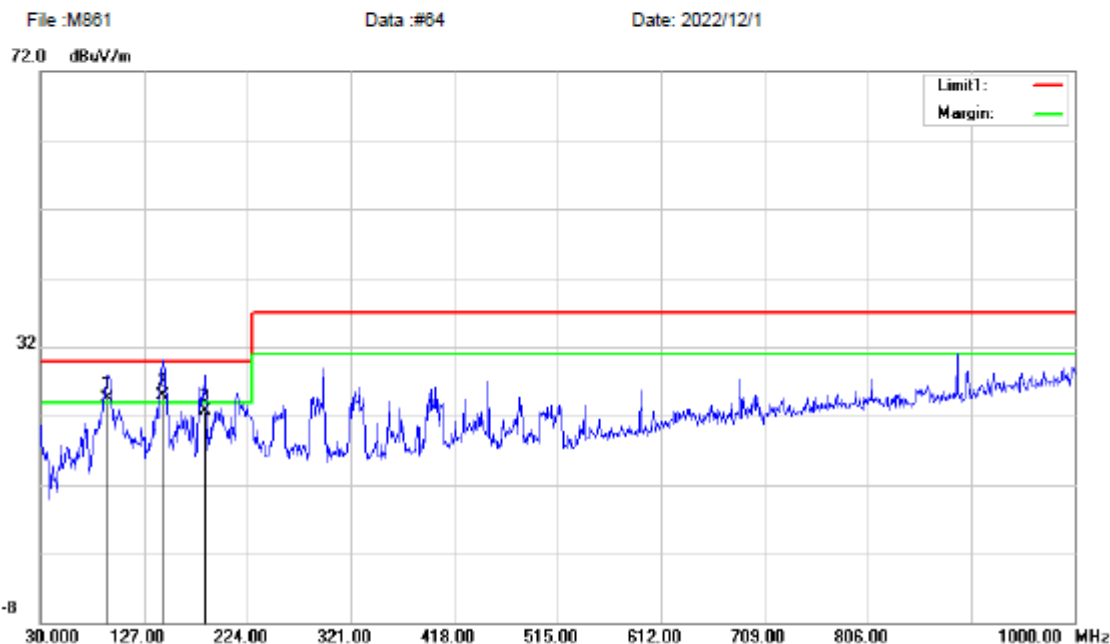

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	93.6681	45.08	9.77	31.53	1.1	24.42	30.00	-5.58	QP	
2	*	145.4300	43.52	11.69	31.53	1.29	24.97	30.00	-5.03	QP	
3		184.9575	43.56	9.3	31.43	1.36	22.79	30.00	-7.21	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site: 10m Chamber

Polarization: *Horizontal*

Temperature: 23.6 (C)

Limit: EN 55032 B (10M)

Power: AC 110V/60Hz

Humidity: 56 %

Mode: COMPUTE MODULE

EUT: LCD MONITOR

Distance: 10m

Note:

M/N: M861


Radiated Emission

File :M861

Data :#65

Date: 2022/12/1

72.0 dBuV/m

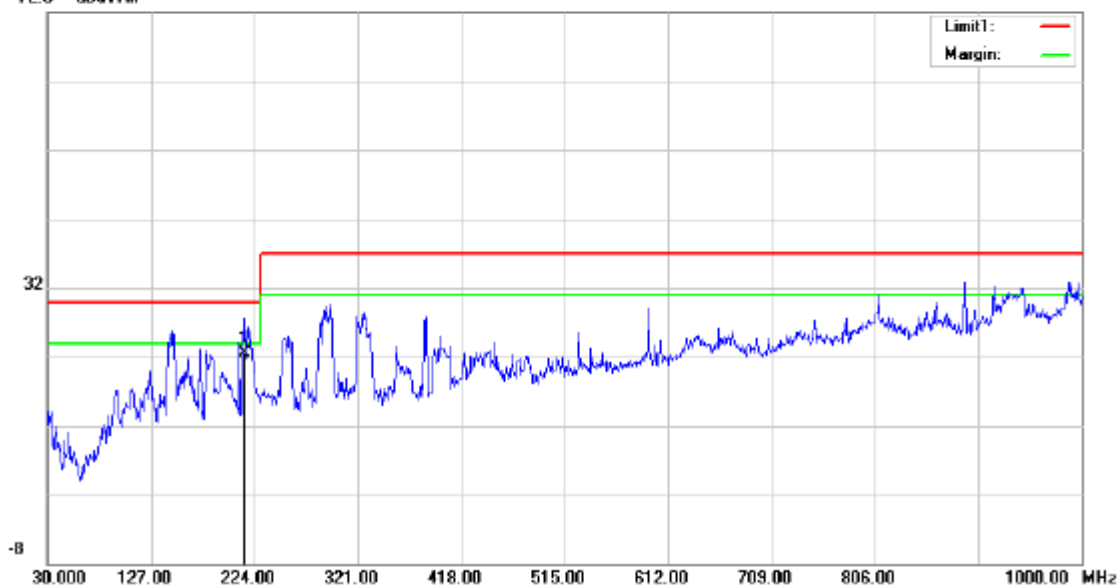

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	214.5943	42.48	9.44	31.59	2.18	22.51	30.00	-7.49	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.



4.4. Radiated Emission Test (above 1GHz)

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 1GHz-6GHz
Test Site : 966 Chamber
Limits : EN 55032:2015+A11:2020 Class B


Test Setup

Date of test : Nov. 30, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE, OPTION Mode

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector and Average detector from the spectrum, and all the final readings from the test receiver were measured with the Peak detector and Average detector.

The bandwidth setting on the test receiver was 1MHz(above 1GHz).

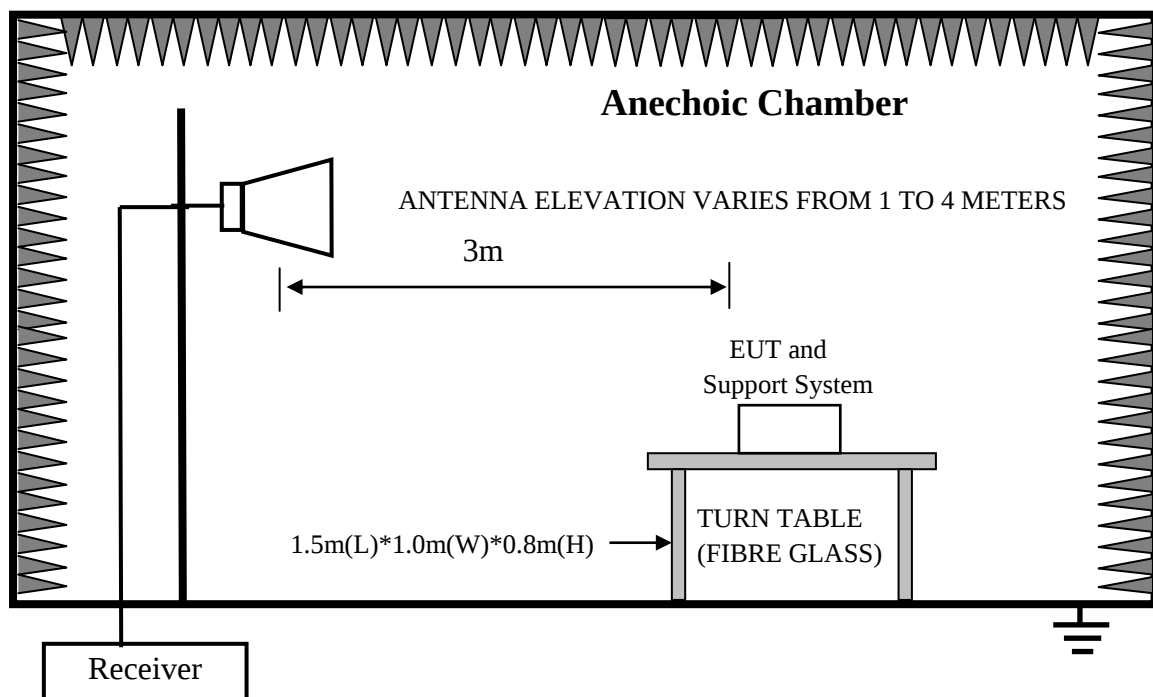


Note: Test uncertainty: $\pm 4.78\text{dB}$ at a level of confidence of 95%.

Test Data

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

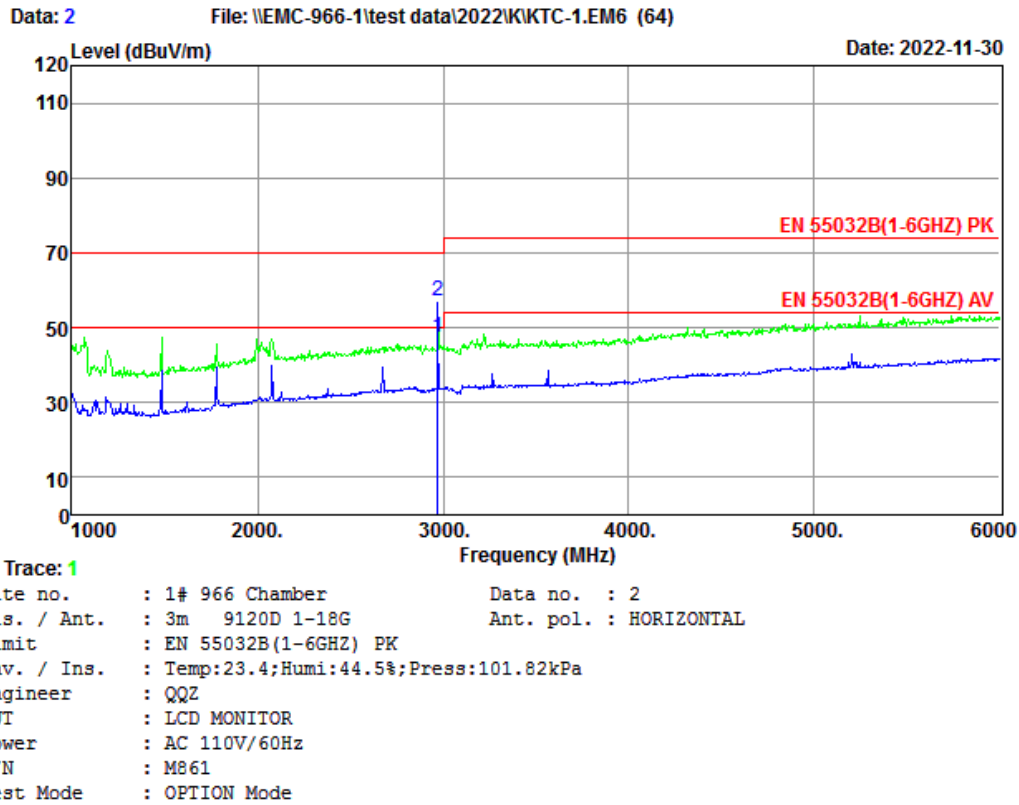

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.42	47.23	50.00	2.77	Average
2	2970.00	28.99	3.82	24.32	57.13	70.00	12.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.



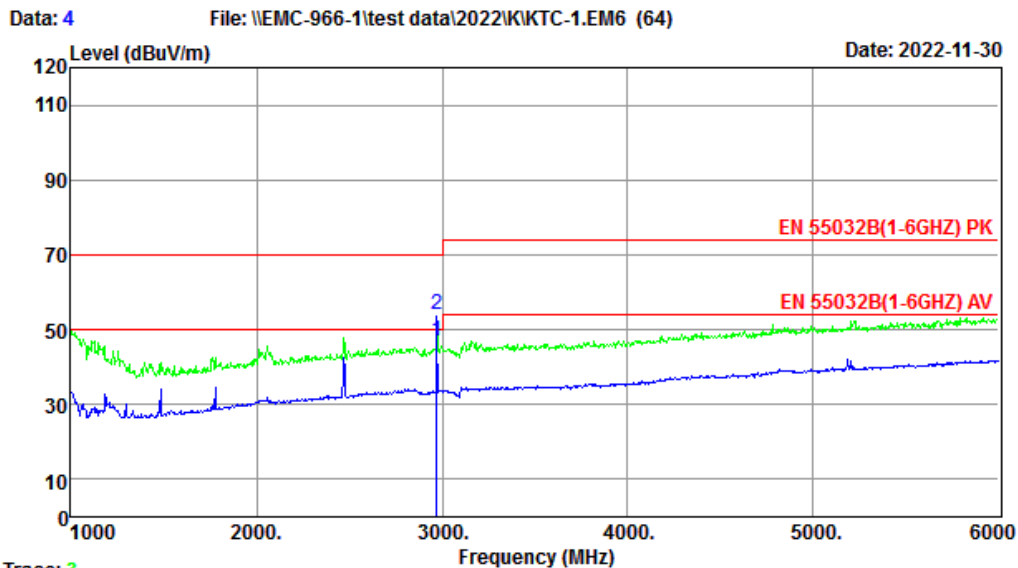

Site no. : 1# 966 Chamber Data no. : 4
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : OPTION Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.26	47.07	50.00	2.93	Average
2	2970.00	28.99	3.82	21.34	54.15	70.00	15.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 6

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

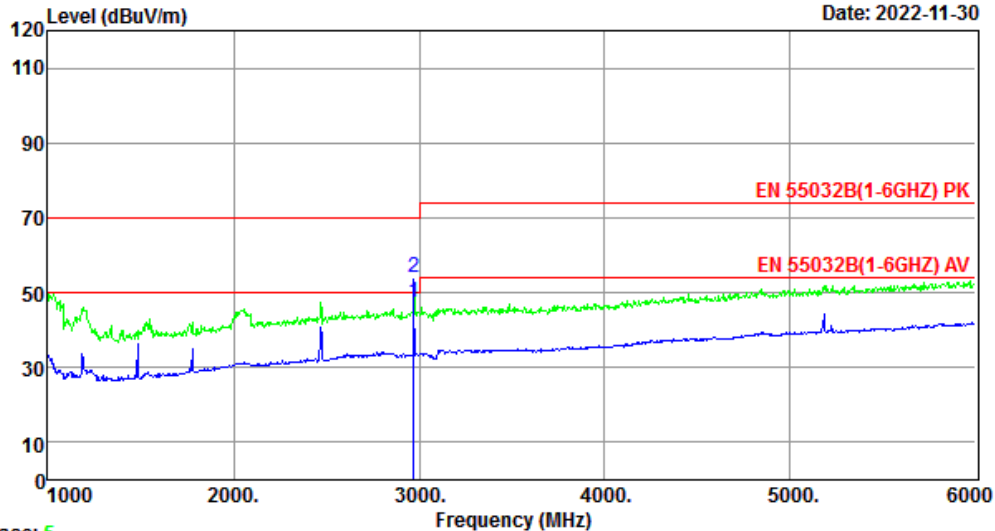

Trace: 5

Site no. : 1# 966 Chamber Data no. : 6
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : OPTION Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.43	47.24	50.00	2.76	Average
2	2970.00	28.99	3.82	21.13	53.94	70.00	16.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 8

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

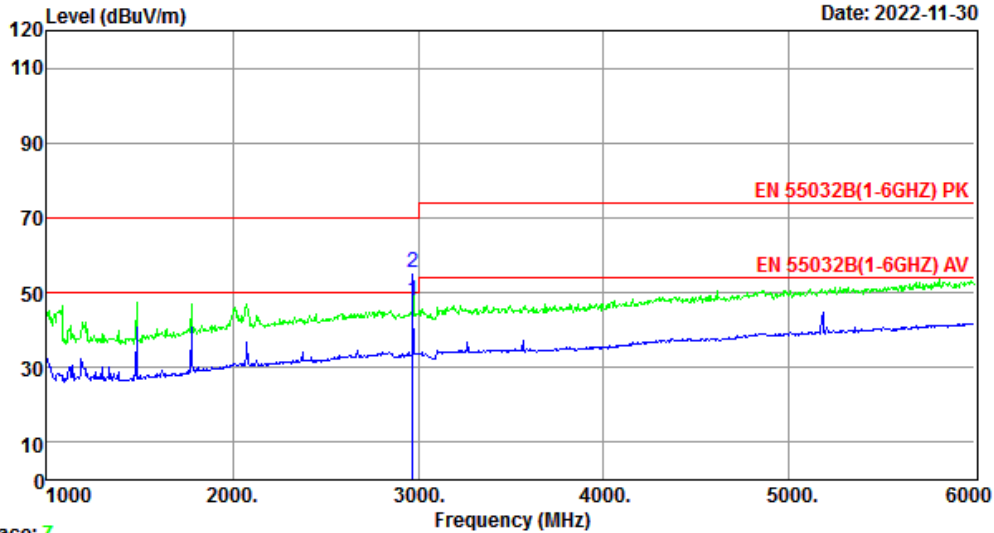


Trace: 7

Site no. : 1# 966 Chamber Data no. : 8
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : OPTION Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.81	47.62	50.00	2.38	Average
2	2970.00	28.99	3.82	22.42	55.23	70.00	14.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

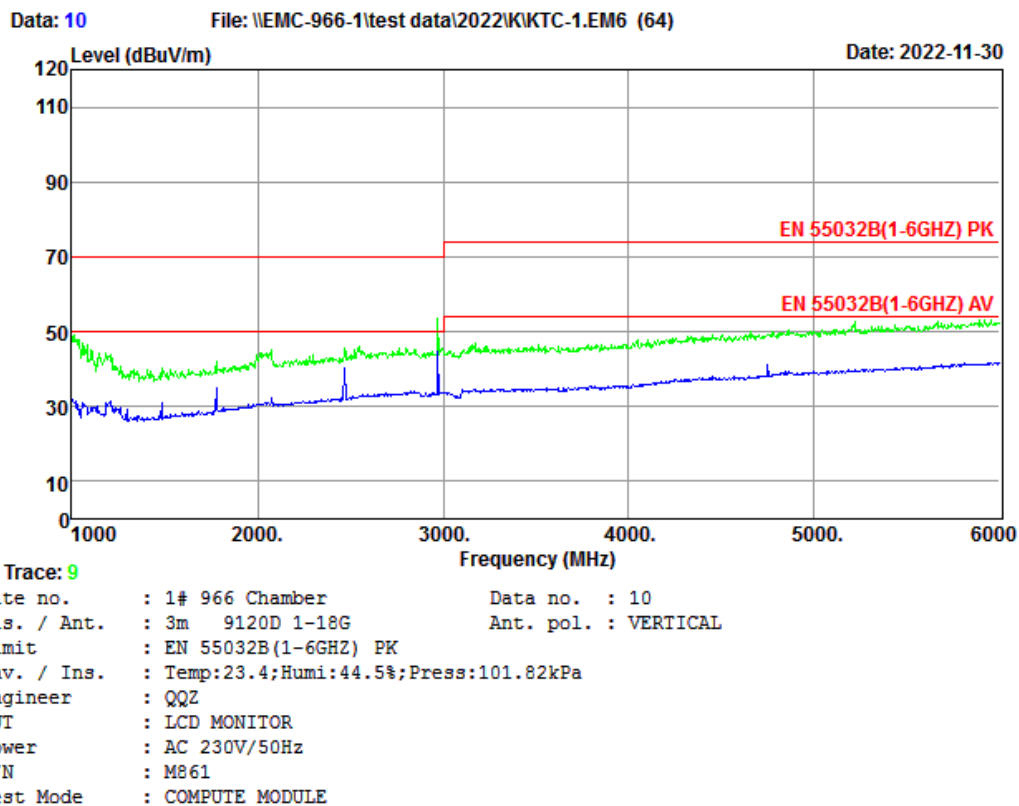

Data: 12

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

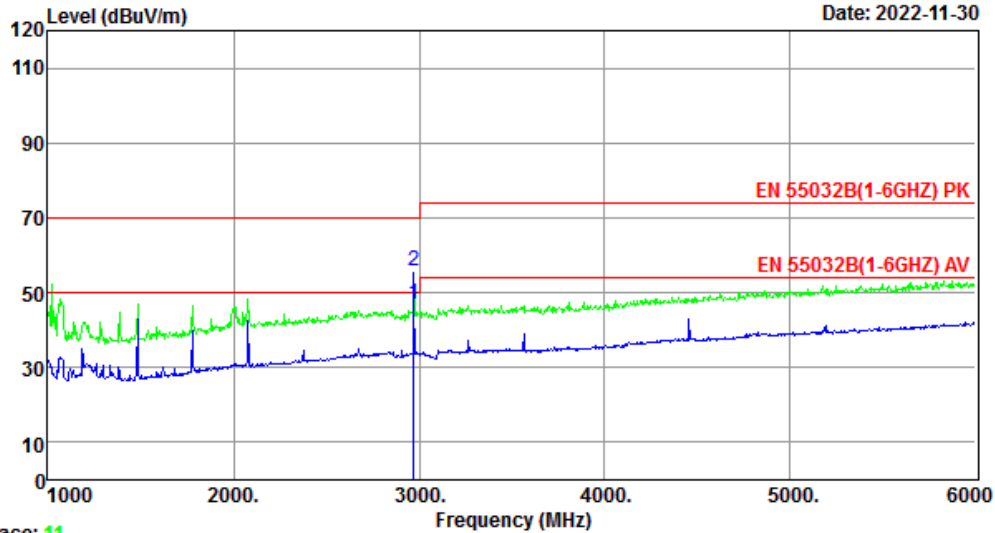

Trace: 11

Site no. : 1# 966 Chamber Data no. : 12
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : COMPUTE MODULE


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.24	47.05	50.00	2.95	Average
2	2970.00	28.99	3.82	23.12	55.93	70.00	14.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 14

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

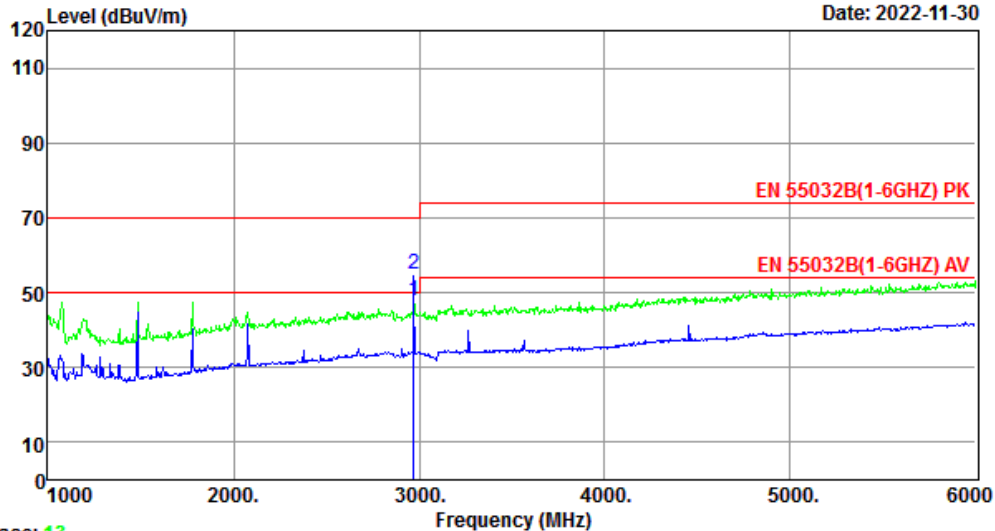

Trace: 13

Site no. : 1# 966 Chamber Data no. : 14
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : COMPUTE MODULE


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.83	47.64	50.00	2.36	Average
2	2970.00	28.99	3.82	22.03	54.84	70.00	15.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 16

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

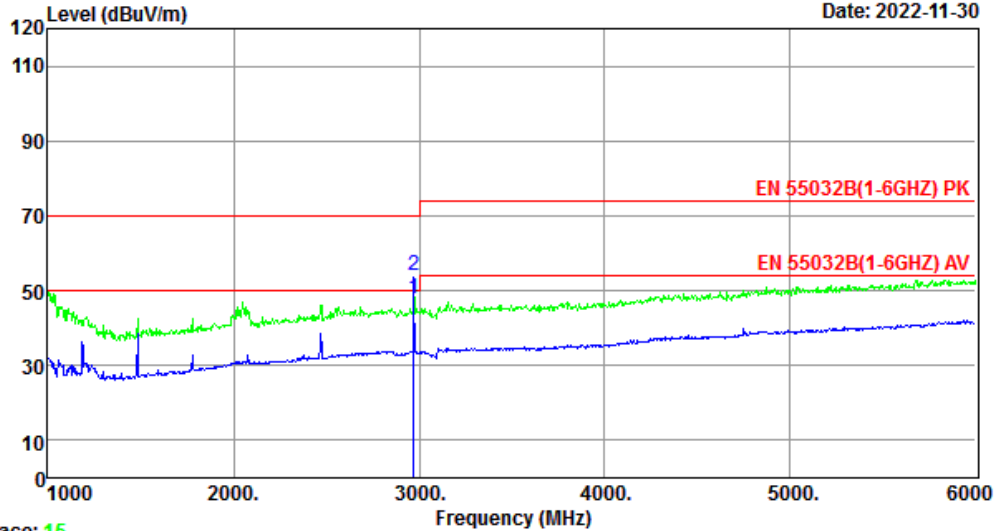

Site no. : 1# 966 Chamber Data no. : 16
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : COMPUTE MODULE


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.95	47.76	50.00	2.24	Average
2	2970.00	28.99	3.82	21.04	53.85	70.00	16.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 18

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

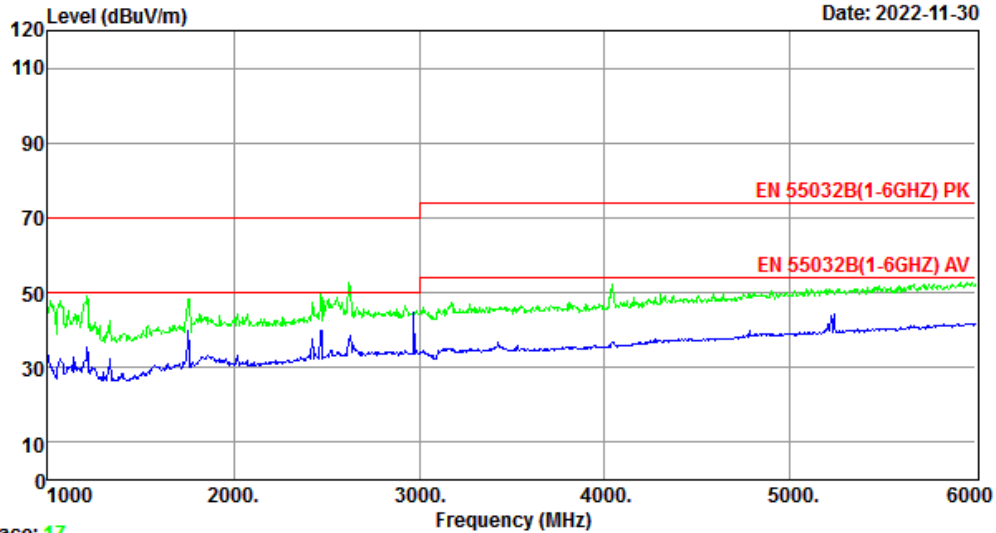


Trace: 17

Site no. : 1# 966 Chamber Data no. : 18
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 20

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-07

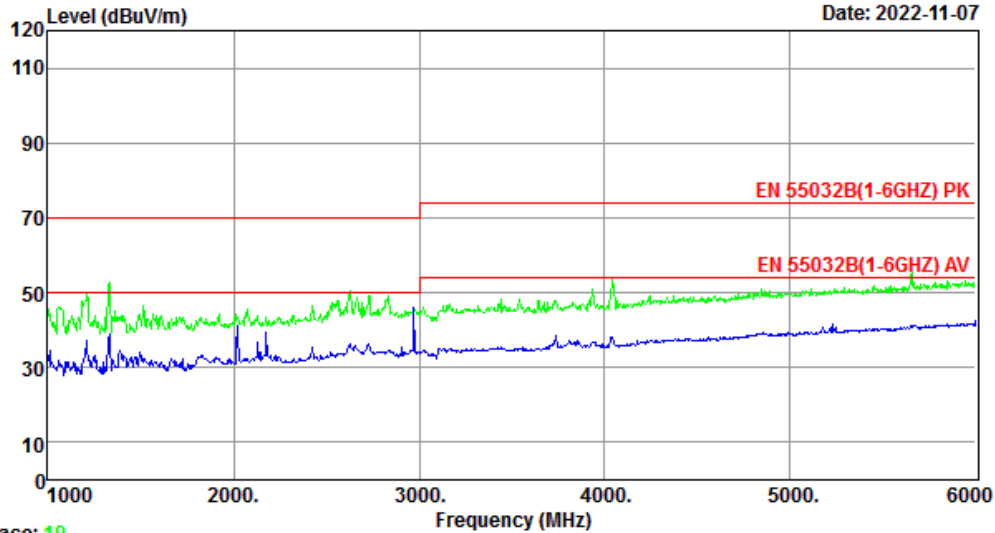


Trace: 19
Site no. : 1# 966 Chamber Data no. : 20
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 22

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-07

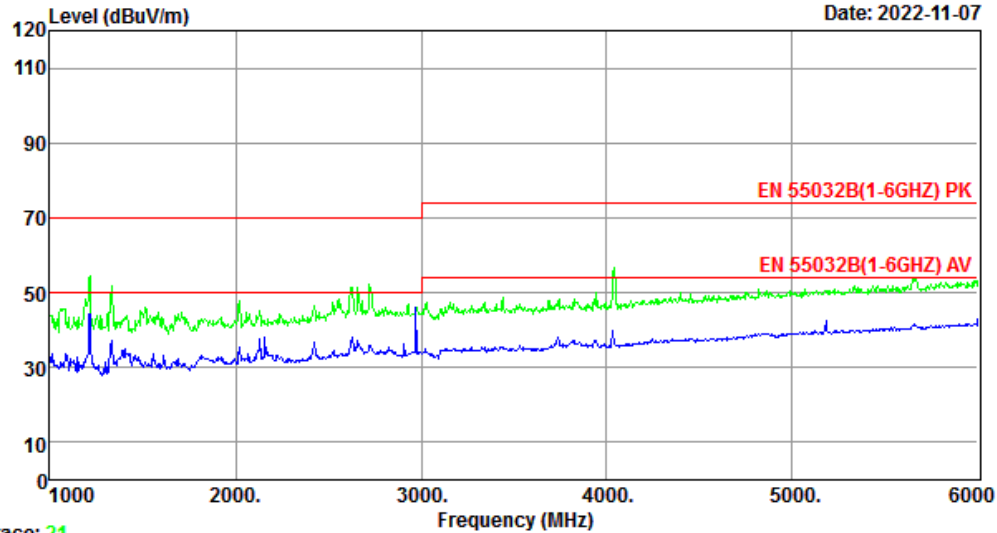


Trace: 21

Site no. : 1# 966 Chamber Data no. : 22
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 24

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-07

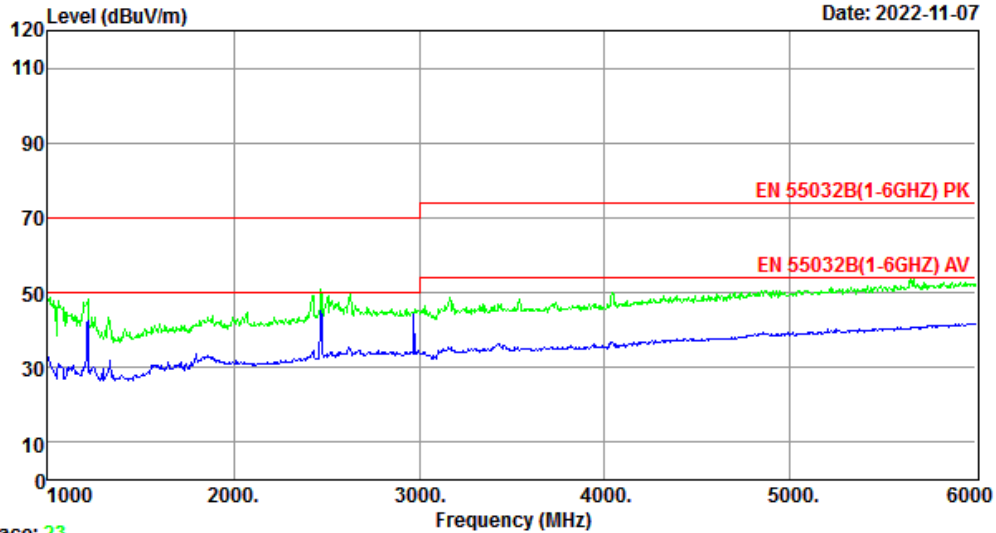


Trace: 23

Site no. : 1# 966 Chamber Data no. : 24
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP1 Mode (3840*2160)

Data: 26

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

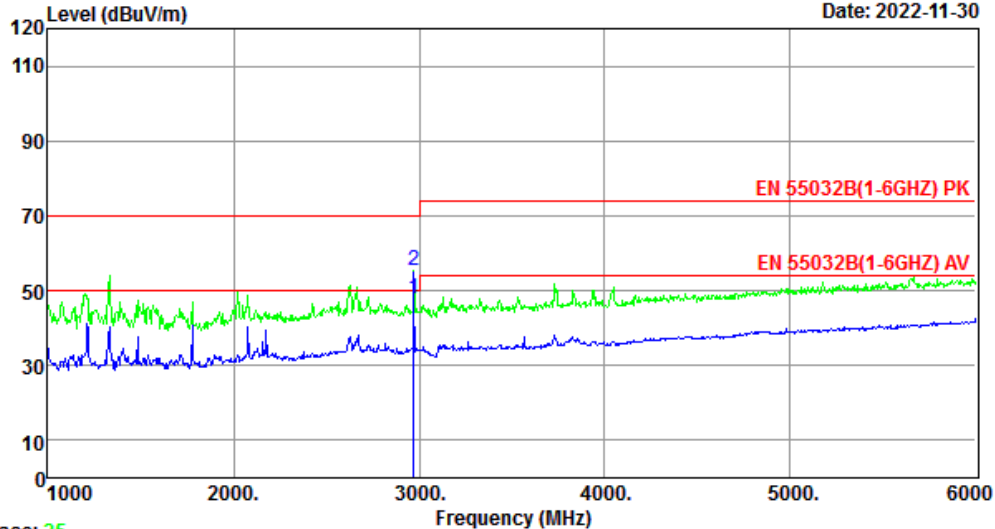

Trace: 25

Site no. : 1# 966 Chamber Data no. : 26
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	15.09	47.90	50.00	2.10	Average
2	2970.00	28.99	3.82	22.35	55.16	70.00	14.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 28

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

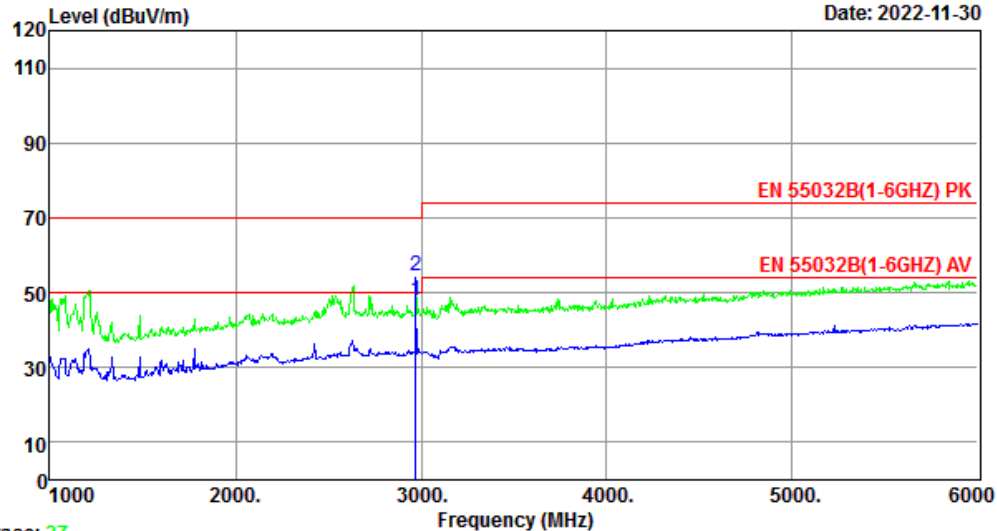

Site no. : 1# 966 Chamber Data no. : 28
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	15.09	47.90	50.00	2.10	Average
2	2970.00	28.99	3.82	21.54	54.35	70.00	15.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 30

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

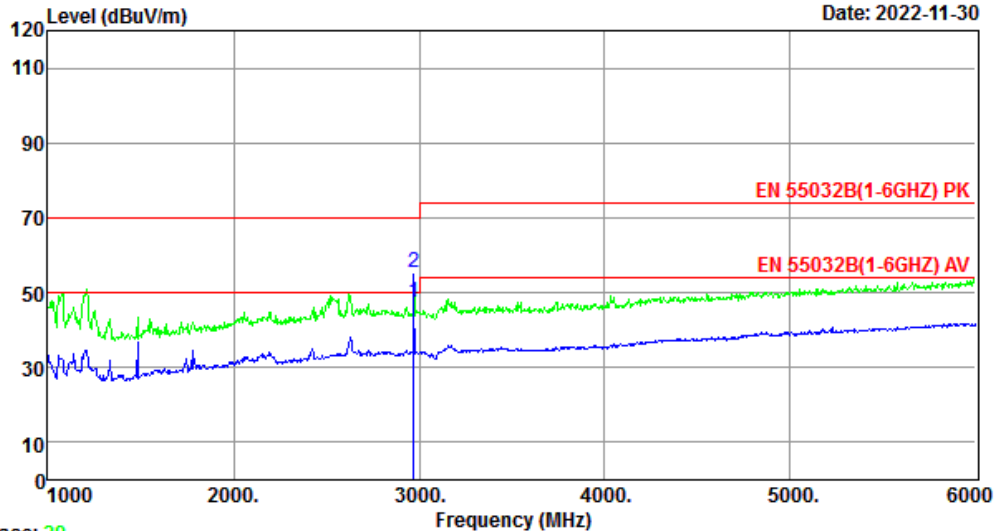

Trace: 29

Site no. : 1# 966 Chamber Data no. : 30
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.47	47.28	50.00	2.72	Average
2	2970.00	28.99	3.82	22.32	55.13	70.00	14.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 32

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

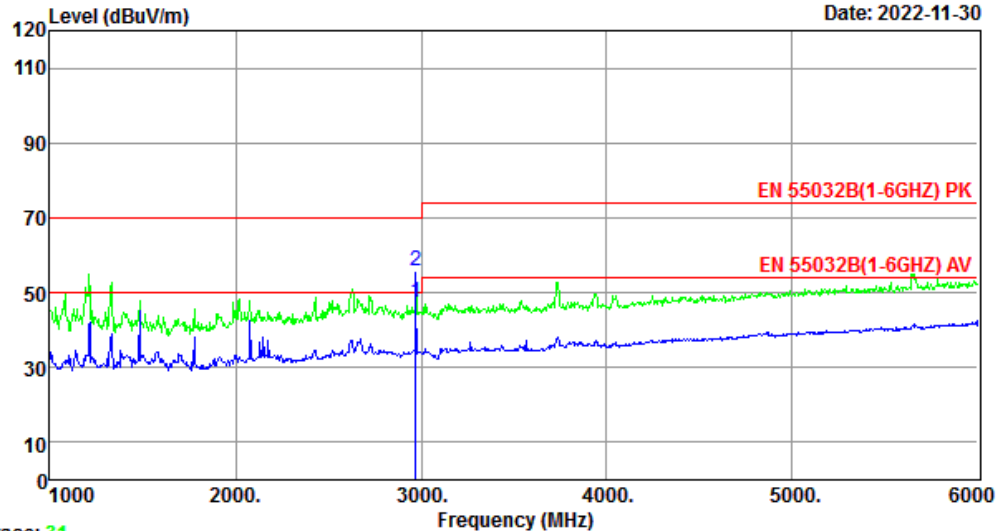


Trace: 31

Site no. : 1# 966 Chamber Data no. : 32
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : DP2 Mode (3840*2160)

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.62	47.43	50.00	2.57	Average
2	2970.00	28.99	3.82	22.85	55.66	70.00	14.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

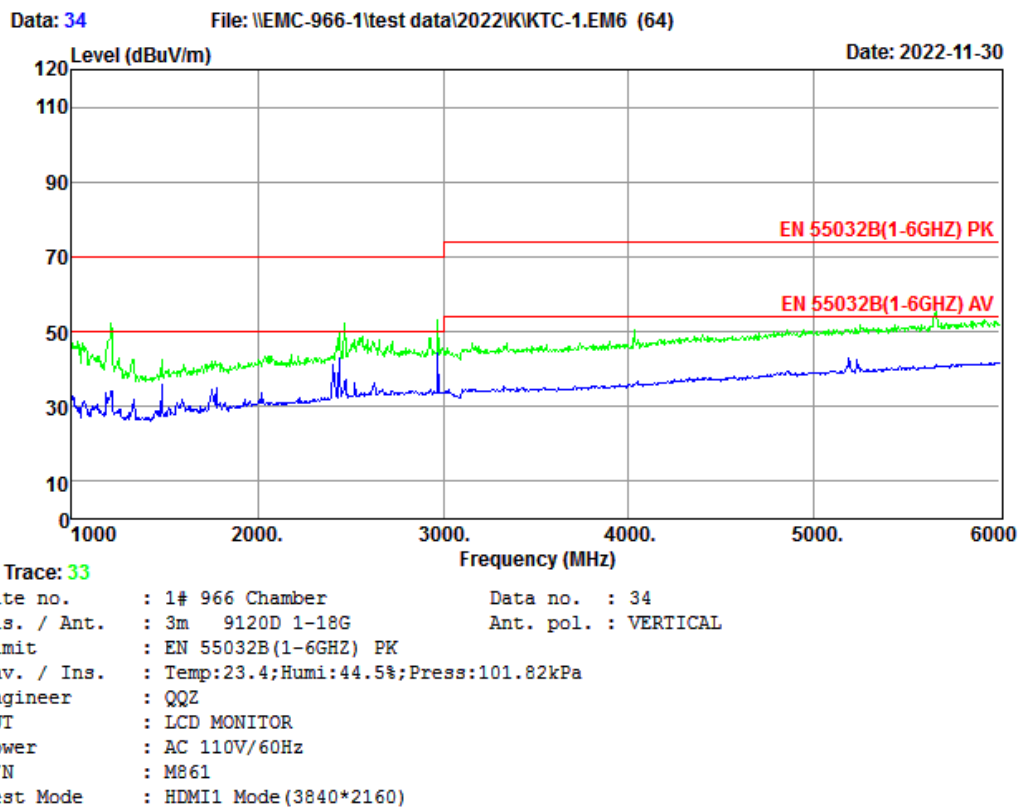

Data: 36

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

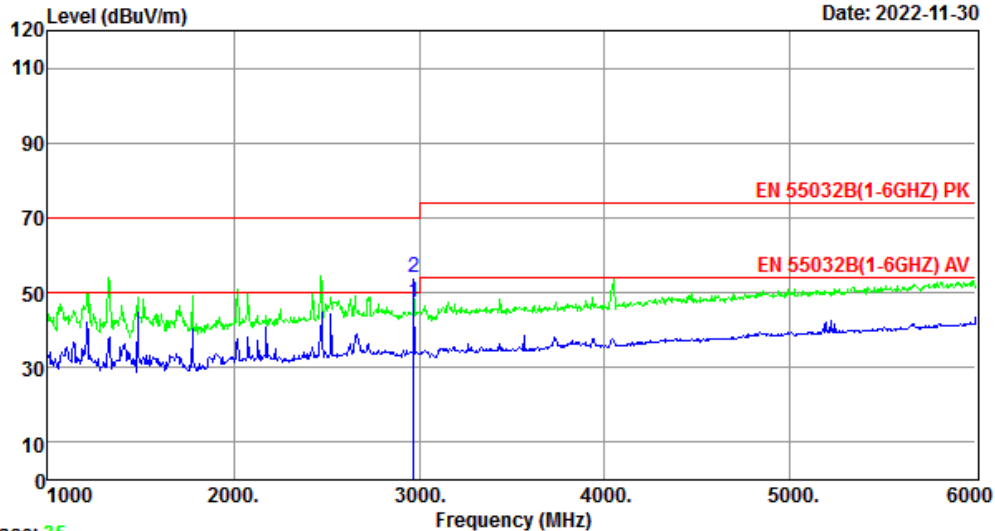

Trace: 35

Site no. : 1# 966 Chamber Data no. : 36
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : HDMI1 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.38	47.19	50.00	2.81	Average
2	2970.00	28.99	3.82	21.33	54.14	70.00	15.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 38

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

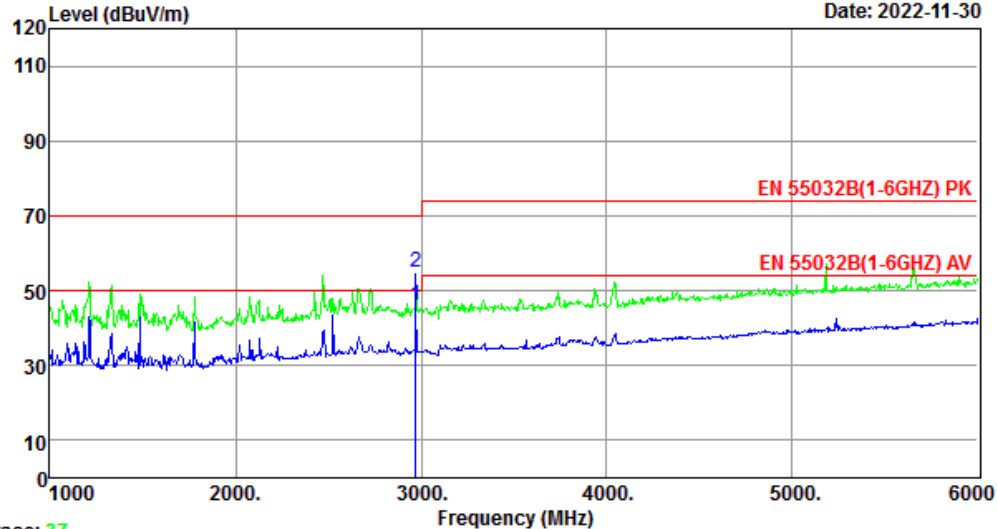

Site no. : 1# 966 Chamber Data no. : 38
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI1 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	13.46	46.27	50.00	3.73	Average
2	2970.00	28.99	3.82	22.06	54.87	70.00	15.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 40

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

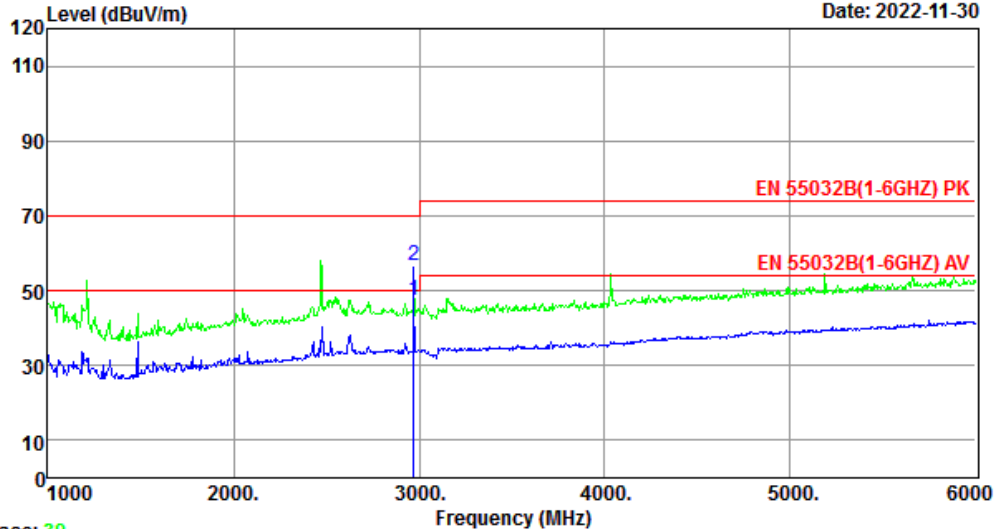

Site no. : 1# 966 Chamber Data no. : 40
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI1 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.50	47.31	50.00	2.69	Average
2	2970.00	28.99	3.82	23.65	56.46	70.00	13.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 42

File: \\EMC-966-1\\test data\\2022\\KKTC-1.EM6 (64)

Date: 2022-11-30

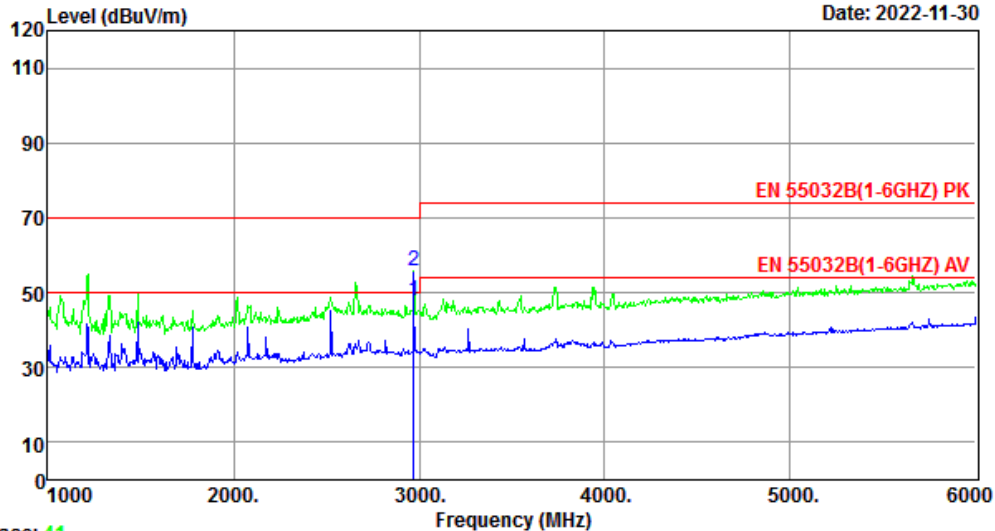

Site no. : 1# 966 Chamber Data no. : 42
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : HDMI2 Mode (3840*2160)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.91	47.72	50.00	2.28	Average
2	2970.00	28.99	3.82	23.15	55.96	70.00	14.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 44

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)


Date: 2022-11-30

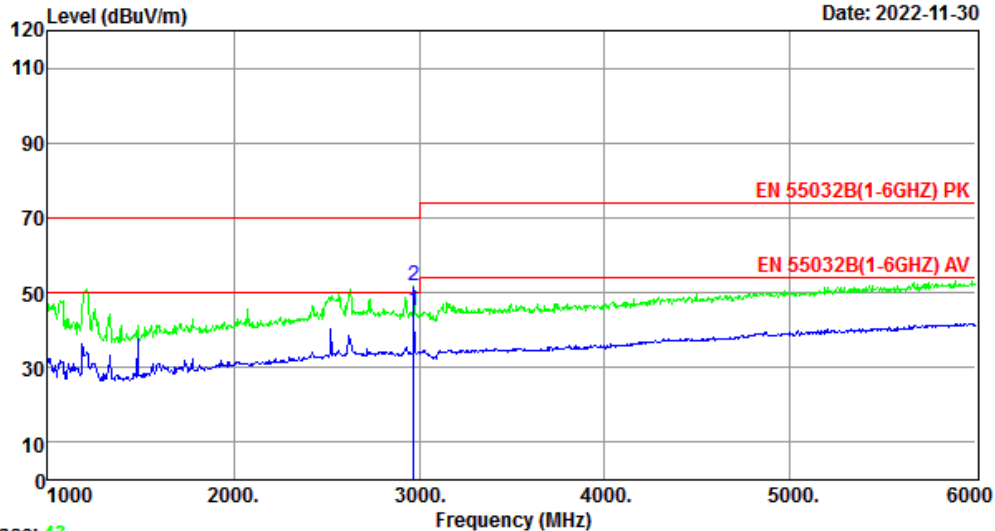

Site no. : 1# 966 Chamber Data no. : 44
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : HDMI2 Mode (3840*2160)

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	12.49	45.30	50.00	4.70	Average
2	2970.00	28.99	3.82	19.11	51.92	70.00	18.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

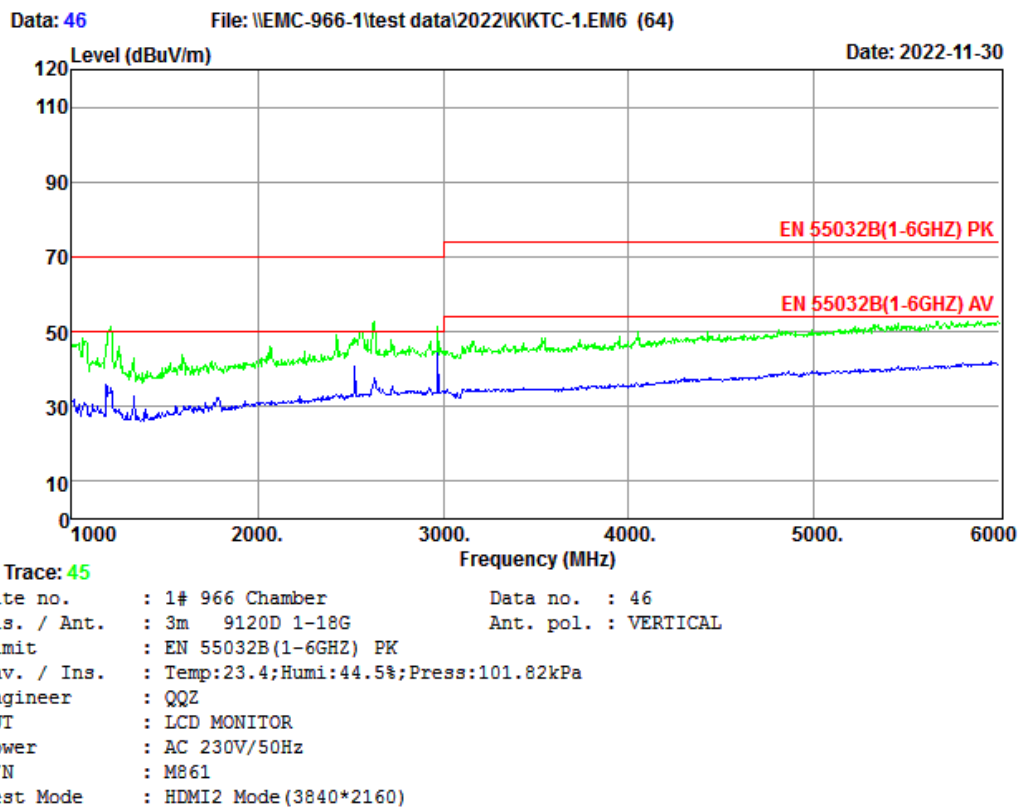

Data: 48

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

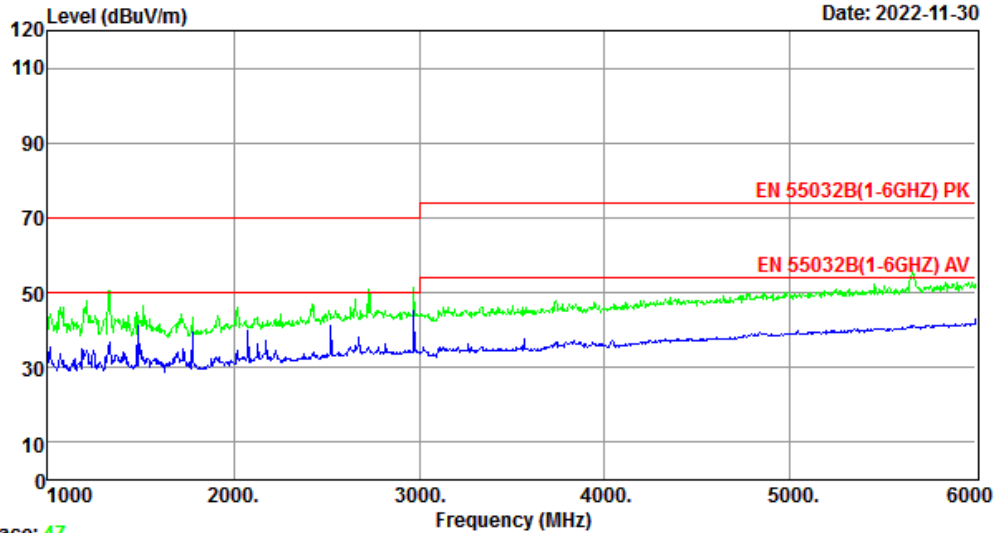


Trace: 47

Site no. : 1# 966 Chamber Data no. : 48
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : HDMI2 Mode (3840*2160)

Data: 50

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

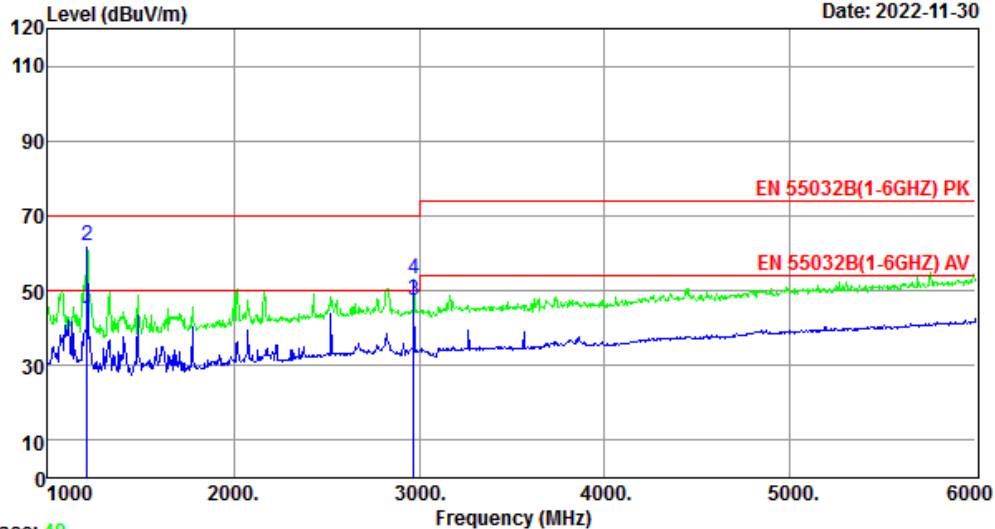

Site no. : 1# 966 Chamber Data no. : 50
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN1 Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.00	24.20	2.34	16.00	42.54	50.00	7.46	Average
2	1210.00	24.20	2.34	35.30	61.84	70.00	8.16	Peak
3	2970.00	28.99	3.82	14.58	47.39	50.00	2.61	Average
4	2970.00	28.99	3.82	20.16	52.97	70.00	17.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 52

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)


Date: 2022-11-30

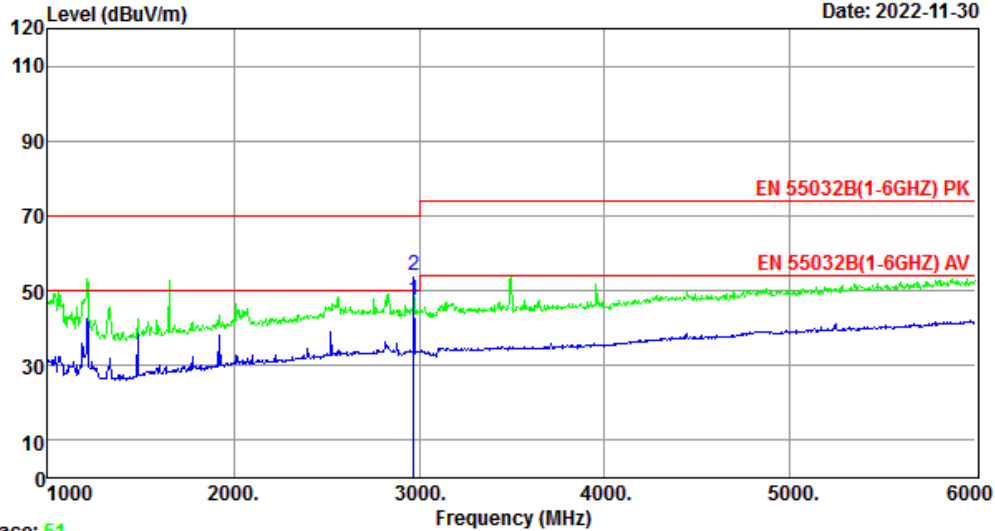

Site no. : 1# 966 Chamber Data no. : 52
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN1 Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2970.00	28.99	3.82	14.40	47.21	50.00	2.79	Average
2	2970.00	28.99	3.82	21.15	53.96	70.00	16.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

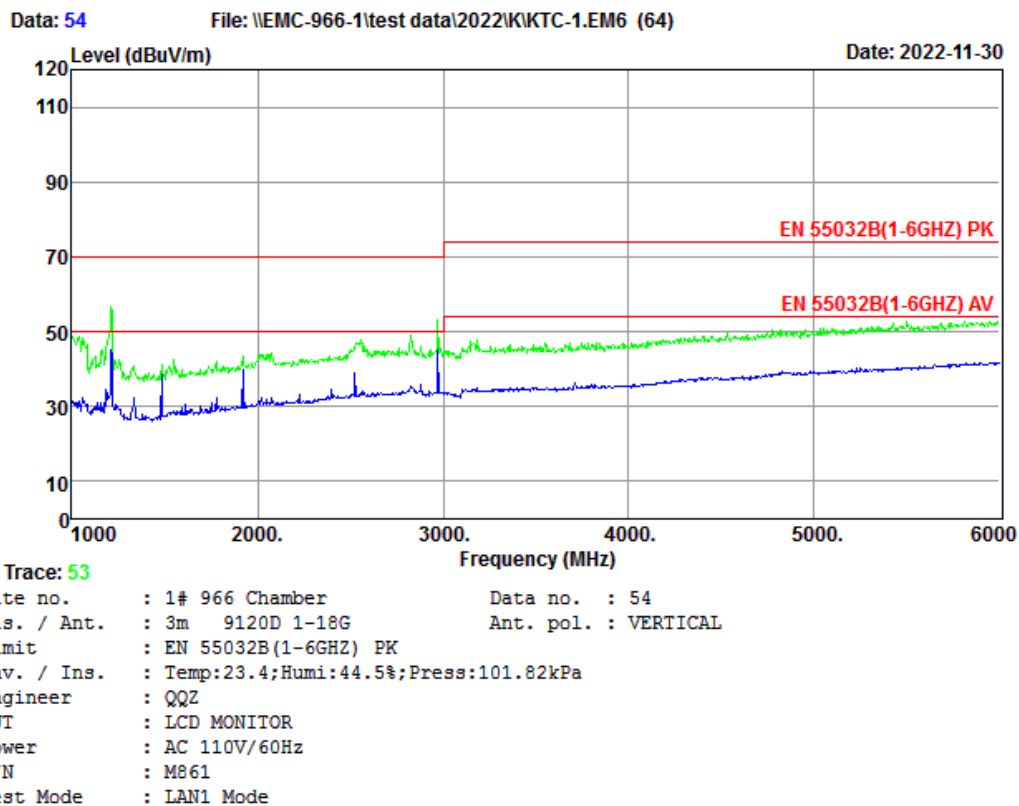

Data: 56

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

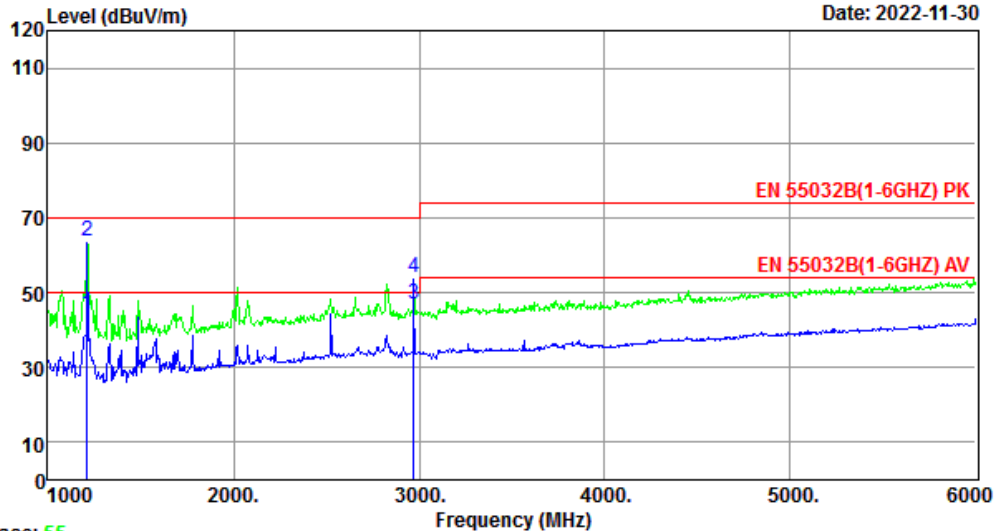

Site no. : 1# 966 Chamber Data no. : 56
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : M861
Test Mode : LAN1 Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.00	24.20	2.34	17.87	44.41	50.00	5.59	Average
2	1210.00	24.20	2.34	37.30	63.84	70.00	6.16	Peak
3	2970.00	28.99	3.82	14.32	47.13	50.00	2.87	Average
4	2970.00	28.99	3.82	21.32	54.13	70.00	15.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 58

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

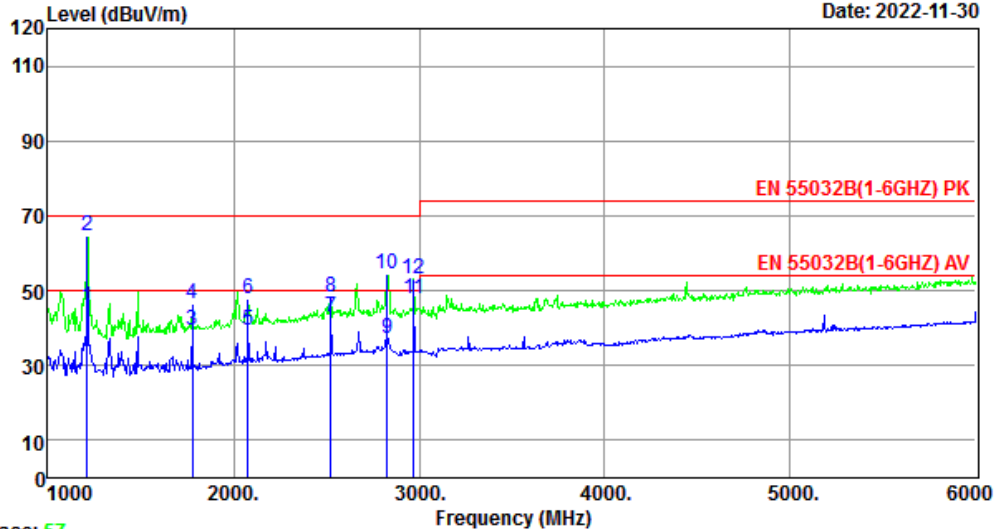

Trace: 57

Site no. : 1# 966 Chamber Data no. : 58
 Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : EN 55032B(1-6GHz) PK
 Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
 Engineer : QQZ
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : M861
 Test Mode : LAN2 Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.00	24.20	2.34	18.99	45.53	50.00	4.47	Average
2	1210.00	24.20	2.34	38.12	64.66	70.00	5.34	Peak
3	1780.00	25.38	3.03	11.15	39.56	50.00	10.44	Average
4	1780.00	25.38	3.03	18.13	46.54	70.00	23.46	Peak
5	2080.00	26.92	3.34	9.14	39.40	50.00	10.60	Average
6	2080.00	26.92	3.34	17.52	47.78	70.00	22.22	Peak
7	2525.00	27.61	3.54	11.61	42.76	50.00	7.24	Average
8	2525.00	27.61	3.54	17.15	48.30	70.00	21.70	Peak
9	2830.00	28.57	3.73	4.85	37.15	50.00	12.85	Average
10	2830.00	28.57	3.73	22.11	54.41	70.00	15.59	Peak
11	2970.00	28.99	3.82	15.15	47.96	50.00	2.04	Average
12	2970.00	28.99	3.82	20.32	53.13	70.00	16.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 60

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

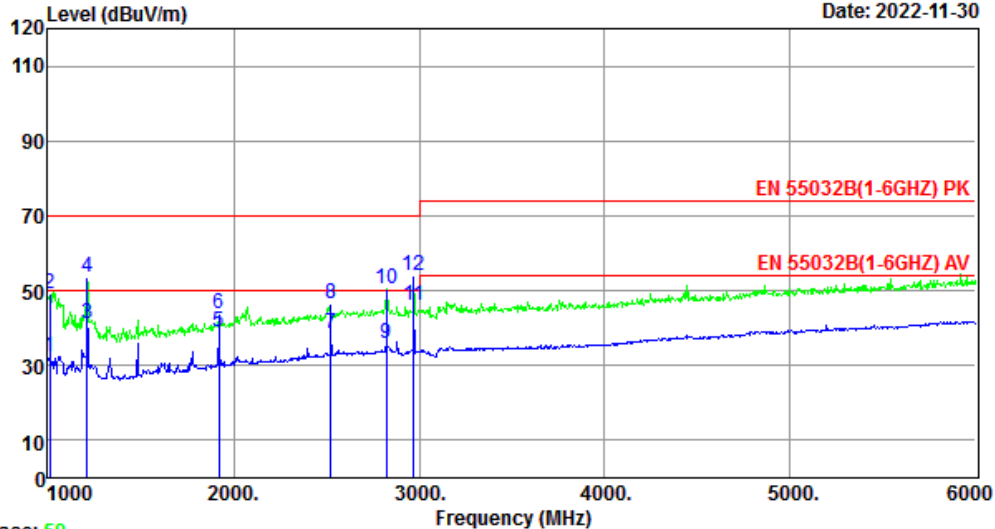

Trace: 59
 Site no. : 1# 966 Chamber Data no. : 60
 Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
 Limit : EN 55032B(1-6GHZ) PK
 Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
 Engineer : QQZ
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : M861
 Test Mode : LAN2 Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1010.00	24.02	2.13	6.38	32.53	50.00	17.47	Average
2	1010.00	24.02	2.13	23.16	49.31	70.00	20.69	Peak
3	1210.00	24.20	2.34	14.56	41.10	50.00	8.90	Average
4	1210.00	24.20	2.34	26.85	53.39	70.00	16.61	Peak
5	1920.00	26.22	3.19	9.54	38.95	50.00	11.05	Average
6	1920.00	26.22	3.19	14.31	43.72	70.00	26.28	Peak
7	2525.00	27.61	3.54	7.29	38.44	50.00	11.56	Average
8	2525.00	27.61	3.54	15.34	46.49	70.00	23.51	Peak
9	2825.00	28.51	3.72	3.51	35.74	50.00	14.26	Average
10	2825.00	28.51	3.72	18.32	50.55	70.00	19.45	Peak
11	2970.00	28.99	3.82	13.46	46.27	50.00	3.73	Average
12	2970.00	28.99	3.82	21.31	54.12	70.00	15.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 62

File: \\EMC-966-1\\test data\\2022\\KIKTC-1.EM6 (64)

Date: 2022-11-30

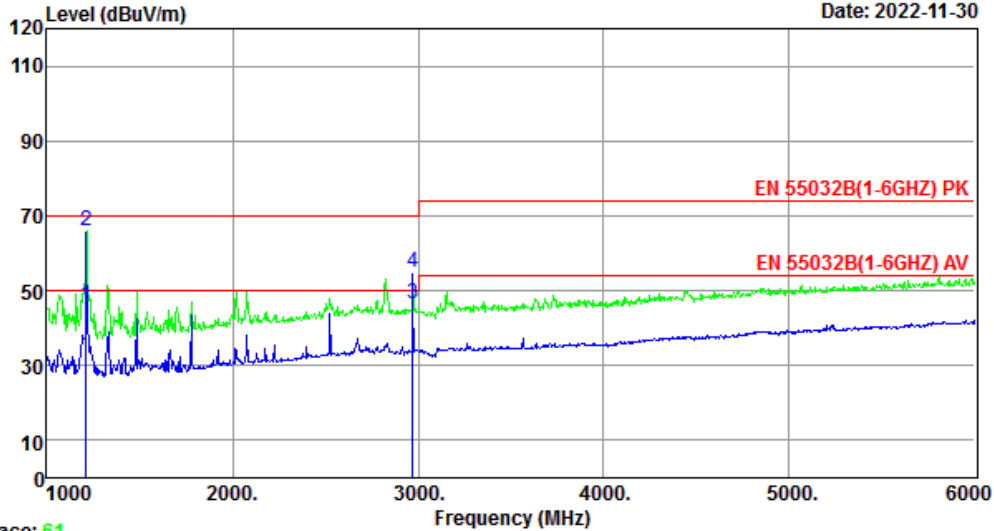

Site no. : 1# 966 Chamber Data no. : 62
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN2 Mode


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.00	24.20	2.34	19.40	45.94	50.00	4.06	Average
2	1210.00	24.20	2.34	39.60	66.14	70.00	3.86	Peak
3	2970.00	28.99	3.82	13.53	46.34	50.00	3.66	Average
4	2970.00	28.99	3.82	22.13	54.94	70.00	15.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Data: 64

File: \\EMC-966-1\test data\2022\KIKTC-1.EM6 (64)

Date: 2022-11-30

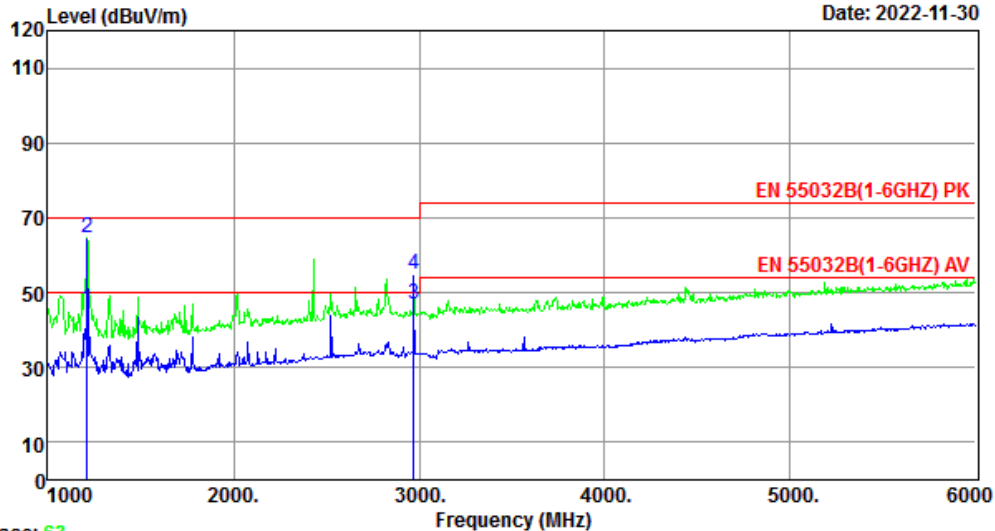


Site no. : 1# 966 Chamber Data no. : 64
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:23.4;Humi:44.5%;Press:101.82kPa
Engineer : QQZ
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : M861
Test Mode : LAN2 Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1210.00	24.20	2.34	18.89	45.43	50.00	4.57	Average
2	1210.00	24.20	2.34	38.16	64.70	70.00	5.30	Peak
3	2970.00	28.99	3.82	14.34	47.15	50.00	2.85	Average
4	2970.00	28.99	3.82	22.24	55.05	70.00	14.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

4.5. Harmonic Current Emissions on AC Mains Test

RESULT : **Pass**
Test procedure : EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021
Measured harmonics : 1~40th
Limits : EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021

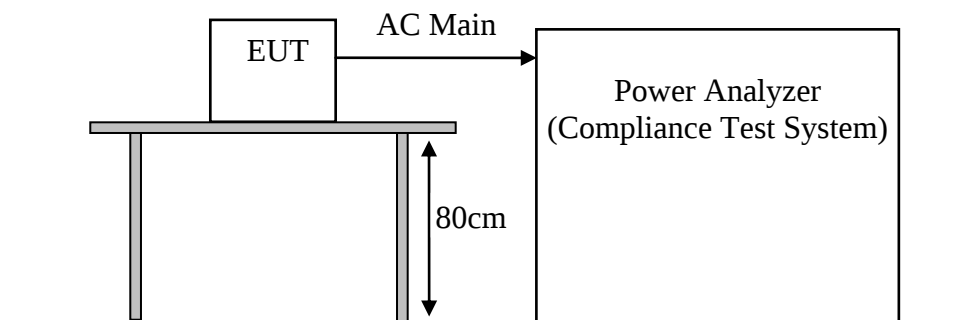

Test Data

EUT: LCD MONITOR M/N:M861

Test category: Class-D (European limits)

Test date: 2022/11/30

Start time: 10:09:15

Tested by: TANK

Test Margin: 100

End time: 10:11:57

Test duration (min): 2.5

Data file name: H-000523.cts_data


Comment: HDMI1 MODE(3840*2160) WORST CASE OPERATING MODE

Customer: KTC

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

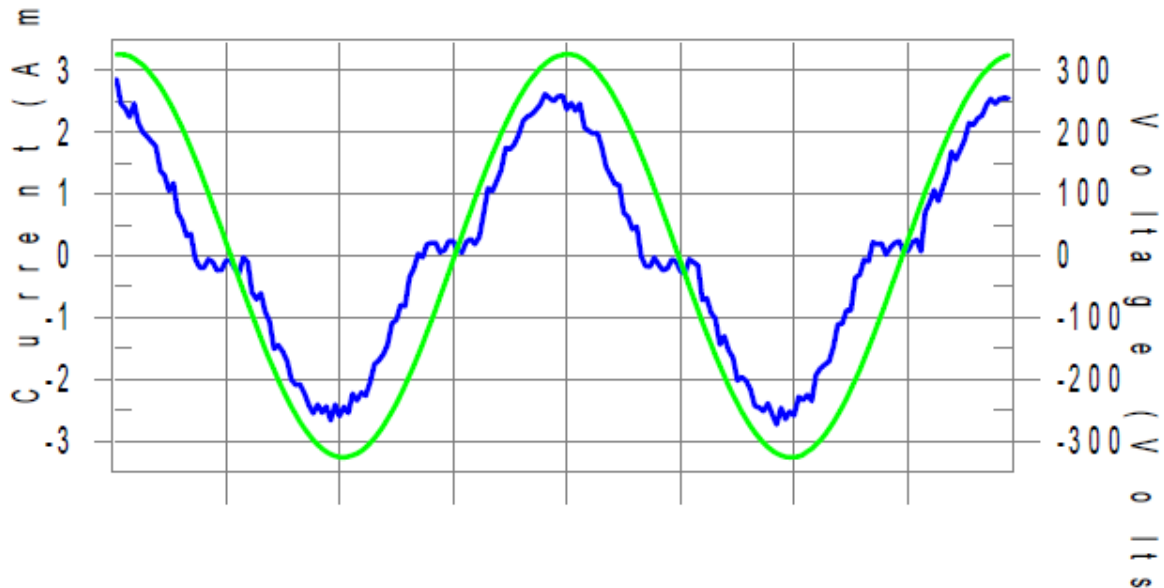

Harmonics and Class D limit line

European Limits

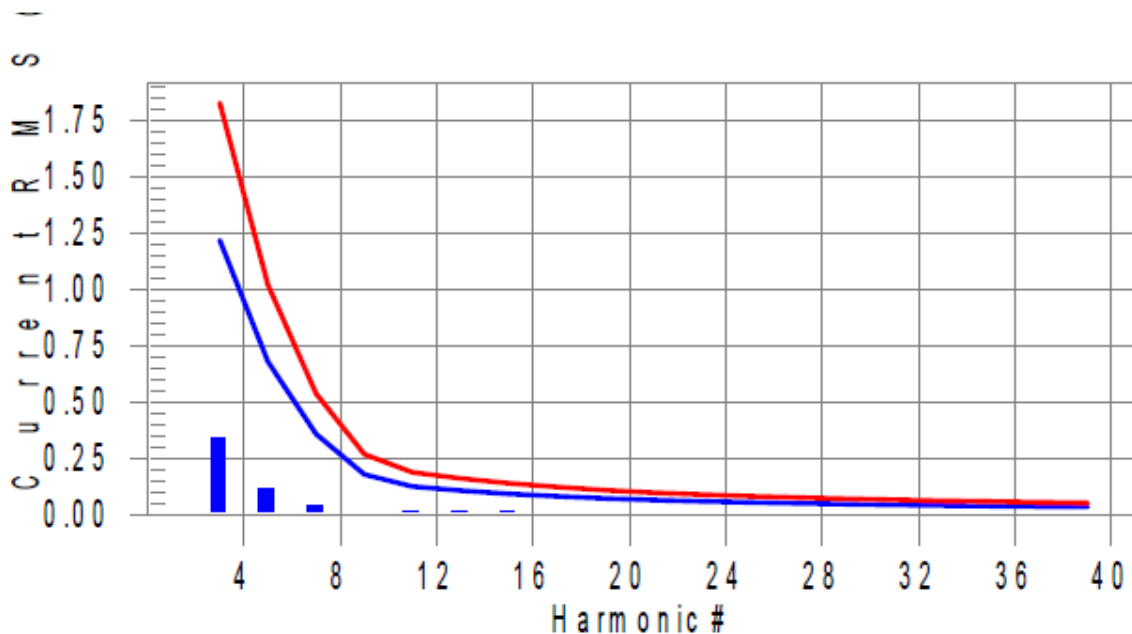

Test result: Pass Worst harmonics H3-18.8% of 150% limit, H3-28% of 100% limit

EUT: LCD MONITOR M/N:M861

Test category: Class-D (European limits)

Test date: 2022/11/30

Start time: 10:09:15

Tested by: TANK

Test Margin: 100

End time: 10:11:57

Test duration (min): 2.5

Data file name: H-000523.cts_data

Comment: HDMI1 MODE(3840*2160) WORST CASE OPERATING MODE

Customer: KTC

Test Result: Pass

Source qualification: Normal

THC(A): 0.364

I-THD(%): 23.1

POHC(A): 0.022

POHC Limit(A): 0.154

Highest parameter values during test:

V_RMS (Volts): 230.72

I_Peak (Amps): 2.986

I_Fund (Amps): 1.579

Power (Watts): 357.8

Frequency(Hz): 50.00

I_RMS (Amps): 1.647

Crest Factor: 1.852

Power Factor: 0.956

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.003	0.000	N/A	0.004	0.000	N/A	Pass
3	0.341	1.217	28.0	0.342	1.825	18.8	Pass
4	0.001	0.000	N/A	0.001	0.000	N/A	Pass
5	0.115	0.680	17.0	0.117	1.020	11.5	Pass
6	0.001	0.000	N/A	0.001	0.000	N/A	Pass
7	0.044	0.358	12.4	0.045	0.537	8.4	Pass
8	0.001	0.000	N/A	0.002	0.000	N/A	Pass
9	0.008	0.179	N/A	0.009	0.268	N/A	Pass
10	0.001	0.000	N/A	0.001	0.000	N/A	Pass
11	0.013	0.125	10.1	0.014	0.188	7.2	Pass
12	0.001	0.000	N/A	0.001	0.000	N/A	Pass
13	0.016	0.107	14.9	0.017	0.161	10.4	Pass
14	0.001	0.000	N/A	0.001	0.000	N/A	Pass
15	0.016	0.093	16.8	0.017	0.140	11.9	Pass
16	0.001	0.000	N/A	0.001	0.000	N/A	Pass
17	0.009	0.082	N/A	0.010	0.123	N/A	Pass
18	0.001	0.000	N/A	0.001	0.000	N/A	Pass
19	0.004	0.073	N/A	0.005	0.109	N/A	Pass
20	0.001	0.000	N/A	0.002	0.000	N/A	Pass
21	0.008	0.065	N/A	0.008	0.098	N/A	Pass
22	0.001	0.000	N/A	0.001	0.000	N/A	Pass
23	0.010	0.060	16.5	0.011	0.090	12.2	Pass
24	0.001	0.000	N/A	0.002	0.000	N/A	Pass
25	0.008	0.055	N/A	0.009	0.083	N/A	Pass
26	0.001	0.000	N/A	0.002	0.000	N/A	Pass
27	0.005	0.051	N/A	0.006	0.077	N/A	Pass
28	0.004	0.000	N/A	0.004	0.000	N/A	Pass
29	0.006	0.048	N/A	0.007	0.071	N/A	Pass
30	0.001	0.000	N/A	0.001	0.000	N/A	Pass
31	0.007	0.044	N/A	0.010	0.067	N/A	Pass
32	0.003	0.000	N/A	0.004	0.000	N/A	Pass
33	0.007	0.042	N/A	0.009	0.062	N/A	Pass
34	0.001	0.000	N/A	0.002	0.000	N/A	Pass
35	0.005	0.039	N/A	0.006	0.059	N/A	Pass
36	0.001	0.000	N/A	0.001	0.000	N/A	Pass
37	0.005	0.037	N/A	0.005	0.056	N/A	Pass
38	0.001	0.000	N/A	0.001	0.000	N/A	Pass
39	0.006	0.035	N/A	0.006	0.053	N/A	Pass
40	0.001	0.000	N/A	0.001	0.000	N/A	Pass

Note: Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

EUT: LCD MONITOR M/N:M861

Test category: Class-D (European limits)

Test date: 2022/11/30

Start time: 10:09:15

Test duration (min): 2.5

Data file name: H-000523.cts_data

Comment: HDMI1 MODE(3840*2160) WORST CASE OPERATING MODE

Customer: KTC

Tested by: TANK

Test Margin: 100

End time: 10:11:57

Test Result: Pass

Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms): 230.72

Frequency(Hz): 50.00

I_Peak (Amps): 2.986

I_RMS (Amps): 1.647

I_Fund (Amps): 1.579

Crest Factor: 1.852


Power (Watts): 357.8

Power Factor: 0.956

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.058	0.461	12.59	OK
3	0.416	2.076	20.02	OK
4	0.050	0.461	10.74	OK
5	0.034	0.923	3.67	OK
6	0.024	0.461	5.25	OK
7	0.025	0.692	3.65	OK
8	0.027	0.461	5.75	OK
9	0.021	0.461	4.45	OK
10	0.022	0.461	4.67	OK
11	0.011	0.231	4.69	OK
12	0.012	0.231	5.25	OK
13	0.011	0.231	4.73	OK
14	0.009	0.231	4.00	OK
15	0.017	0.231	7.56	OK
16	0.011	0.231	4.84	OK
17	0.009	0.231	3.84	OK
18	0.011	0.231	4.57	OK
19	0.010	0.231	4.25	OK
20	0.012	0.231	5.06	OK
21	0.016	0.231	6.93	OK
22	0.008	0.231	3.52	OK
23	0.022	0.231	9.40	OK
24	0.008	0.231	3.60	OK
25	0.018	0.231	7.82	OK
26	0.008	0.231	3.43	OK
27	0.014	0.231	6.11	OK
28	0.009	0.231	3.84	OK
29	0.015	0.231	6.62	OK
30	0.008	0.231	3.68	OK
31	0.016	0.231	6.95	OK
32	0.007	0.231	2.92	OK
33	0.011	0.231	4.88	OK
34	0.008	0.231	3.33	OK
35	0.014	0.231	5.92	OK
36	0.005	0.231	2.29	OK
37	0.017	0.231	7.38	OK
38	0.005	0.231	2.28	OK
39	0.016	0.231	6.79	OK
40	0.010	0.231	4.23	OK

4.6. Voltage Fluctuations and Flicker on AC Mains Test

RESULT : **Pass**(Please refer to the following page)
Test procedure : EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021
Limits : EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021

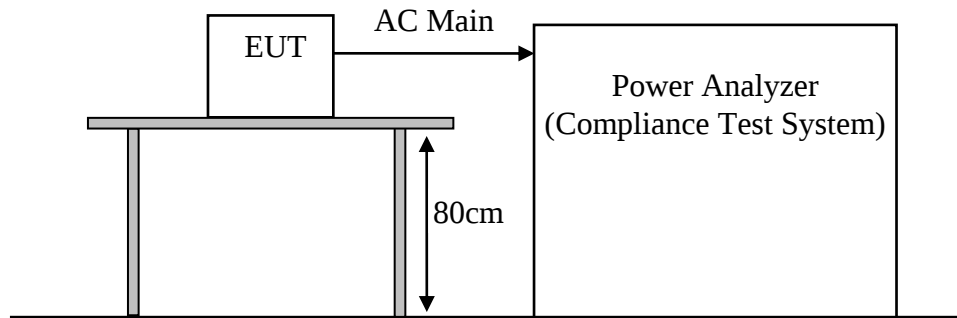

Test Data

EUT: LCD MONITOR M/N:M861

Test category: All parameters (European limits)

Test date: 2022/11/30

Start time: 9:52:04

Tested by: TANK

Test Margin: 100

End time: 10:02:32

Test duration (min): 10

Data file name: F-000521.cts_data

Comment: HDMI1 Mode(3840*2160) Worst Case Operating Mode


Customer: KTC

Test Result: Pass


Status: Test Completed

Pst and limit line

European Limits

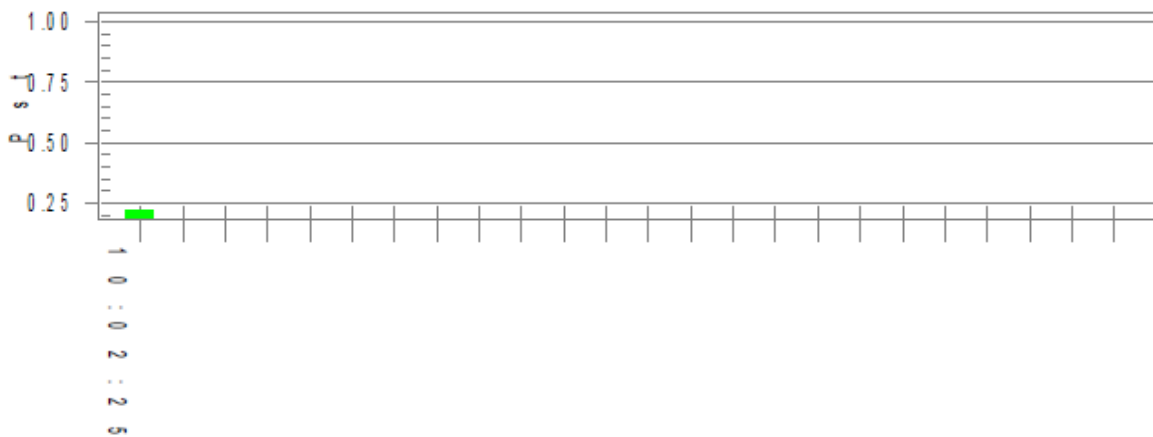

Plt and limit line

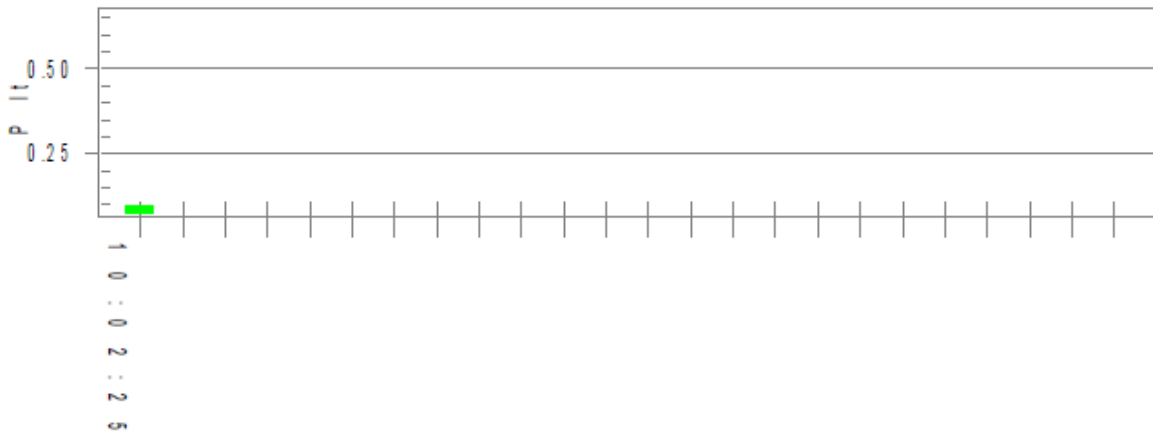

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.68

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.219

Highest Plt (2 hr. period): 0.096

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass



5. IMMUNITY TEST RESULT

5.1. Description of Performance Criteria:

Performance criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

For audio output device: The measured acoustic interference ratio and/or the measured electrical interference during the test shall be -20dB or better(see note1)

Performance criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Note 1: This performance criterion only using for Continuous inducted RF disturbances and Continuous RF electromagnetic field disturbances item.

5.2. Electrostatic Discharge Immunity Test

RESULT	: Pass
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-2:2009
Test specification	: +/-4.0kV(Contact discharge) +/-8.0kV(Air discharge)
Number of discharges	: ≥ 10 (Air discharge for single polarity discharge) ≥ 10 (Contact discharge for single polarity discharge)
Polarity	: Positive/Negative
Performance criterion	: B

Test Setup

Date of test	: Dec. 01, 2022
Model No.	: M861
Input Voltage	: AC 230V/50Hz, AC 110V/60Hz
Operation Mode	: HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode, LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE, OPTION Mode
Temperature	: 24.3°C
Humidity	: 51.2%
Pressure	: 101.2kPa

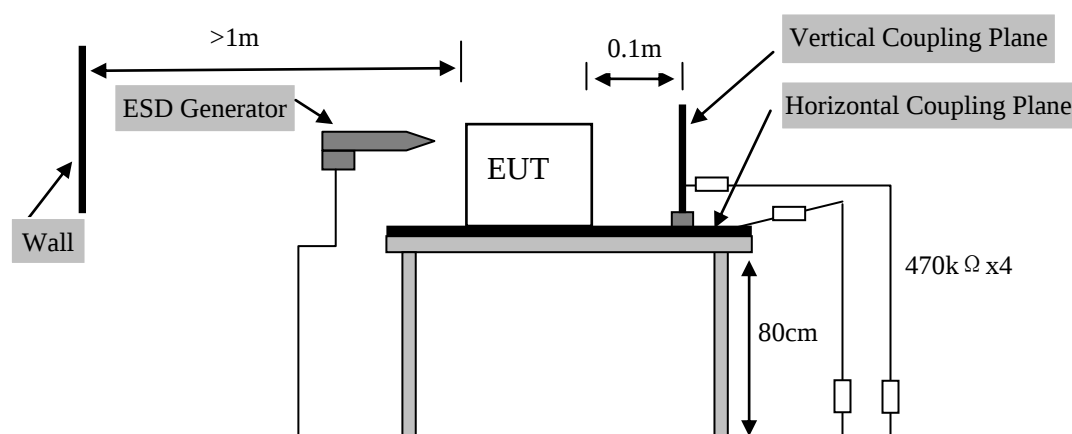


Table 1: Electrostatic Discharge Immunity Test Result

Discharge Location		Type of discharge	Result
HCP	4 points	Contact	Pass
VCP	4 points	Contact	Pass
Back Shroud	4 points	Contact	Pass
Screw	50 points	Contact	Pass
Crust	2 points	Contact	Pass
SPEAKER	4 points	Contact	Pass
LAN Port	2 points	Contact	Pass
DP Port	3 points	Contact	Pass
HDMI Port	3 points	Contact	Pass
USB Port	3 points	Contact	Pass
RS-232C	1 point	Contact	Pass
OPS	8 points	Contact	Pass
Screen	4 points	Air	Pass
AUDIO OUT	1 point	Air	Pass
Slots	4 points	Air	Pass

*Remark: 1. The screen was flashing during the test, but self-recoverable after the test
2. Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-3:2006+A1:2008+A2:2010
Frequency Range : 80-1000MHz,1800MHz, 2600MHz, 3500MHz, 5000MHz
Performance criterion : A
Test site : 866 Chamber

Test Setup


Date of test : Dec. 01, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode
Temperature : 24.7°C
Humidity : 51.3%
Pressure : 101.2kPa

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The EUT was set 3 m away from the transmitting antenna which was mounted on an antenna tower. Both horizontal and vertical polarization of the antenna were set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera was used to monitor EUT screen.

All the scanning conditions were as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	at least 3 seconds

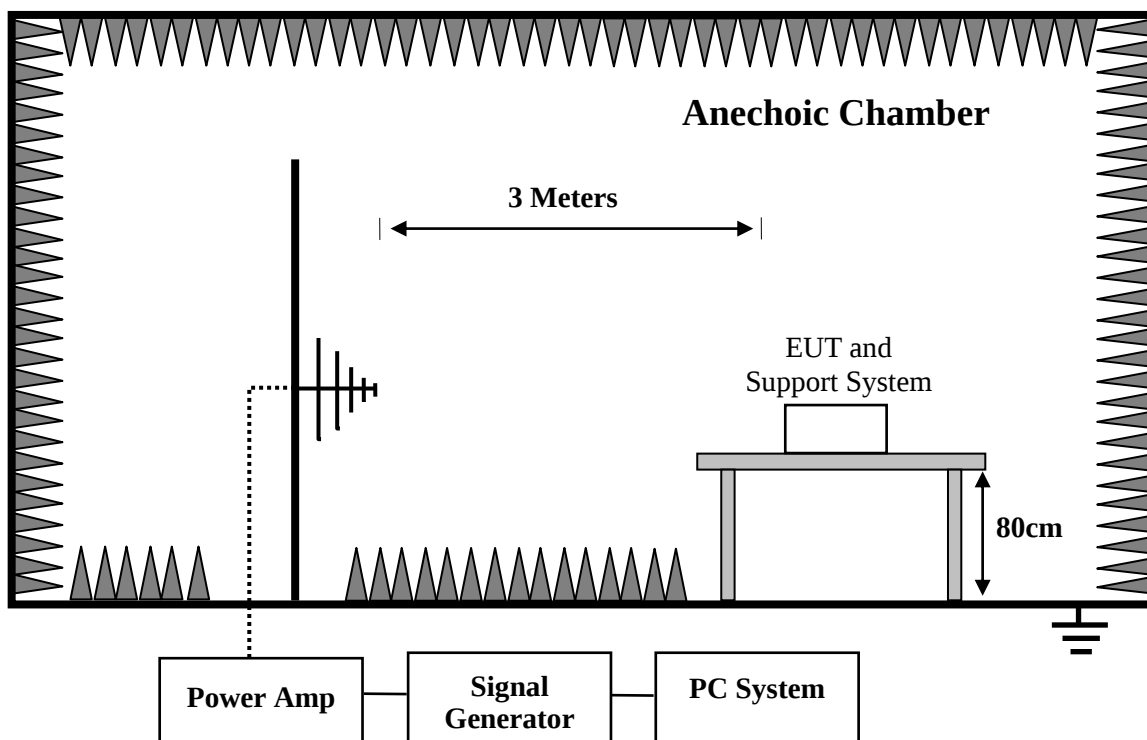

Condition of Test

Remarks

6. Field Strength	3 V/m (Severity Level 2)
7. Radiated Signal	Modulated
8. Scanning Frequency	1800MHz,2600MHz,3500MHz,5000MHz
9. Sweeping time of radiated	0.0015 decade/s
10. Dwell Time	at least 3 seconds

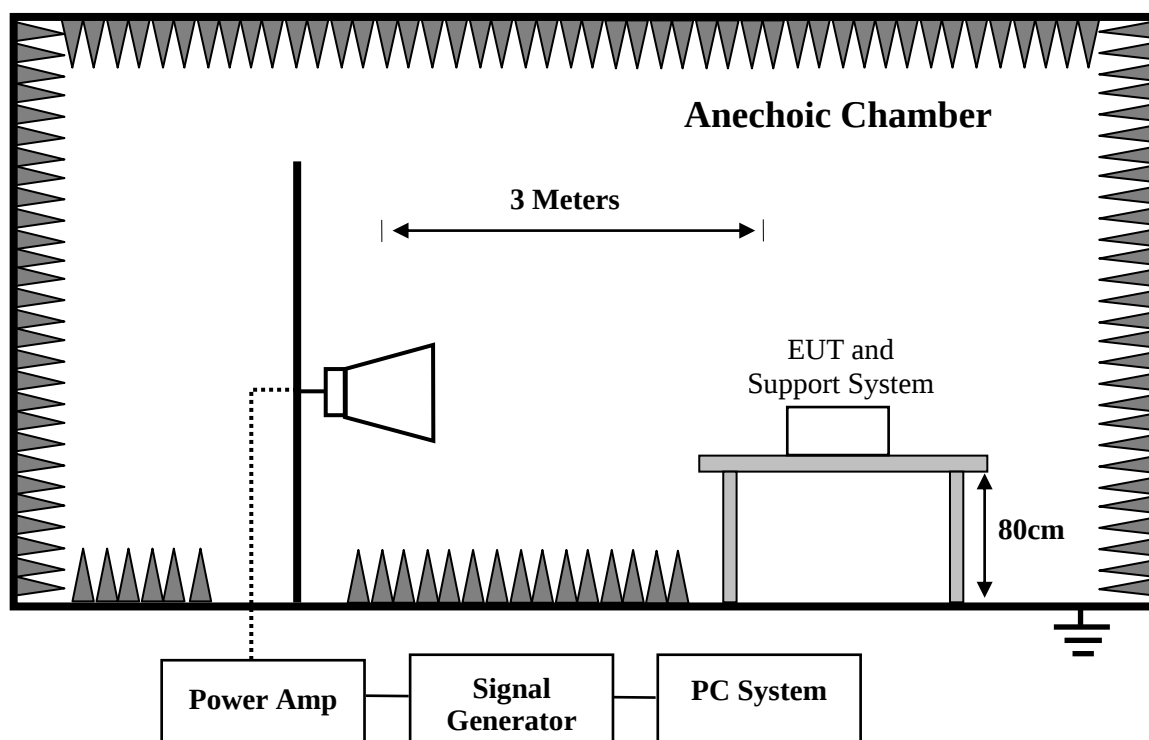


Table 2: Radio Frequency Electromagnetic Field Immunity Test Result

Field Strength (V/m)	Test Frequency (MHz)	Test mode (Worst)	Polarization of antenna	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	80-1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz	HDMI Mode	H	75dBSPL	Speaker	$\leq$ -20dB	-46 dB
			V	75dBSPL	Speaker		-49 dB

5.4. Electrical Fast Transient/Burst Immunity Test

RESULT	: Pass
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-4:2012
Pulseform	: Tr/Th=5/50ns
Repetition Frequency	: 5 kHz ; (100 kHz : only for single lines of xDSL equipment)
Test Duration	: 120s
Performance criterion	: B

Test Setup

Date of test	: Dec. 01, 2022
Model No.	: M861
Input Voltage	: AC 230V/50Hz, AC 110V/60Hz
Operation Mode	: HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode, LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE, OPTION Mode
Temperature	: 24.5°C
Humidity	: 51.1%
Pressure	: 101.2kPa

The EUT and its simulators were placed 0.1 m high above the ground reference plane which was a minimum 2m*2m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1 m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

1. For power input port:

The EUT was connected to the power mains by using a coupling device which coupled the EFT interference signal to AC power lines. Both polarities of the test voltage were applied during compliance test and the duration of the test were 2mins.

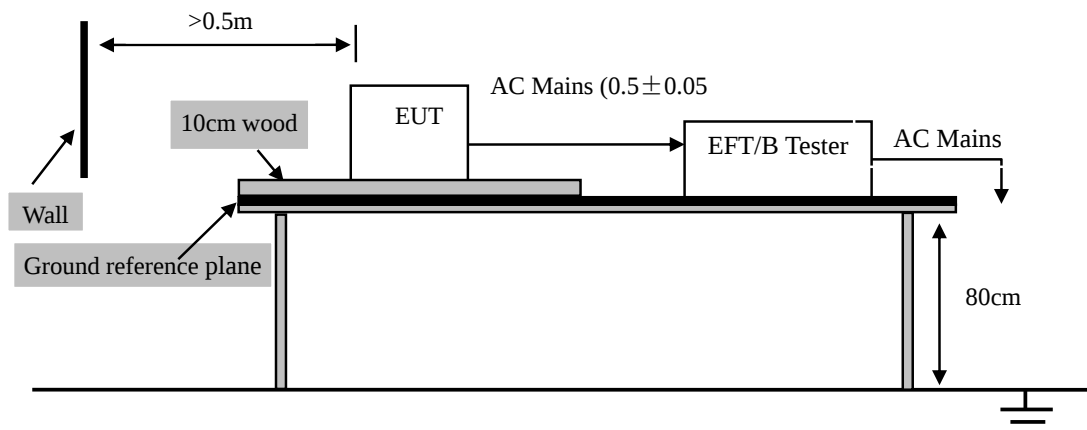


Table 5: Electrical Fast Transient/Burst Immunity Test Result

Coupling Ports		Coupling Voltage	Inject Method	Result
AC Power Ports	L	± 1 kV	Direct	Pass
	N	± 1 kV		Pass
	PE	± 1 kV		Pass
	L-N	± 1 kV		Pass
	L-PE	± 1 kV		Pass
	N-PE	± 1 kV		Pass
	L-N-PE	± 1 kV		Pass
Signal Line		± 0.5 kV		Pass

Remark: The screen was flashing during the test, but self-recoverable after the test

5.5. Surge Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-5:2014
Pulse form : $Tr/Td=1.2/50\mu s$
Test Duration : 60s
Performance criterion : B

Test Setup

Date of test : Dec. 01, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode
Temperature : 24.4°C
Humidity : 51.1%
Pressure : 101.2kPa

2Ω effective output impedance of the generator was used for L-N test. 12Ω effective output impedance of the generator was used for L-PE, N-PE test.

5 positive and 5 negative (polarity) tests were applied successively synchronized to the voltage phase 90° , 270° to L-N respectively. The repetition rate was 1 per minute during test.

1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device which coupled the surge interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration was 1 minute.

2. For signal lines and control lines ports:

None.

3. For DC input and DC output power ports:

None.

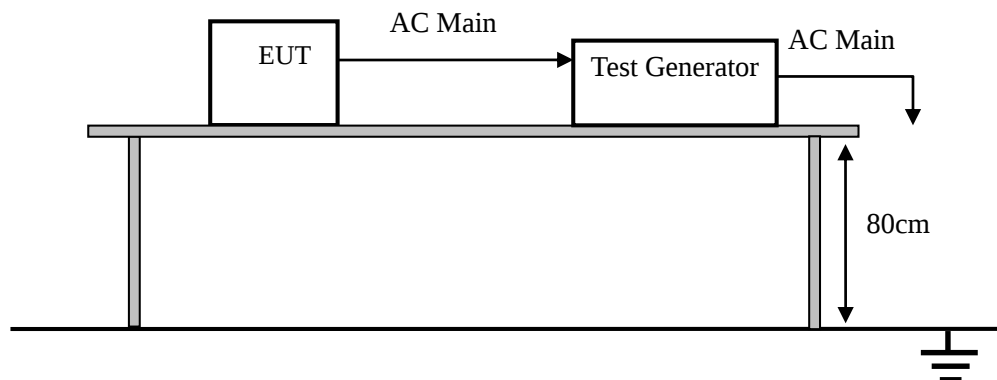


Table 4: Surge Immunity Test Result

Coupling Ports		Coupling Voltage	Coupling Phase / Result			
			0°	90°	180°	270°
AC power ports	L-N	+/-1kV Direct	/	Pass	/	Pass
	L-PE	+/-2kV Direct	/	Pass	/	Pass
	N-PE	+/-2kV Direct	/	Pass	/	Pass

Remark: The screen was flashing during the test, but self-recoverable after the test

5.6. Injected Currents Susceptibility Test

RESULT	: Pass
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-6:2014
Test specification	: 3 Vr.m.s, 3 Vr.m.s - 1Vr.m.s, 1Vr.m.s, AM 80%, 0.15 MHz - 10 MHz, 10 MHz – 30 MHz, 30 MHz – 80MHz
Performance criterion	: A

Test Setup

Date of test	: Dec. 01, 2022
Model No.	: M861
Input Voltage	: AC 230V/50Hz, AC 110V/60Hz
Operation Mode	: HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode, LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE, OPTION Mode
Temperature	: 24.3°C
Humidity	: 51.1%
Pressure	: 101.2kPa

The EUT were placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) was placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT were as short as possible, and their height above the ground reference plane were between 30 and 50 mm (where possible).

The frequency range was swept from 0.15 MHz - 10 MHz, 10 MHz – 30 MHz and 30 MHz – 80MHz using 3V, 3 V - 1V, 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency was swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

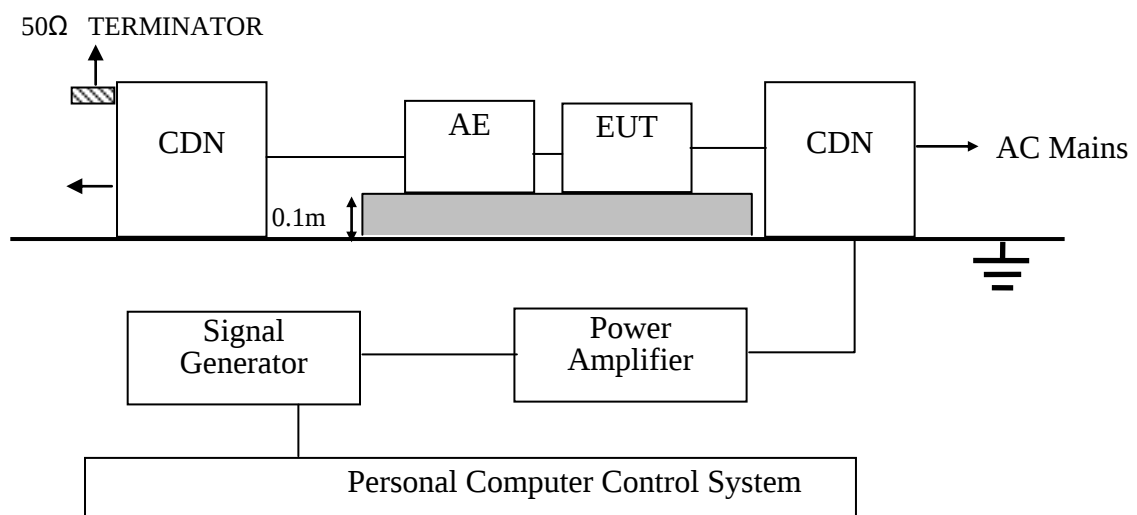


Table 5: Injected Currents Susceptibility Test Result

Voltage (V)	Test Frequency (MHz)	Test mode (Worst)	Injection Method	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	0.15 –10 MHz	HDMI Mode	CDN-M3	75dBSPL	Speaker	$\leq$ -20dB	-46 dB
3 -1	10 –30 MHz						-51 dB
1	30 –80 MHz						-53 dB
3	0.15 –10 MHz	HDMI Mode	EM Clamp	75dBSPL	Speaker	$\leq$ -20 dB	-45 dB
3 -1	10 –30 MHz						-50 dB
1	30 –80 MHz						-54 dB

5.7. Power Frequency Magnetic Field Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-8:2010
Test specification : 1 A/m
Performance criterion : A

Test Setup

Date of test : Dec. 01, 2022
Model No. : M861
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode
Temperature : 24.7°C
Humidity : 51.2%
Pressure : 101.2kPa

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m). The induction coil then was rotated by 90° in order to expose the EUT to the test field with different orientations.

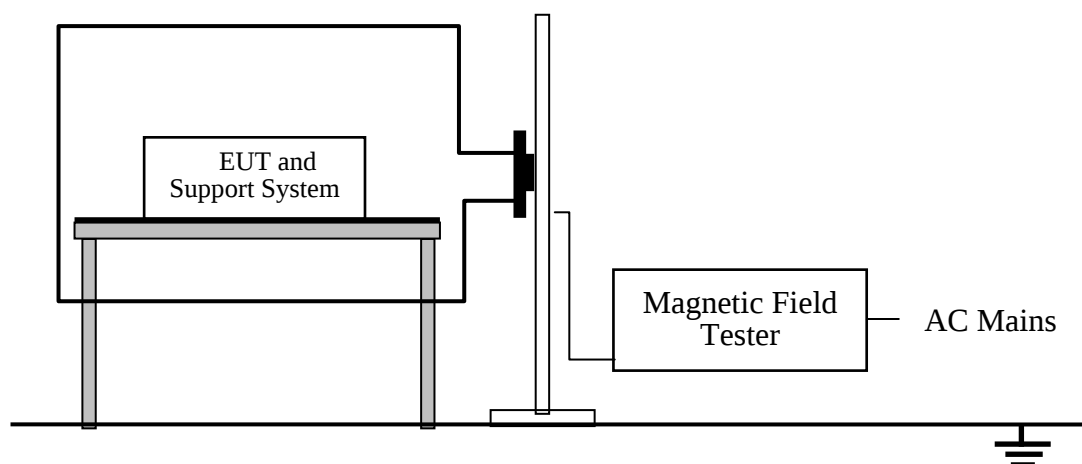


Table 6: Power Frequency Magnetic Field Immunity Test Result

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 mins	X	A	Pass
1A/m	5 mins	Y	A	Pass
1A/m	5 mins	Z	A	Pass

Remark: There was no change compared with initial operation during the test

5.8. Voltage Dips and Short Interruptions Immunity Test

RESULT : **Pass**

Test procedure : EN 55035:2017+A11:2020

Basic standard : EN 61000-4-11:2004

Test specification : 0%UT ; 0.5P, Criterion: B
70%UT; 25P/30P, Criterion: C
0%UT; 250P/300P, Criterion: C

Test Setup

Date of test : Dec. 01, 2022

Model No. : M861

Input Voltage : AC 230V/50Hz, AC 110V/60Hz

Operation Mode : HDMI 1 Mode, HDMI 2 Mode, DP1 Mode, DP2 Mode,
LAN 1 Mode, LAN 2 Mode, COMPUTE MODULE,
OPTION Mode

Temperature : 24.6°C

Humidity : 51.2%

Pressure : 101.2kPa

The interruptions was introduced at selected phase angles with specified duration.
Recorded any degradation of performance.

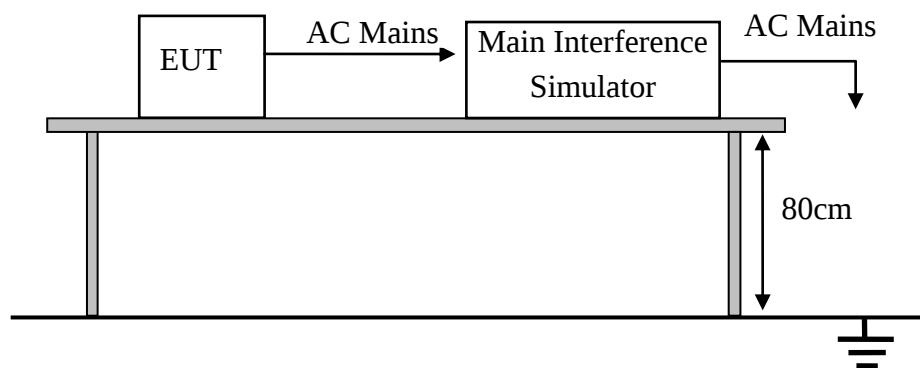


Table 7: Voltage Dips and Short Interruptions Immunity Test Result AC 230V/50Hz

Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in period)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Remark: The EUT was Stopped during the test, but self-recoverable after the test.

Table 8: Voltage Dips and Short Interruptions Immunity Test Result AC 110V/60Hz

Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in period)	Criterion	Result
0	100	0.5P	B	PASS
70	30	30P	C	PASS
0	100	300P	C	PASS

Remark: The EUT was Stopped during the test, but self-recoverable after the test.

6. PHOTOGRAPHS OF TEST SET-UP


6.1. Set-up for Conducted Emission at the Mains Terminals Test




6.2.Set-up for Asymmetric Mode Conducted Emissions Test



6.3.Set-up for Radiated Emission Test

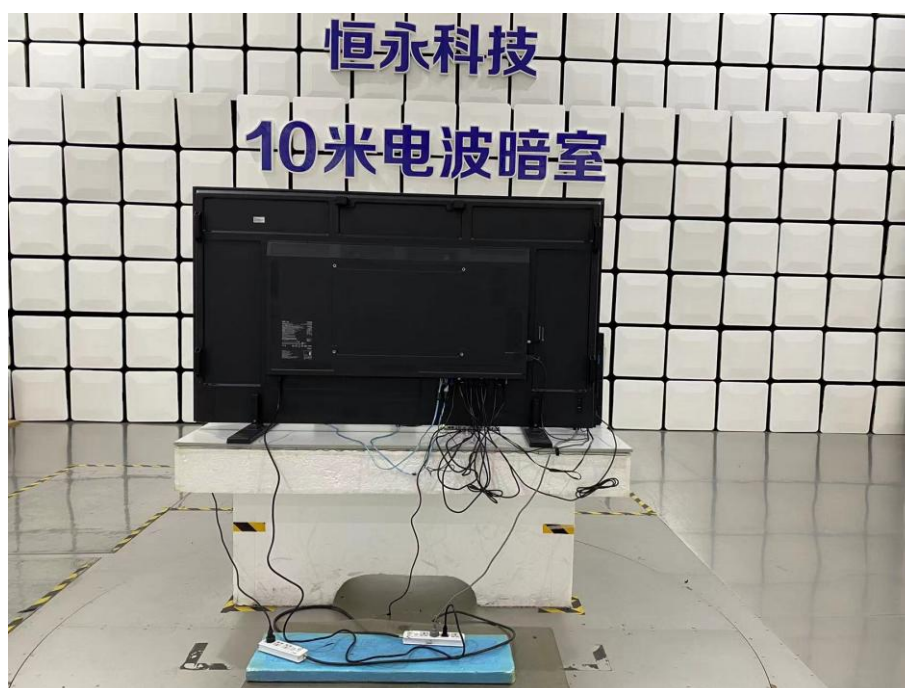


6.4.Set-up for Radiated Emission Test(above 1GHz)

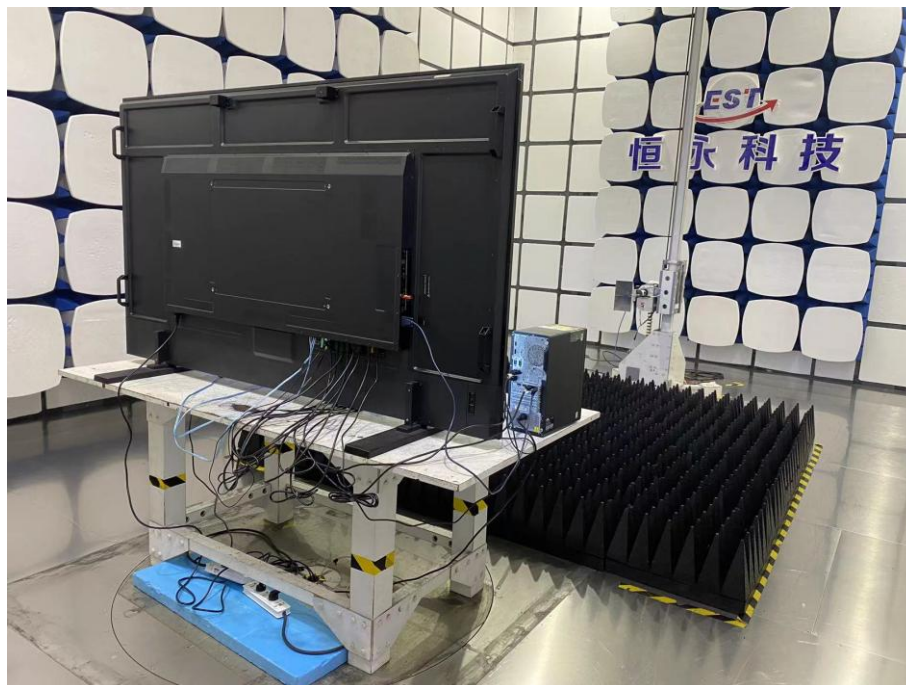


6.5.Set-up for Harmonic Current Emissions and Flicker on AC Mains Test



6.6.Set-up for Electrostatic Discharge Immunity Test

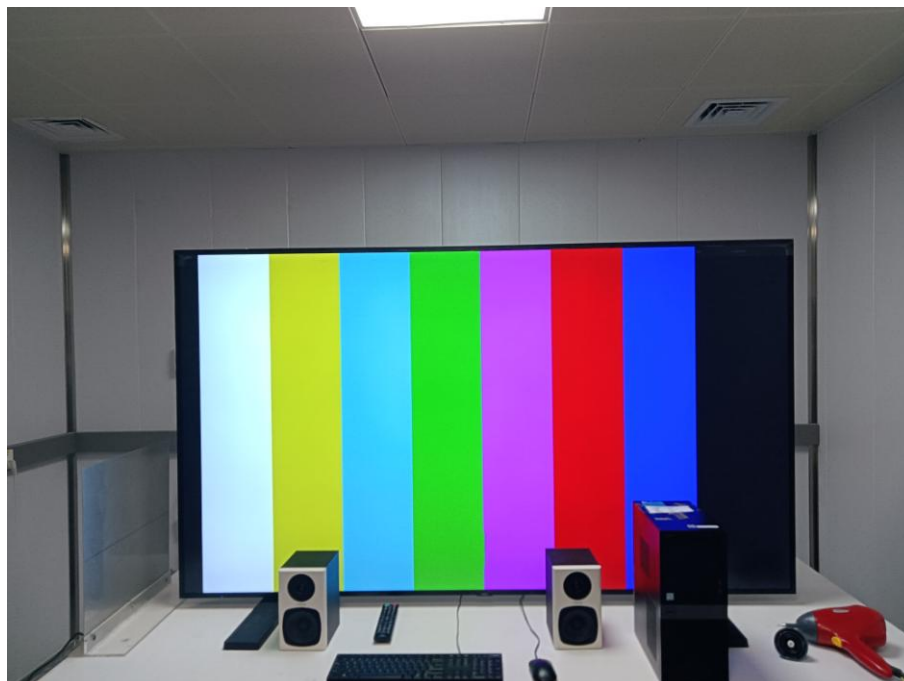

6.7.Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test

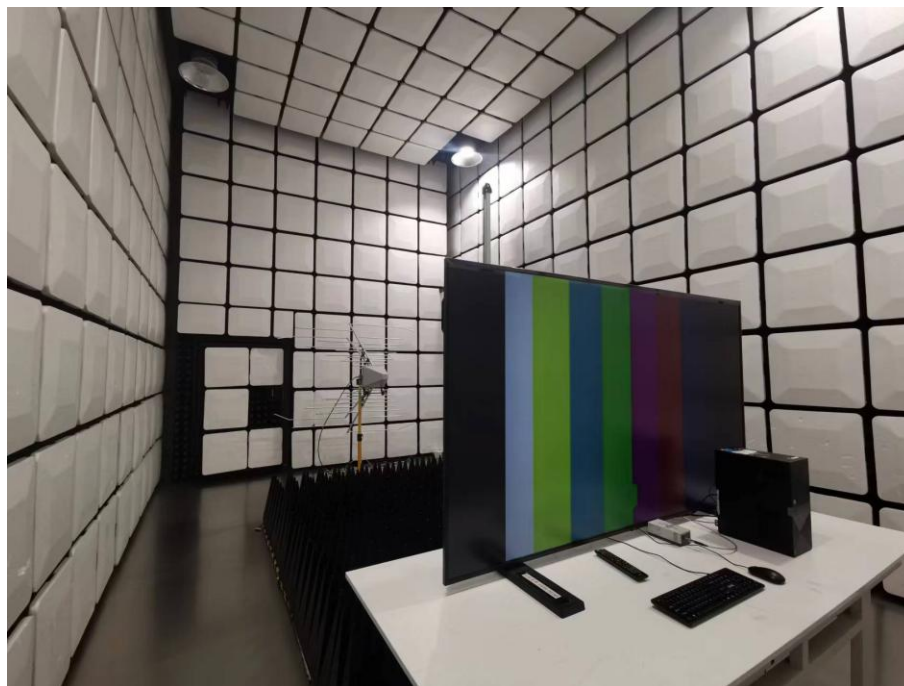

6.8.Set-up for Surge Immunity Test



6.9.Set-up for Electrical Fast Transient/Burst Immunity Test



(AC Port)



(Signal Port)

6.10. Set-up for Injected Currents Susceptibility Test



AC Port



Signal Port

6.11.Set-up for Voltage Dips and Short Interruptions Immunity Test



7. PHOTOGRAPHS OF THE EUT

Figure 1
General Appearance of the EUT



Figure 2
General Appearance of the EUT



Figure 3
General Appearance of the EUT

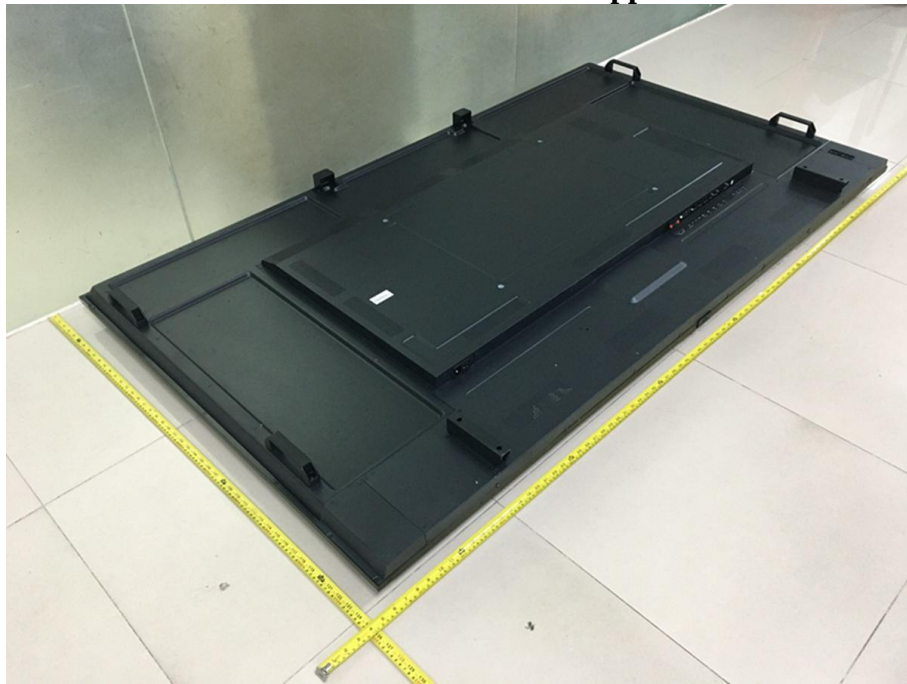


Figure 4
General Appearance of the EUT

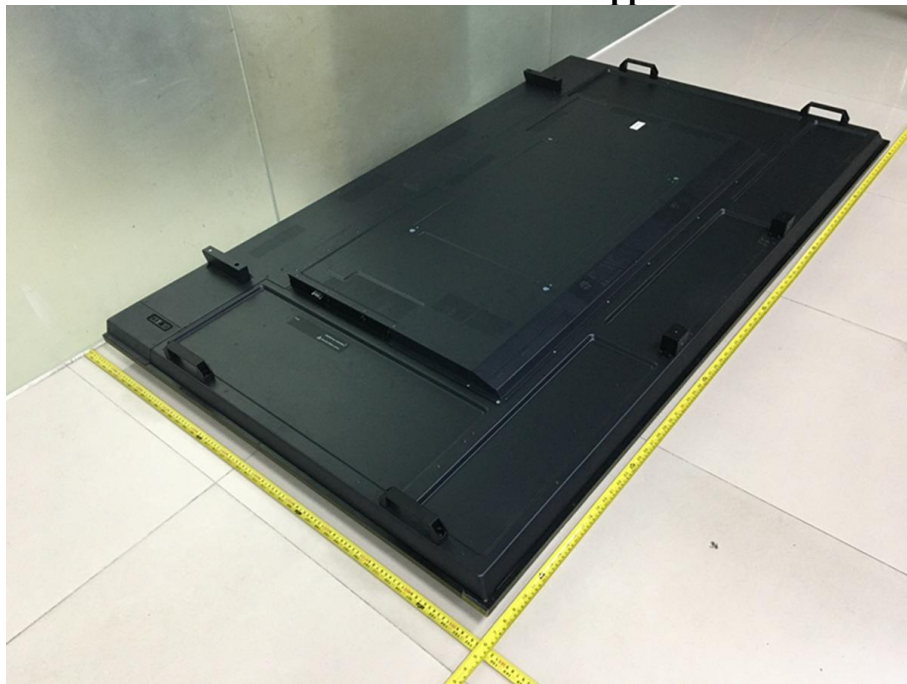


Figure 5
General Appearance of the EUT

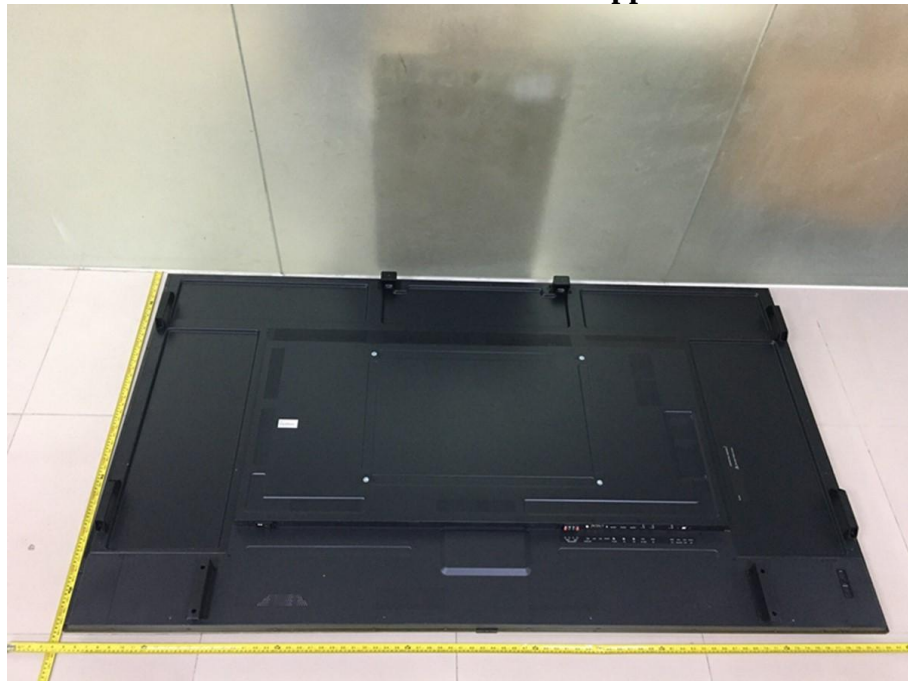


Figure 6
General Appearance of the EUT



Figure 7
General Appearance of the EUT



Figure 8
General Appearance of the EUT



Figure 9
General Appearance of the EUT



Figure 10
General Appearance of the EUT



Figure 11
General Appearance of the EUT



Figure 12
General Appearance of the EUT

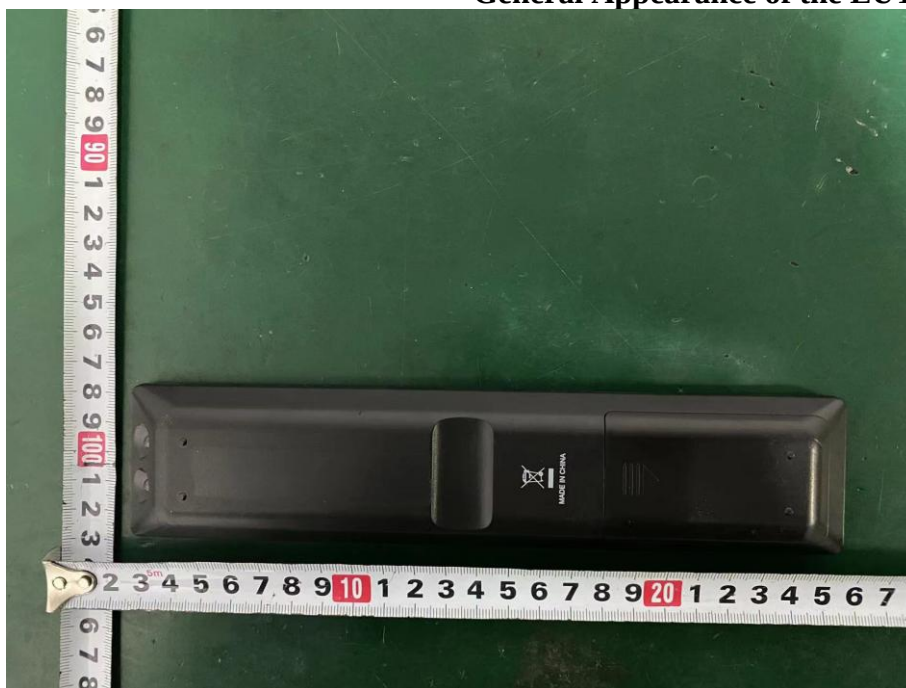


Figure 13
General Appearance of the EUT



Figure 14
General Appearance of the EUT



End of Test Report