

CE/EMC COMPLIANCE REPORT

for

Shenzhen KTC Commercial Display Technology Co., Ltd.

LCD MONITOR

Prepared for : Shenzhen KTC Commercial Display Technology Co., Ltd.
Address : The B district of the first floor, third floor and fourth floor, 1# Building,
: NO. 4023, Wuhe Street, Bantian, longgang District, Shenzhen City,
Guangdong Province, P .R. China.

Prepared By : EST Technology Co., Ltd.
Address : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

Tel: 86-769-83081888

Fax: 86-769-83081878


Report Number : ESTE-E2208035

Date of Report : Aug. 12, 2022

TABLE OF CONTENTS

Test Report Declaration	Page
1. GENERAL PRODUCT INFORMATION.....	4
1.1. Product Function	4
1.2. Description of Device (EUT)	4
1.3. Difference between Model Numbers	4
1.4. Independent Operation Modes	4
1.5. Test Supporting System	4
2. TEST SITES.....	5
2.1. Description of Standards and Results.....	5
2.2. Test Facilities	7
2.3. List of Test and Measurement Instruments	8
3. TEST SET-UP AND OPERATION MODES	10
3.1. Principle of Configuration Selection.....	10
3.2. Block Diagram of Test Set-up.....	10
3.3. Test Operation Mode and Test Software.....	11
3.4. Special Accessories and Auxiliary Equipment	11
3.5. Countermeasures to Achieve EMC Compliance.....	12
4. EMISSION TEST RESULTS.....	13
4.1. Conducted Emission at the Mains Terminals Test	13
4.2. Asymmetric mode conducted emissions test.....	42
4.3. Radiated Emission Test (30MHz-1000MHz).....	45
4.4. Radiated Emission Test (above 1GHz)	74
4.5. Harmonic Current Emissions on AC Mains Test.....	103
4.6. Voltage Fluctuations and Flicker on AC Mains Test	107
5. IMMUNITY TEST RESULT	109
5.1. Description of Performance Criteria:	109
5.2. Electrostatic Discharge Immunity Test	110
5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test.....	112
5.4. Electrical Fast Transient/Burst Immunity Test	115
5.5. Surge Immunity Test.....	117
5.6. Injected Currents Susceptibility Test	119
5.7. Power Frequency Magnetic Field Immunity Test.....	121
5.8. Voltage Dips and Short Interruptions Immunity Test.....	122
6. PHOTOGRAPHS OF TEST SET-UP	124
6.1. Set-up for Conducted Emission at the Mains Terminals Test	124
6.2. Set-up for Asymmetric Mode Conducted Emissions Test	125
6.3. Set-up for Radiated Emission Test(30MHz-1000MHz)	126
6.4. Set-up for Radiated Emission Test(above 1GHz)	127
6.5. Set-up for Harmonic Current Emissions and Flicker on AC Mains Test.....	128
6.6. Set-up for Electrostatic Discharge Immunity Test	128
6.7. Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test.....	129
6.8. Set-up for Surge Immunity Test.....	129
6.9. Set-up for Electrical Fast Transient/Burst Immunity Test	130
6.10. Set-up for Injected Currents Susceptibility Test	131
6.11. Set-up for Voltage Dips and Short Interruptions Immunity Test.....	132
7. PHOTOGRAPHS OF THE EUT.....	133

EST Technology Co., Ltd.

Applicant:	Shenzhen KTC Commercial Display Technology Co., Ltd.		
Address:	The B district of the first floor, third floor and fourth floor, 1# Building, NO. 4023, Wuhe Street, Bantian, longgang District, Shenzhen City, Guangdong Province, P.R. China		
Manufacturer:	Sharp NEC Display Solutions, Ltd.		
Address:	4-28, Mita 1-chome, Minato-ku, Tokyo, 108-0073 Japan		
Factory 1:	Huizhou KTC Technology Co., Ltd.		
Address:	NO.38 Guangtai Road, Huinan HI-TECH Industrial Park, Huizhou City, Guangdong Province, P.R. China		
Factory 2:	Shenzhen KTC Commercial Display Technology Co., Ltd.		
Address:	The B district of the first floor, third floor and fourth floor, 1# Building, NO. 4023, Wuhe Street, Bantian, longgang District, Shenzhen City, Guangdong Province, P.R. China		
E.U.T:	LCD MONITOR		
Model Number:	E758		
Trade Name:	NEC	Serial No:	-----
Date of Receipt:	Jul. 09, 2022	Date of Test:	Aug. 05~09, 2022
Test Specification:	EN 55032:2015+A11:2020 / BS EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 / BS EN 55035:2017+A11:2020 EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021 / BS EN61000-3-2:2014; BS EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021 / BS EN 61000-3-3:2013; BS EN 61000-3-3:2013+A1:2019+A2:2021 AS/NZS CISPR 32:2015+A1:2020		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		Issue Date: Aug. 12, 2022	
Prepared by:	Reviewed by:	Approved by:	
 _____ Homra / Assistant	 _____ Bible/ Engineer	 _____ Iceman Hu / Manager	
Other Aspects:			
None.			
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.</i>			

1. GENERAL PRODUCT INFORMATION

1.1. Product Function

Refer to Technical Construction Form and User Manual.

1.2. Description of Device (EUT)

Description	: LCD MONITOR
Model No.	: E758
System Input Voltage	: AC 100-240V, 50/60Hz, 2.8-1.2A (3.2A FOR MEXICO)
Output	: USB 2.0: DC 5V/0.5A Type-C: DC 5V/3A
AC Line	: Unshielded, Detachable 3.0m
Type-C Line	: Unshielded, Detachable 1.5m
LAN	: Unshielded, Detachable 1.5m
Headphone	: Unshielded, Detachable 1.5m
SPDIF OUT	: Unshielded, Detachable 1.5m
AV IN	: Unshielded, Detachable 1.5m
AUDIO IN	: Unshielded, Detachable 1.5m
HDMI	: Shielded, Detachable 3.0m
VGA	: Shielded, Detachable 1.5m
RS-232C	: Shielded, Detachable 1.5m

1.3. Difference between Model Numbers

None.

1.4. Independent Operation Modes

The basic operation modes are:

1.4.1. HDMI 1 Mode (3840*2160)

1.4.2. HDMI 2 Mode (3840*2160)

1.4.3. HDMI 3 Mode (3840*2160)

1.4.4. AV IN

1.4.5. USB Play

1.4.6. LAN Mode

1.4.7. VGA Mode (1920*1080)

1.5. Test Supporting System

2. TEST SITES

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION(EN 55032:2015+A11:2020)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 5.53dB at 0.17MHz	
Asymmetric mode conducted emissions	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 7.98dB at 18.23MHz	
Conducted differential voltage emissions	EN 55032:2015+A11:2020	Class B	N/A
		More than *** dB below the limit line.	
Radiated Emission Test (30MHz~1000MHz)	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 3.05dB at 34.63MHz	
Radiated Emission Test (above 1GHz)	EN 55032:2015+A11:2020	Class B	PASS
		Minimum passing margin is 8.32dB at 2430.00MHz	
Harmonic current emissions	EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021	Class D	PASS
Voltage fluctuations & flicker	EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021	Section 4.6	PASS
N/A is an abbreviation for Not Applicable.			

IMMUNITY (EN 55035:2017+A11:2020)				
Description of Test Item	Basic Standard	Performance Criteria	Observation Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	B	PASS
Radio-frequency,Continuous radiated disturbance	EN 61000-4-3:2006+A1:2008+A2:2010	A	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	B	PASS
Surge (Input a.c. power port)	EN 61000-4-5:2014	B	B	PASS
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6:2014	A	A	PASS
Power frequency magnetic field	EN 61000-4-8:2010	A	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11:2004	B	B	PASS
Voltage dips, 30% reduction		C	C	PASS
Voltage interruptions		C	C	PASS
N/A is an abbreviation for Not Applicable.				

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. List of Test and Measurement Instruments

2.3.1. For conducted emission at the mains terminals test (2# conduction)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	June 13,22	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E048	June 13,22	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.2. For Asymmetric mode conducted emissions test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	June 13,22	1 Year
ISN	Teseq	T8	EST-E041	June 13,22	1 Year
Current Transformer	SCHWARZBECK	SW9605	EST-E045	June 13,22	1 Year
Voltage Probe	SCHWARZBECK	TK9420	EST-E046	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.3. For radiated emission test (30MHz-1000MHz; 10m radiation)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E105	June 13,22	1 Year
EMI Test Receiver	Rohde & Schwarz	ESR3	EST-E126	June 13,22	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E052	June 13,22	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E127	June 13,22	1 Year
Signal Amplifier	Agilent	310N	EST-E010	June 13,22	1 Year
Signal Amplifier	Agilent	310N	EST-E068	June 13,22	1 Year
Test Software	EZ	EZ-EMC	EST10m-03A2	N/A	N/A

2.3.4. For radiated emission test (above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	June 13,22	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	EST-E031	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.5. For harmonic current emissions and voltage fluctuations/flicker test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Analyzer	California Instruments	3001IX-208-CTS	EST-E011	June 13,22	1 Year
Voltage Source	California Instruments	3001IX-208	EST-E012	June 13,22	1 Year
Test Software	California Instruments	CTS	N/A	N/A	N/A

2.3.6. For electrostatic discharge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
ESD Generator	Teseq	NSG437	EST-E073	June 13,22	1 Year

2.3.7. For electrical fast transient/burst immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EFT Generator	EMC PARTNER	TRANSIENT 2000	EST-E074	June 13,22	1 Year
Capacitive Coupling Clamp	HAEFELY	IP4A	EST-E040	June 13,22	1 Year

2.3.8. Radio Frequency Electromagnetic Field Immunity (R/S) Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Agilent	N5181A	EST-E060	June 13,22	1 Year
Power Amplifier	SKET	HAP801000M-250W	EST-E061	N/A	N/A
Power Amplifier	SKET	HAP0103G-75W	EST-E062	N/A	N/A
Power Amplifier	SKET	HAP0306G-50W	EST-E063	N/A	N/A
Power Meter	Agilent	E4419B	EST-E064	June 13,22	1 Year
Power sensor	Agilent	E9301A	EST-E065	June 13,22	1 Year
Power sensor	HP	E9301A	EST-E066	June 13,22	1 Year
Antenna	Schwarzbeck	STLP 9129	EST-E059	N/A	N/A
E-Field Probe	Narda	EP-601	EST-E067	June 13,22	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 13,22	1 Year
Test Software	SKET	EMC-S	V1.2.0.48	N/A	N/A

2.3.9. For surge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Surge Controller	HAEFELY	PSURGE8000	EST-E015	June 13,22	1 Year
Surge Impulse Module	HAEFELY	PIM100	EST-E016	June 13,22	1 Year
Surge Coupling Network	HAEFELY	PCD100	EST-E017	June 13,22	1 Year

2.3.10. For injected currents susceptibility test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Rohde &Schwarz	SMB100A	EST-E025	June 13,22	1 Year
Power Amplifier	FRANKONIA	CIT-10	EST-E021	N/A	N/A
Power Meter	Rohde &Schwarz	NRVS	EST-E027	June 13,22	1 Year
Audio Analyzer	Rohde &Schwarz	UPV	EST-E024	June 13,22	1 Year
CDN	FRANKONIA	CDN-M2+M3	EST-E022	June 13,22	1 Year
EM-Clamp	FRANKONIA	EMCL-20	EST-E042	June 13,22	1 Year
Test Software	SKET	EMC-S	V1.2.0.80	N/A	N/A

2.3.11. For power frequency magnetic field immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic Field Tester	HAEFELY	MFS 100	EST-E018	June 13,22	1 Year

2.3.12. For voltage dips and short interruptions immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
DIPS Tester	EMC PARTNER	TRANSIENT 2000	EST-E074	June 13,22	1 Year

Note: All calibration reports of the equipment were provided by LiSai calibration and Testing

3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection


Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

Immunity: The equipment under test (EUT) was configured to the representative operating mode and conditions.


3.2. Block Diagram of Test Set-up

System Diagram of Connections Between EUT and Simulators

3.2.1. For emission test

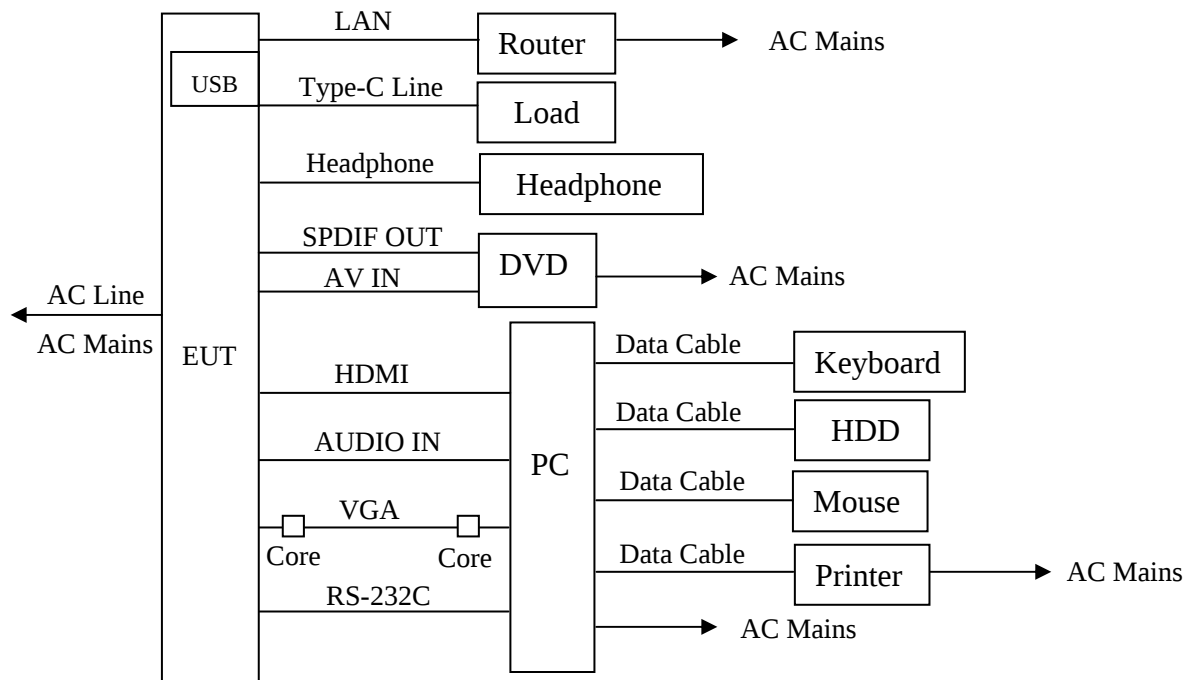

3.2.2. For immunity test

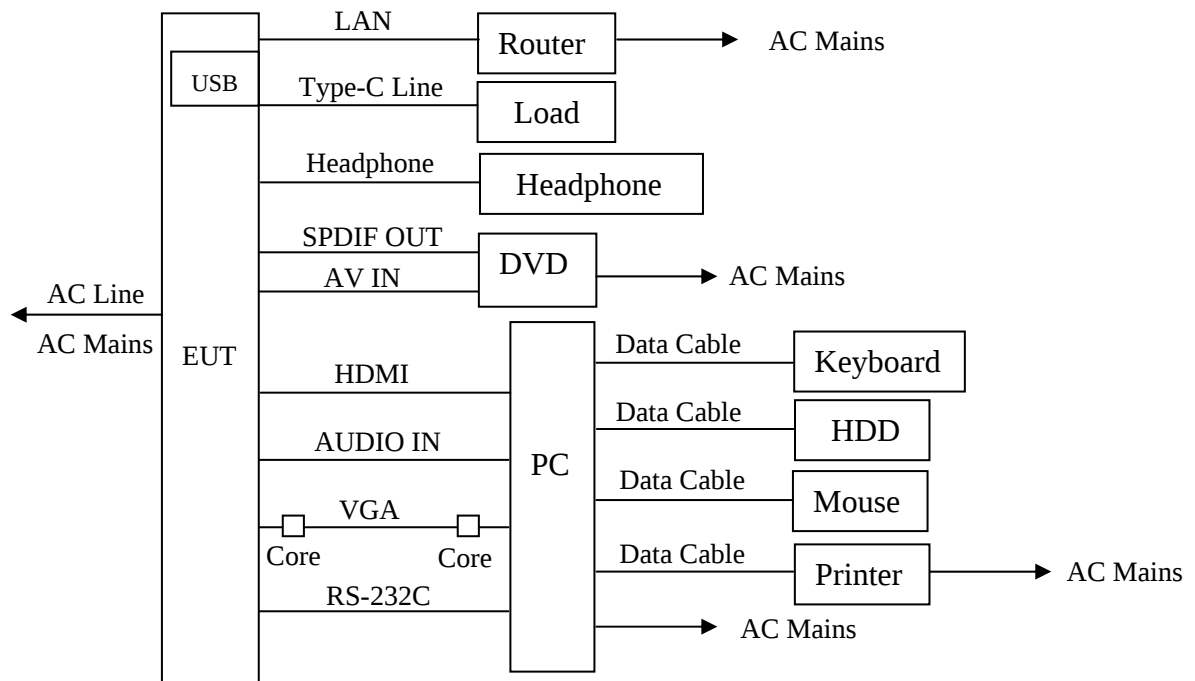

(EUT: LCD MONITOR)

3.3. Test Operation Mode and Test Software

Refer to Test Setup in clause 4 & 5.

3.4. Special Accessories and Auxiliary Equipment

3.4.1.DVD Player (4K)

M / N : BDP-G4350
S / N : BD43504KXX17011600701
Manufacturer : GIEC

3.4.2.DELL PC (4K)

M / N : Precision Tower 3620
S / N : 23TH6H2
Manufacturer : DELL

3.4.3.Keyboard

M / N : L100
S / N : CN-0RH656-65890-01M-070T
Manufacturer : Dell
Data Cable : Shielded, Undetachable, 1.8m

3.4.4.Mouse

M / N : MOL5VO
S / N : JOQ03RNT
Manufacturer : Dell
Data Cable : Shielded, Undetachable, 1.5m

3.4.5.Router

M / N : RT-AC66U
S / N : G1ICGG000260
Manufacturer : ASUS
Ethernet Line : Shielded, Detachable 1.5m

3.4.6.Printer

M / N : HP LaserJet 1020 Plus
Manufacturer : HP
AC Line : Unshielded, Detachable 1.2m
USB Line : Unshielded, Detachable 1.2m

3.4.7.iPod

M / N : A1238
S / N : 8K044D2Z9ZU
Manufacturer : Apple

3.4.8.U Disc

M / N : SDCZ7-4096
S / N : BH0701AGOB
Manufacturer : SanDisk

3.4.9.Earphone

M / N : KDM-430
Manufacturer : KEENION
Data Cable : Unshielded, Undetachable, 1.6m

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test


RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 0.15 ~ 30MHz
Test Site : 2# Conduction Shielded Room
Limits : EN 55032:2015+A11:2020 Class B

Test Setup

Date of test : Aug. 05, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode

The bandwidth of the test receiver was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was investigated.

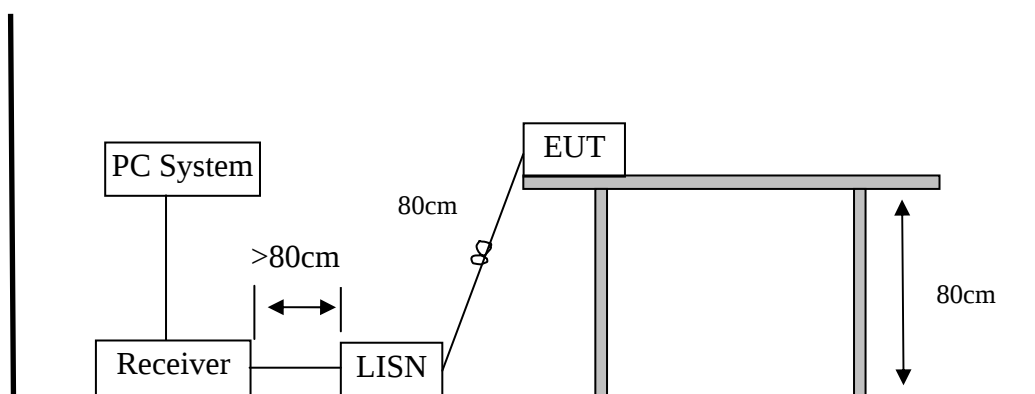


Note: Test uncertainty: $\pm 3.40\text{dB}$ at a level of confidence of 95%.(2#CE)

Test Data

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

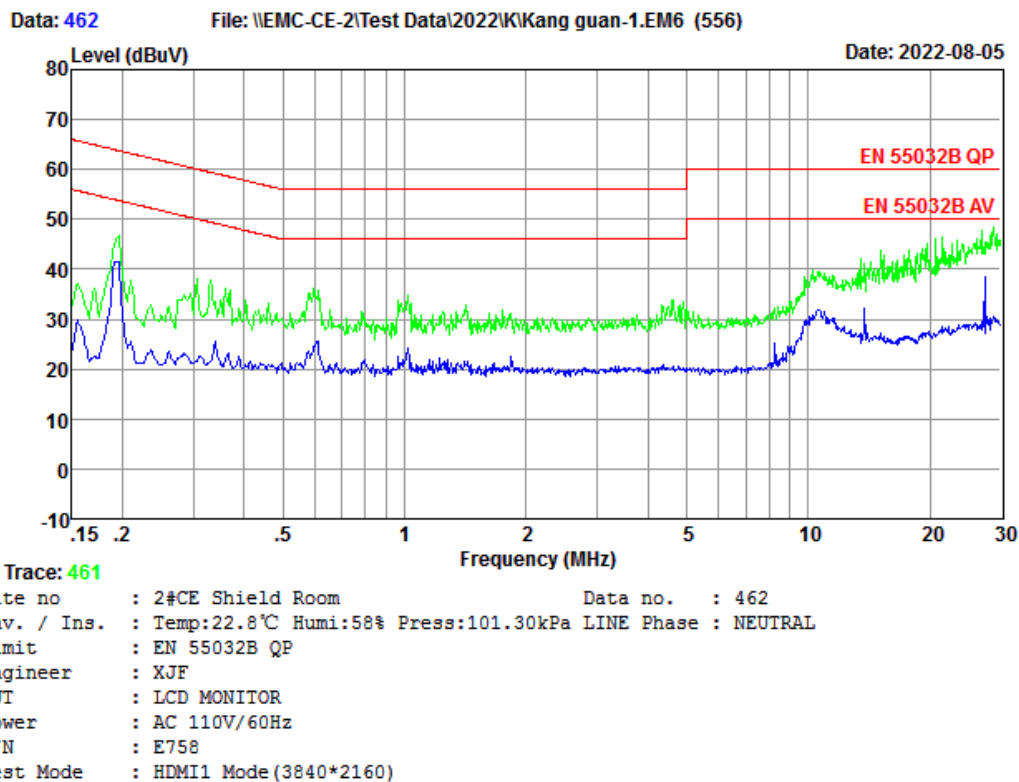

Data: 464

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

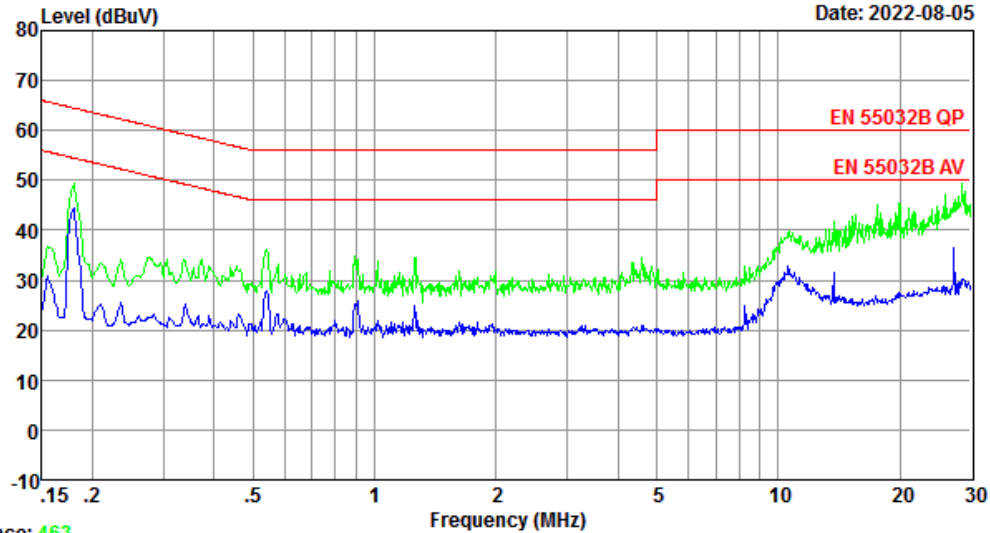


Trace: 463

Site no : 2#CE Shield Room Data no. : 464
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI1 Mode(3840*2160)

Data: 466

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

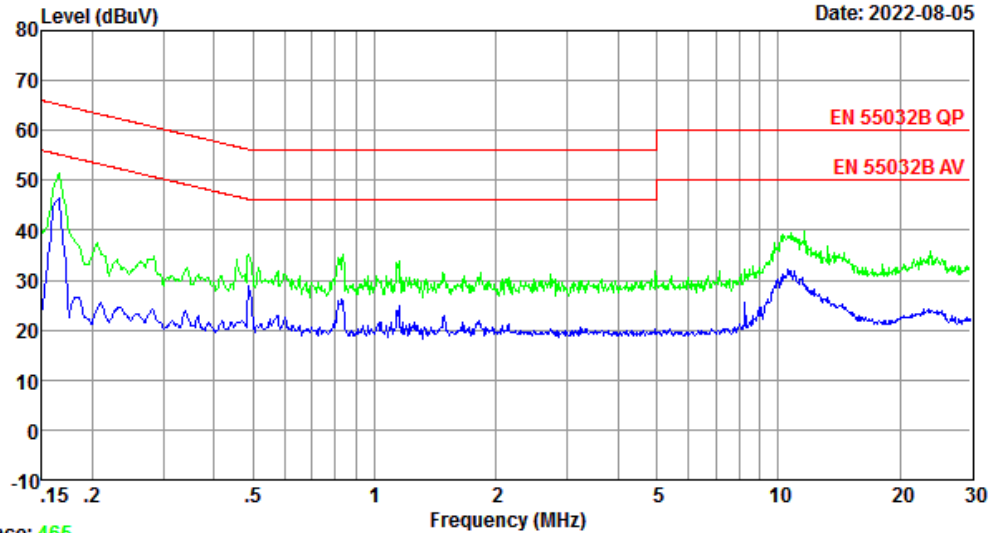


Trace: 465

Site no : 2#CE Shield Room Data no. : 466
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI1 Mode (3840*2160)

Data: 468

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

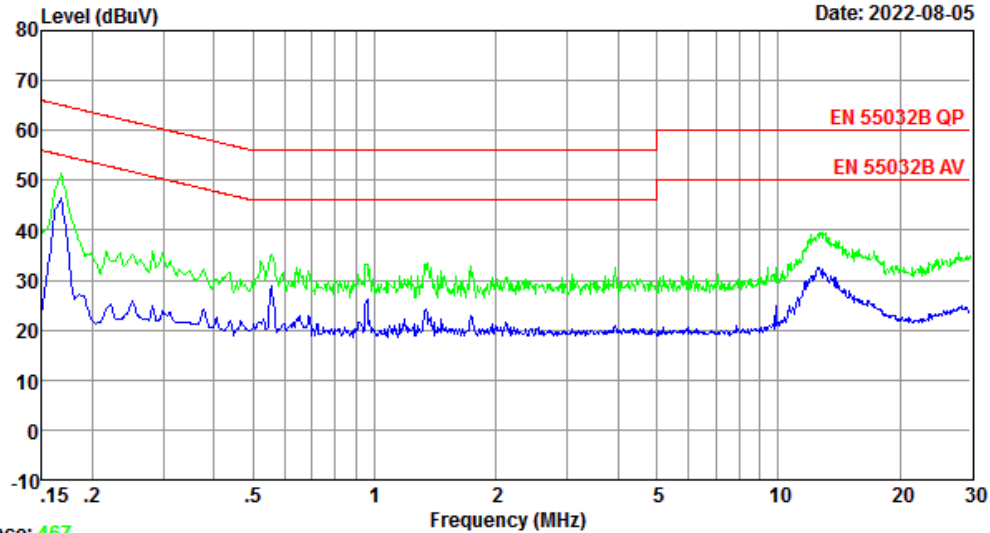


Trace: 467

Site no : 2#CE Shield Room Data no. : 468
Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI1 Mode(3840*2160)

Data: 470

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

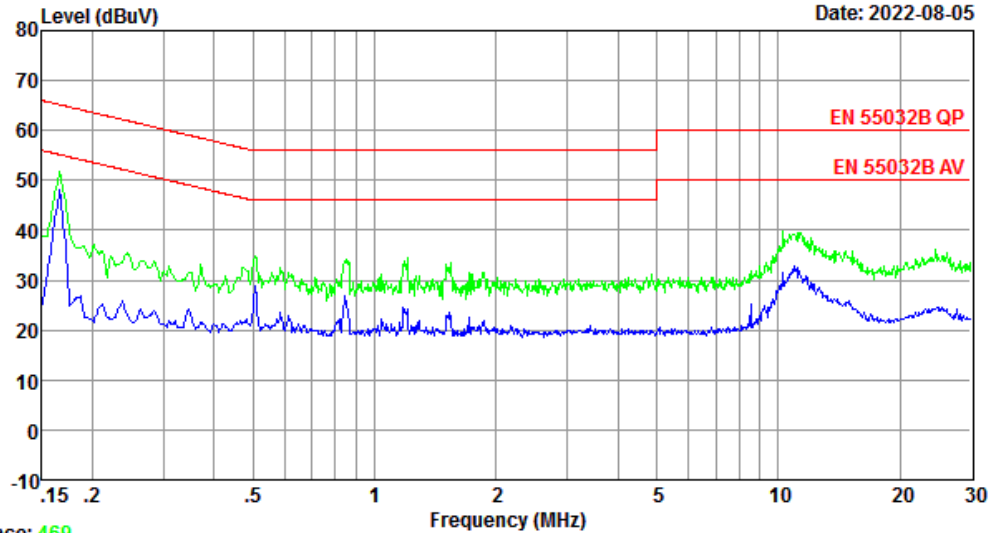


Trace: 469

Site no : 2#CE Shield Room Data no. : 470
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 472

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

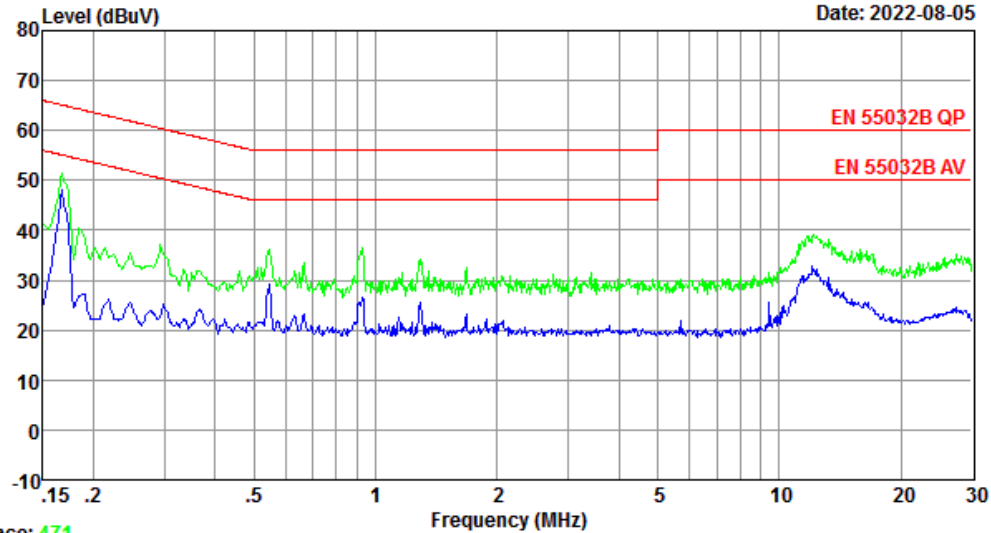


Trace: 471

Site no : 2#CE Shield Room Data no. : 472
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 474

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

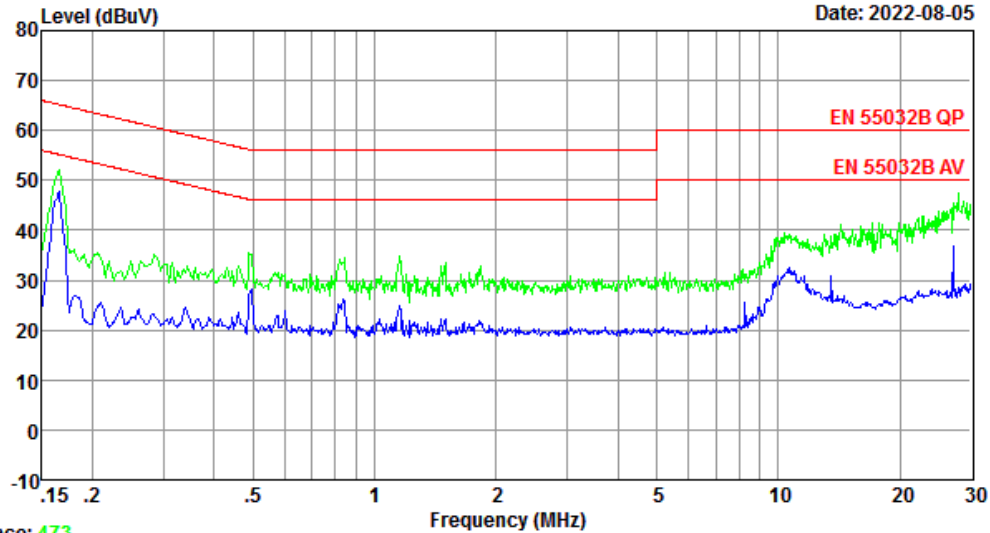


Trace: 473

Site no : 2#CE Shield Room Data no. : 474
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 476

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

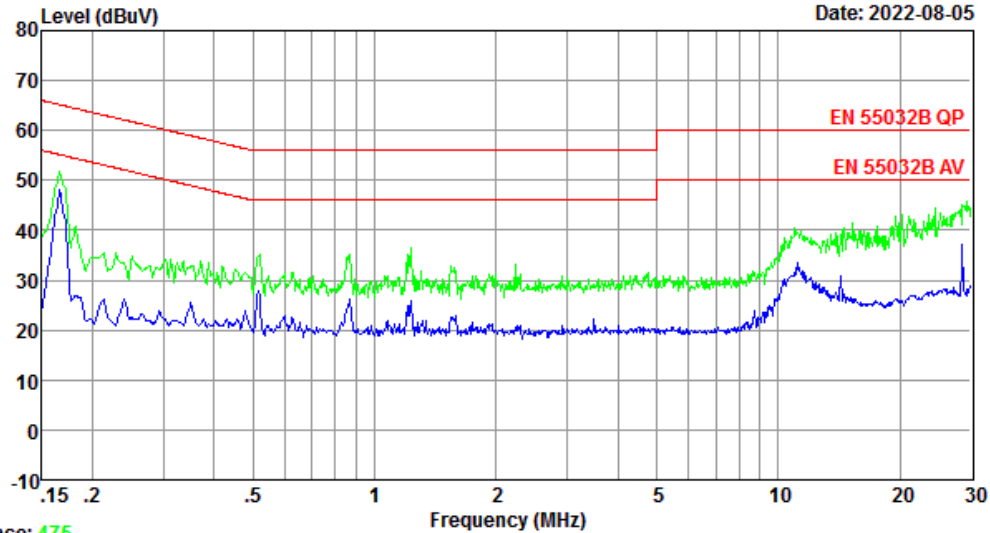


Trace: 475

Site no : 2#CE Shield Room Data no. : 476
Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 478

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

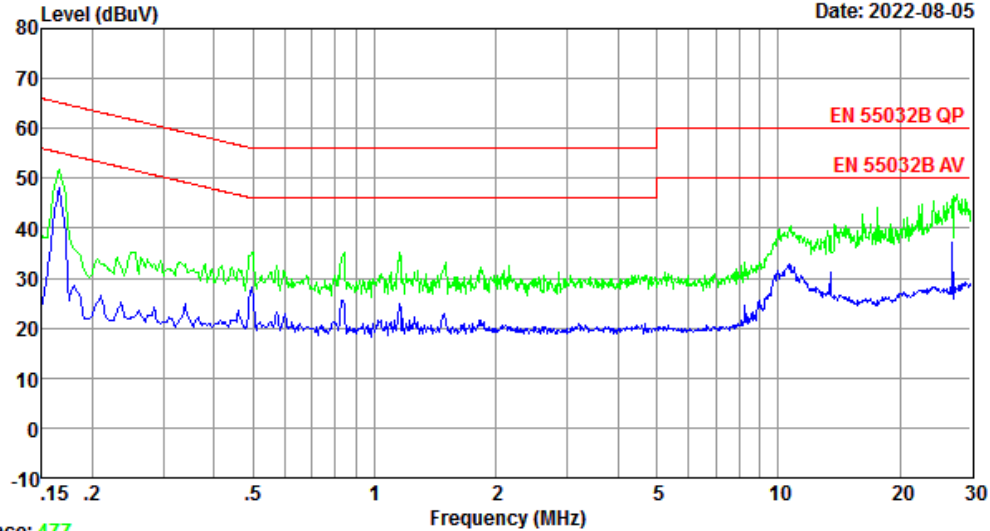


Trace: 477

Site no : 2#CE Shield Room Data no. : 478
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 480

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

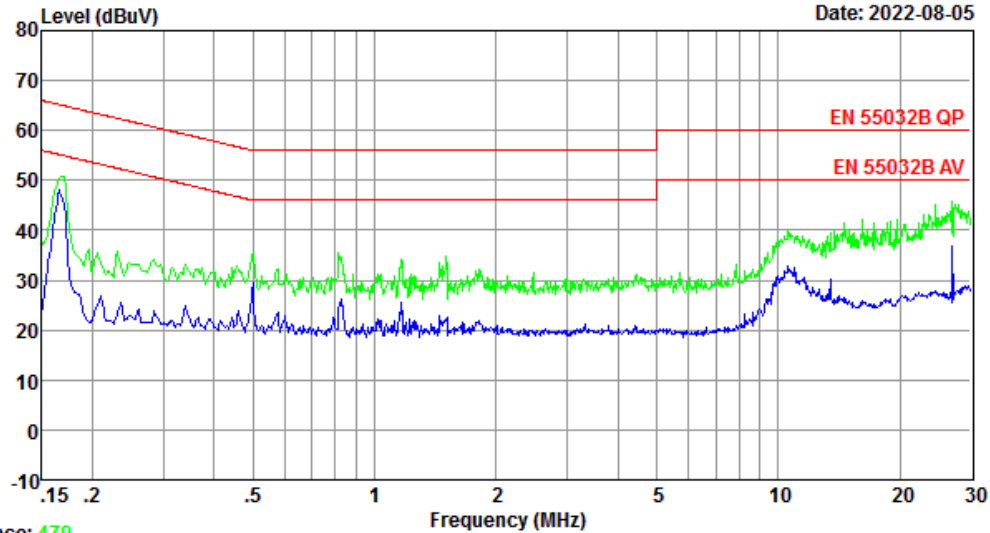


Trace: 479

Site no : 2#CE Shield Room Data no. : 480
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 482

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

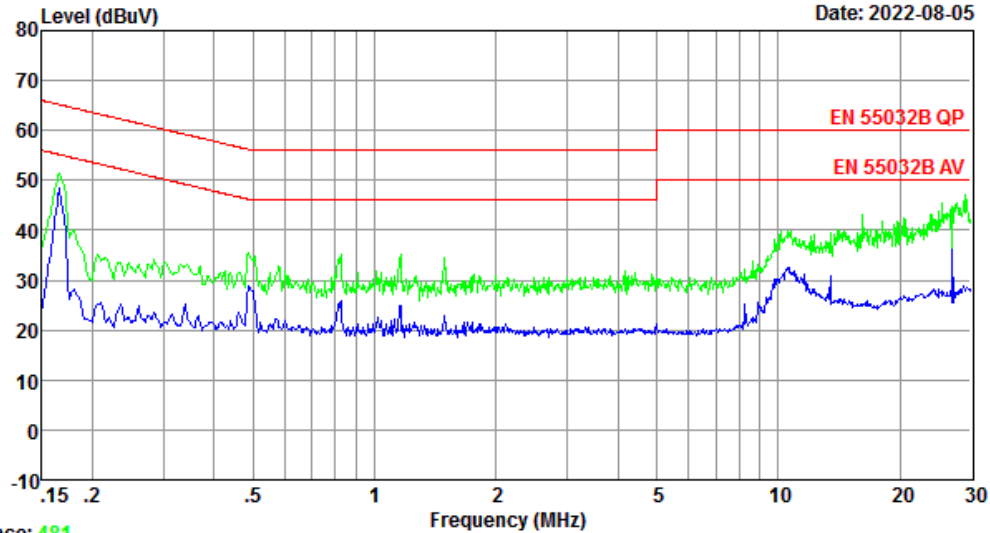


Trace: 481

Site no : 2#CE Shield Room Data no. : 482
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 484

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

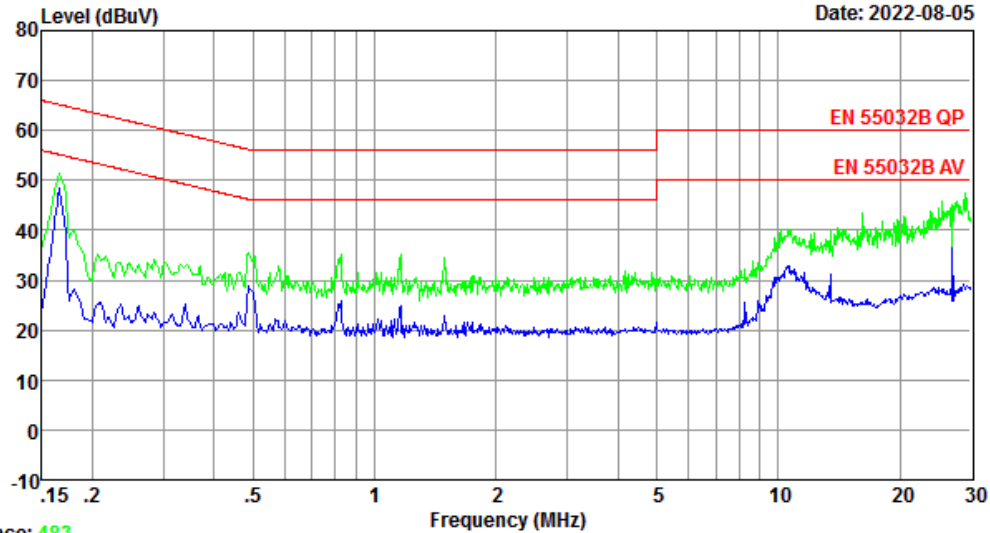


Trace: 483

Site no : 2#CE Shield Room Data no. : 484
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 486

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

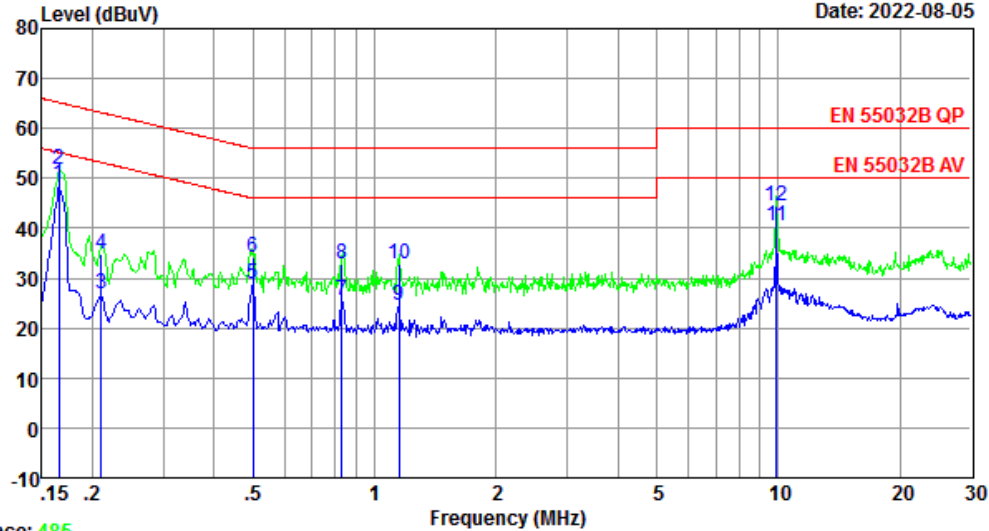

Trace: 485

Site no : 2#CE Shield Room Data no. : 486
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
 Limit : EN 55032B QP
 Engineer : XJF
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : E758
 Test Mode : VGA Mode (1920*1080)


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.78	9.69	29.38	48.85	55.21	6.36	Average
2	0.17	9.78	9.69	32.14	51.61	65.21	13.60	QP
3	0.21	9.78	9.84	7.15	26.77	53.18	26.41	Average
4	0.21	9.78	9.84	15.35	34.97	63.18	28.21	QP
5	0.50	9.76	9.92	9.06	28.74	46.01	17.27	Average
6	0.50	9.76	9.92	14.51	34.19	56.01	21.82	QP
7	0.83	9.85	9.93	5.59	25.37	46.00	20.63	Average
8	0.83	9.85	9.93	13.04	32.82	56.00	23.18	QP
9	1.15	9.82	9.94	4.83	24.59	46.00	21.41	Average
10	1.15	9.82	9.94	13.25	33.01	56.00	22.99	QP
11	9.91	10.09	10.07	20.29	40.45	50.00	9.55	Average
12	9.91	10.09	10.07	24.31	44.47	60.00	15.53	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 488

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

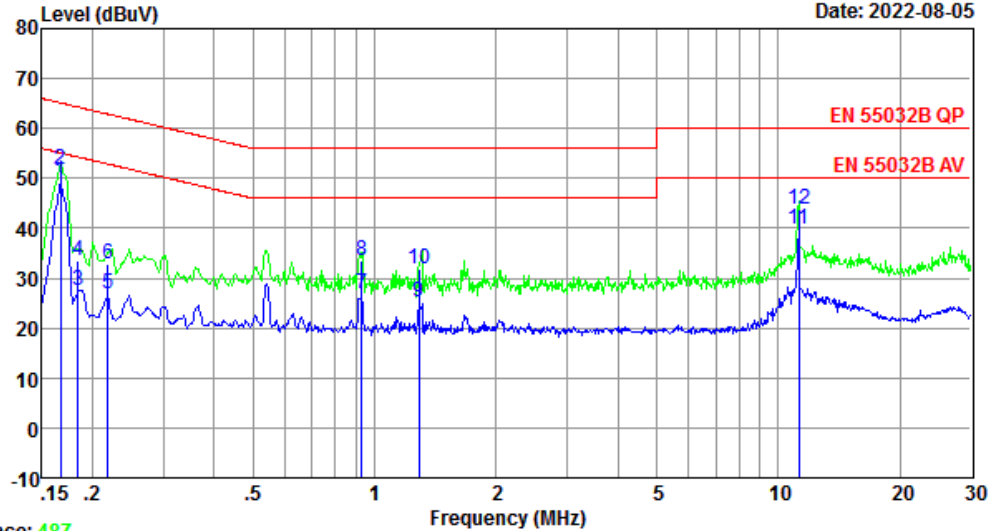

Trace: 487

Site no : 2#CE Shield Room Data no. : 488
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
 Limit : EN 55032B QP
 Engineer : XJF
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : E758
 Test Mode : VGA Mode (1920*1080)


	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.17	9.82	9.69	30.08	49.59	55.12	5.53	Average
2	0.17	9.82	9.69	32.12	51.63	65.12	13.49	QP
3	0.18	9.84	9.77	7.82	27.43	54.28	26.85	Average
4	0.18	9.84	9.77	13.84	33.45	64.28	30.83	QP
5	0.22	9.78	9.84	7.15	26.77	52.88	26.11	Average
6	0.22	9.78	9.84	13.25	32.87	62.88	30.01	QP
7	0.93	9.88	9.94	6.89	26.71	46.00	19.29	Average
8	0.93	9.88	9.94	13.70	33.52	56.00	22.48	QP
9	1.29	9.90	9.94	5.39	25.23	46.00	20.77	Average
10	1.29	9.90	9.94	12.03	31.87	56.00	24.13	QP
11	11.26	9.85	10.08	19.93	39.86	50.00	10.14	Average
12	11.26	9.85	10.08	23.75	43.68	60.00	16.32	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 490

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

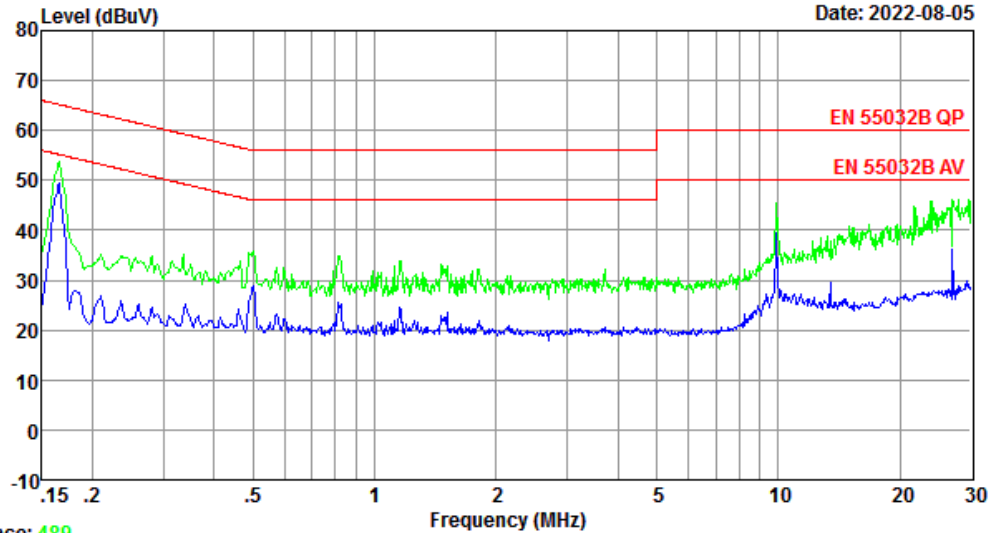


Trace: 489

Site no : 2#CE Shield Room Data no. : 490
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : VGA Mode (1920*1080)

Data: 492

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

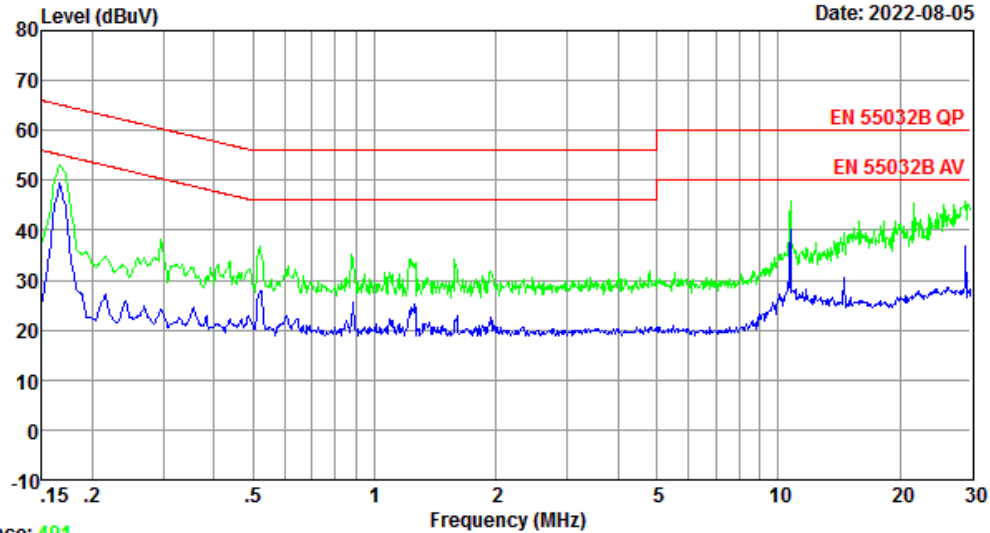


Trace: 491

Site no : 2#CE Shield Room Data no. : 492
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : VGA Mode (1920*1080)

Data: 494

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

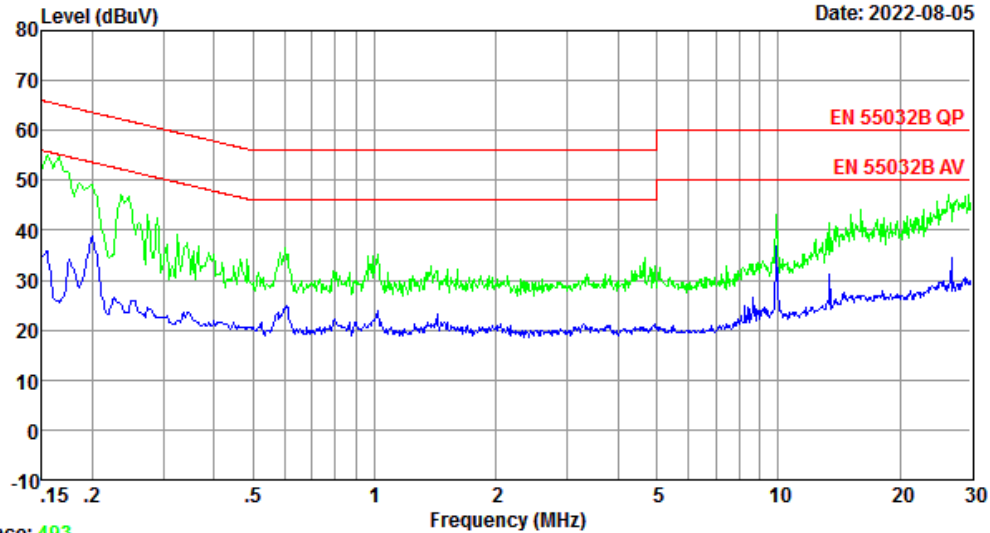


Trace: 493

Site no : 2#CE Shield Room Data no. : 494
Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : AV IN

Data: 496

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

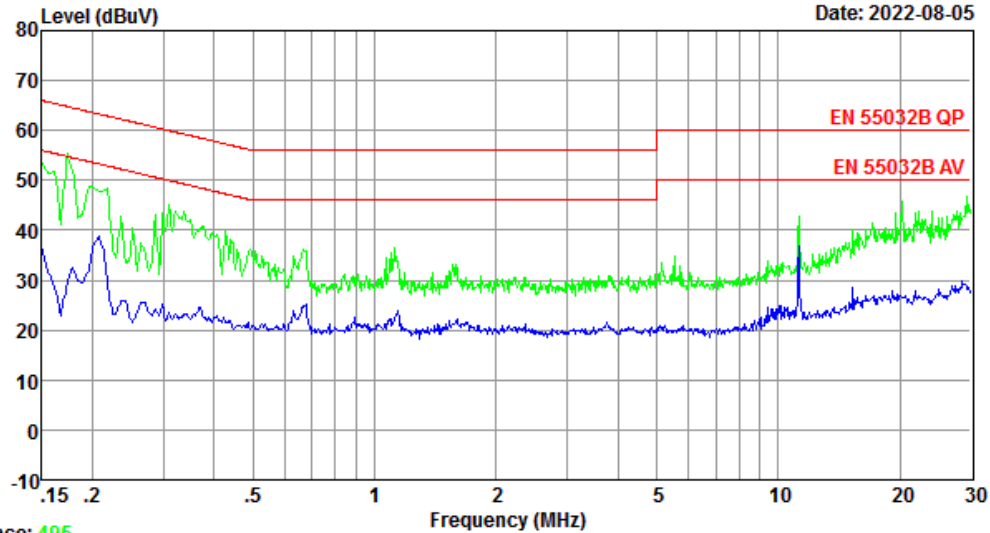


Trace: 495

Site no : 2#CE Shield Room Data no. : 496
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : AV IN

Data: 498

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

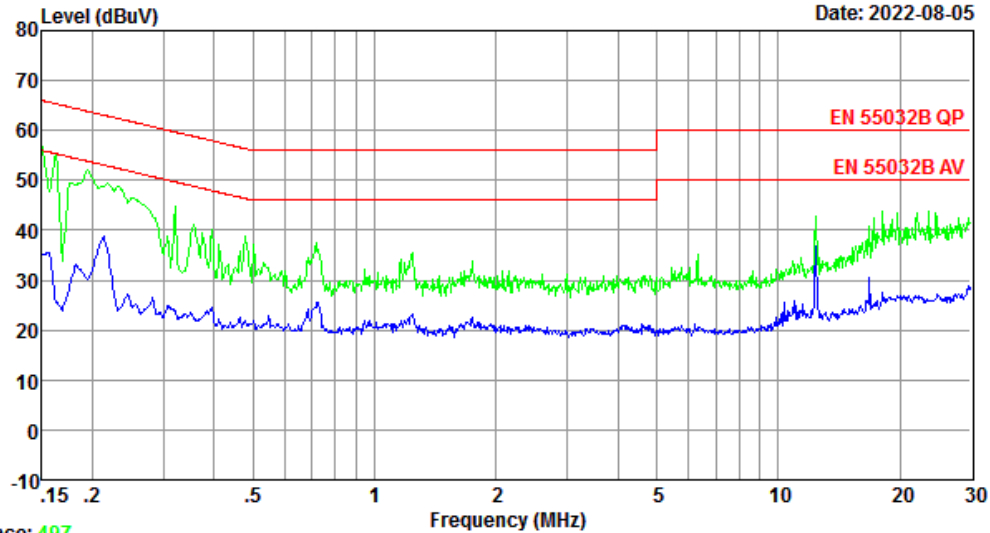


Trace: 497

Site no : 2#CE Shield Room Data no. : 498
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : AV IN

Data: 500

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

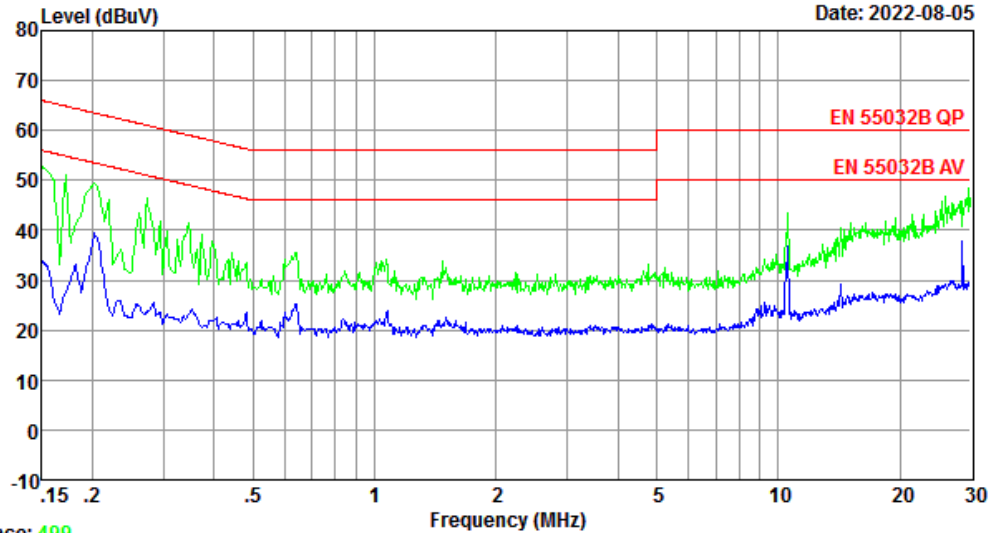


Trace: 499

Site no : 2#CE Shield Room Data no. : 500
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : AV IN

Data: 502

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

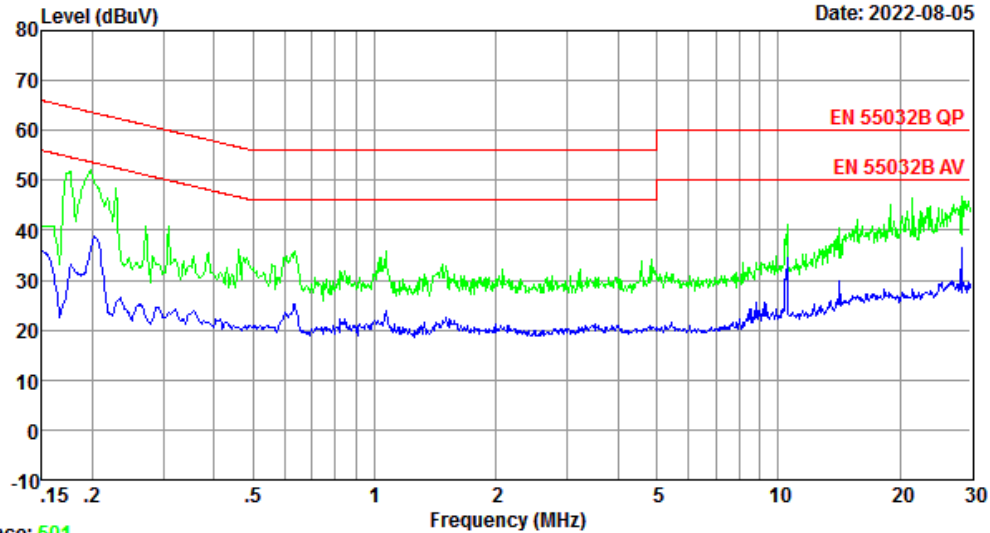


Trace: 501

Site no : 2#CE Shield Room Data no. : 502
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : LAN Mode

Data: 504

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

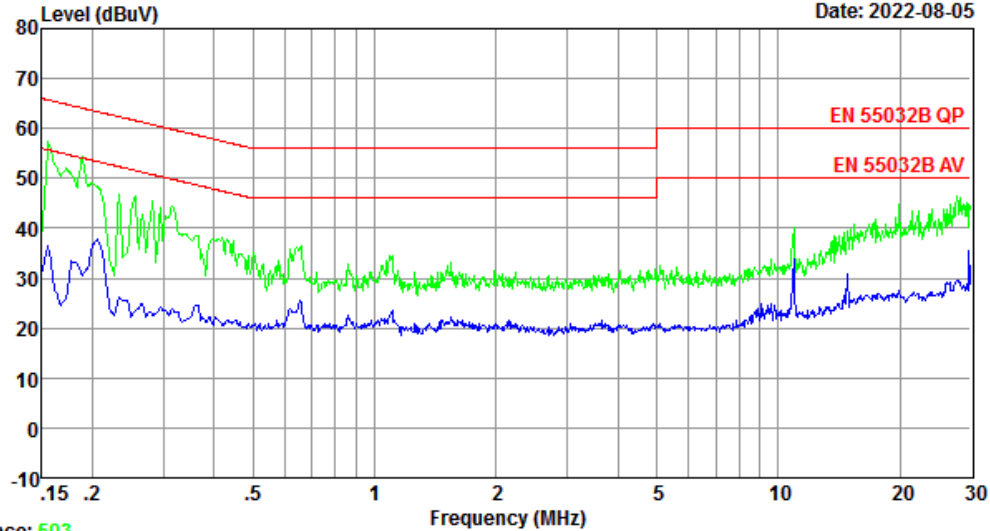


Trace: 503

Site no : 2#CE Shield Room Data no. : 504
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : LAN Mode

Data: 506

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

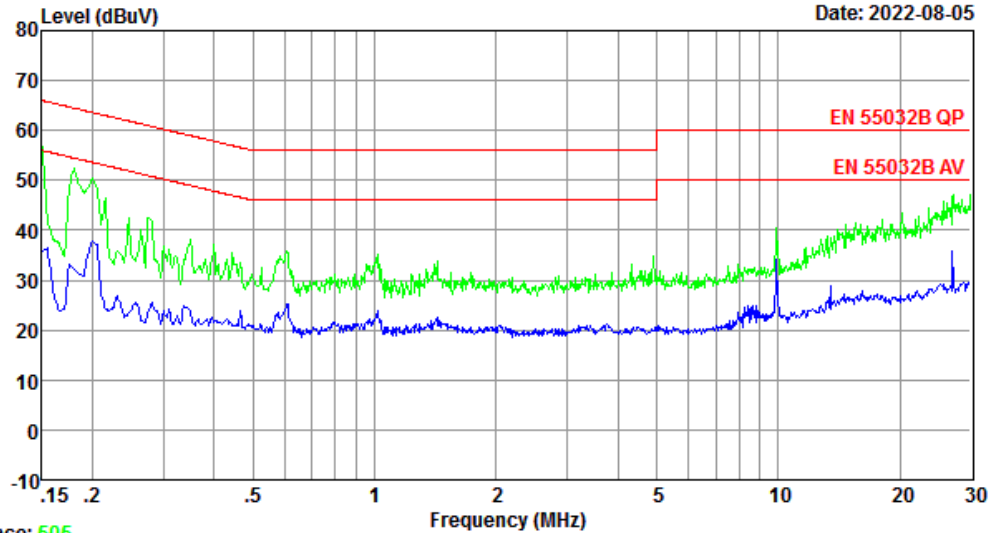


Trace: 505

Site no : 2#CE Shield Room Data no. : 506
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : LAN Mode

Data: 508

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

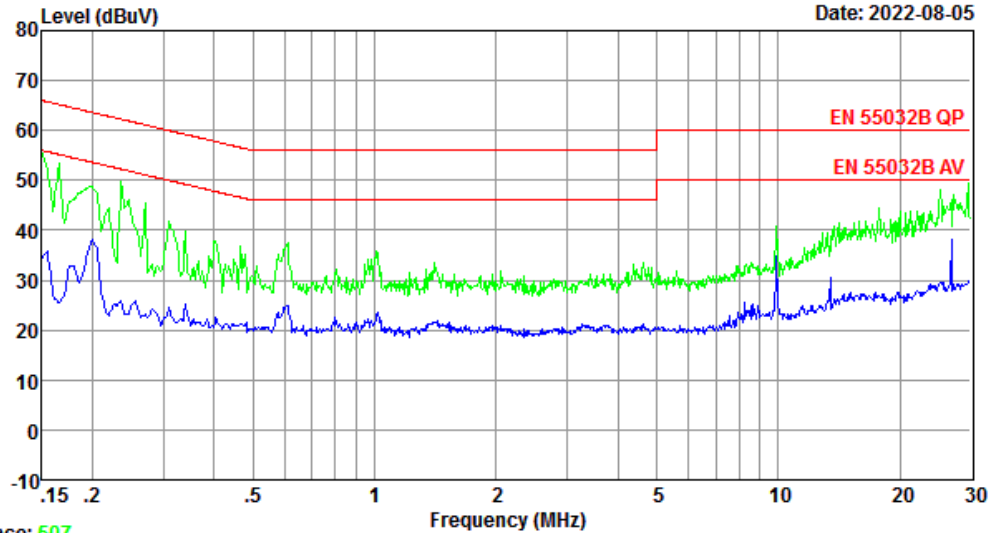


Trace: 507

Site no : 2#CE Shield Room Data no. : 508
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : LAN Mode

Data: 510

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

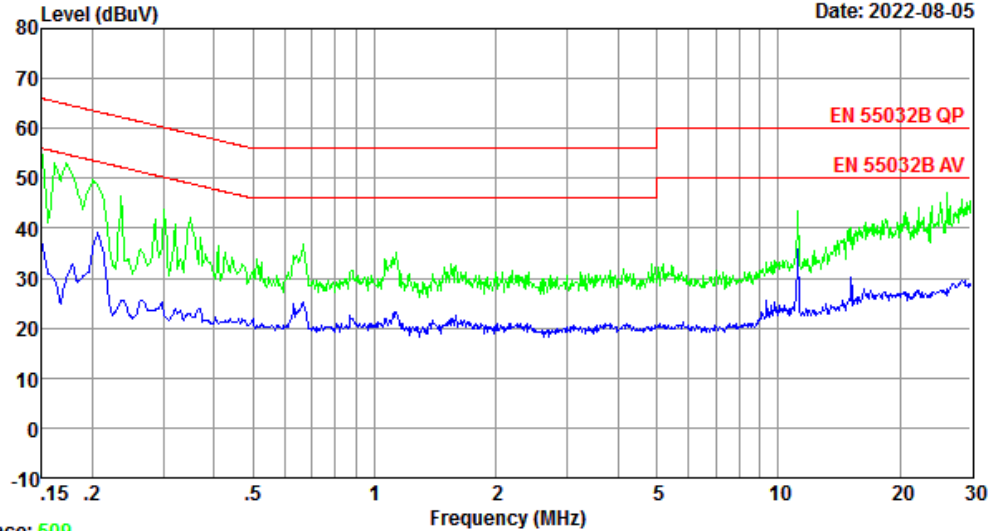


Trace: 509

Site no : 2#CE Shield Room Data no. : 510
Env. / Ins. : Temp:22.8℃ Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : USB Play

Data: 512

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

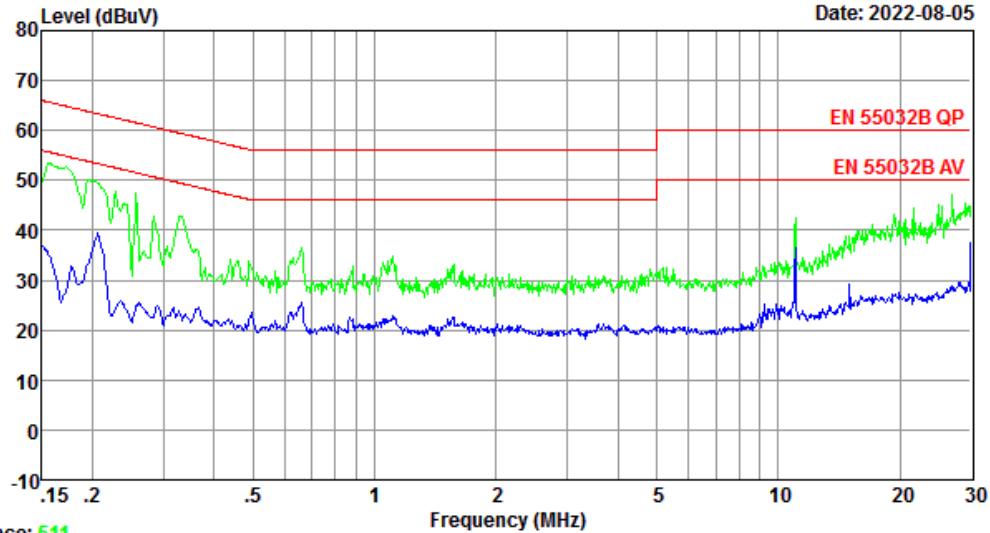


Trace: 511

Site no : 2#CE Shield Room Data no. : 512
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : USB Play

Data: 514

File: \\EMC-CE-2\\Test Data\\2022\\K\\Kang guan-1.EM6 (556)

Date: 2022-08-05

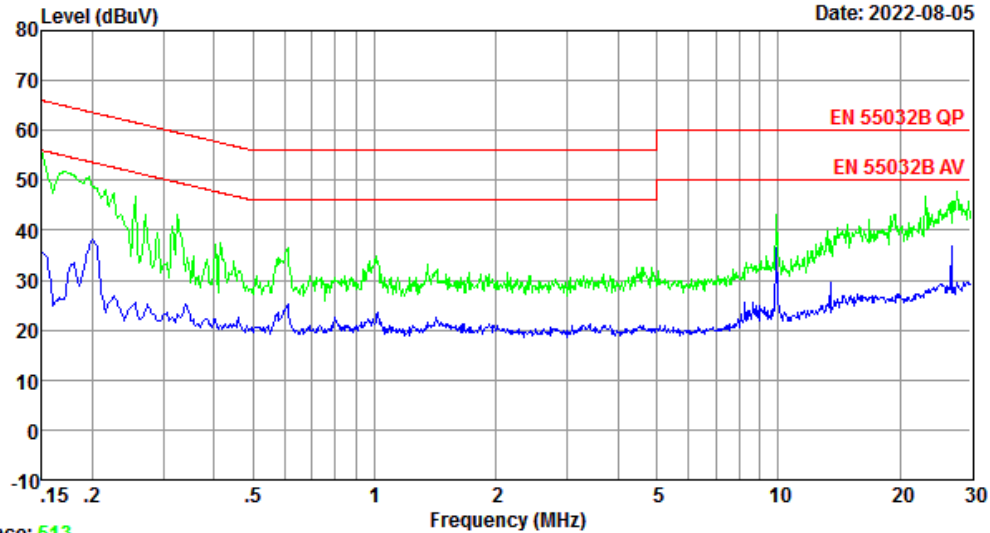


Trace: 513

Site no : 2#CE Shield Room Data no. : 514
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : LINE
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : USB Play

Data: 516

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

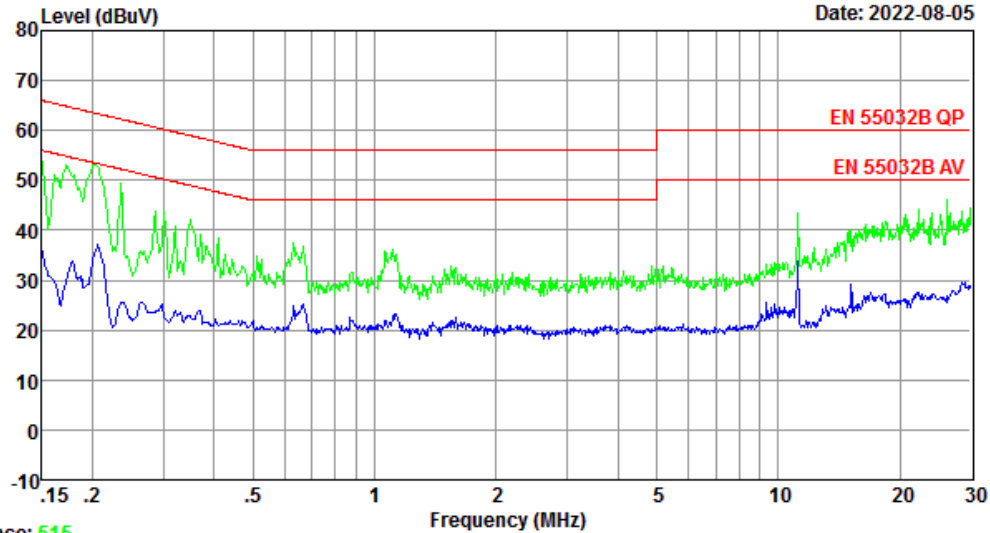

Trace: 515

Site no : 2#CE Shield Room Data no. : 516
Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase : NEUTRAL
Limit : EN 55032B QP
Engineer : XJF
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : USB Play

4.2. Asymmetric mode conducted emissions test

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 0.15 ~ 30MHz
Test Site : Shielded Room
Limits : EN 55032:2015+A11:2020 Class B

Test Setup

Date of test : Aug. 05, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : LAN Mode

The frequency range from 150 kHz to 30 MHz was investigated.


The bandwidth of the test receiver was set at 9 kHz.

Note: Test uncertainty: $\pm 4.18\text{dB}$ at a level of confidence of 95%.

Test Data

EST Technology


Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

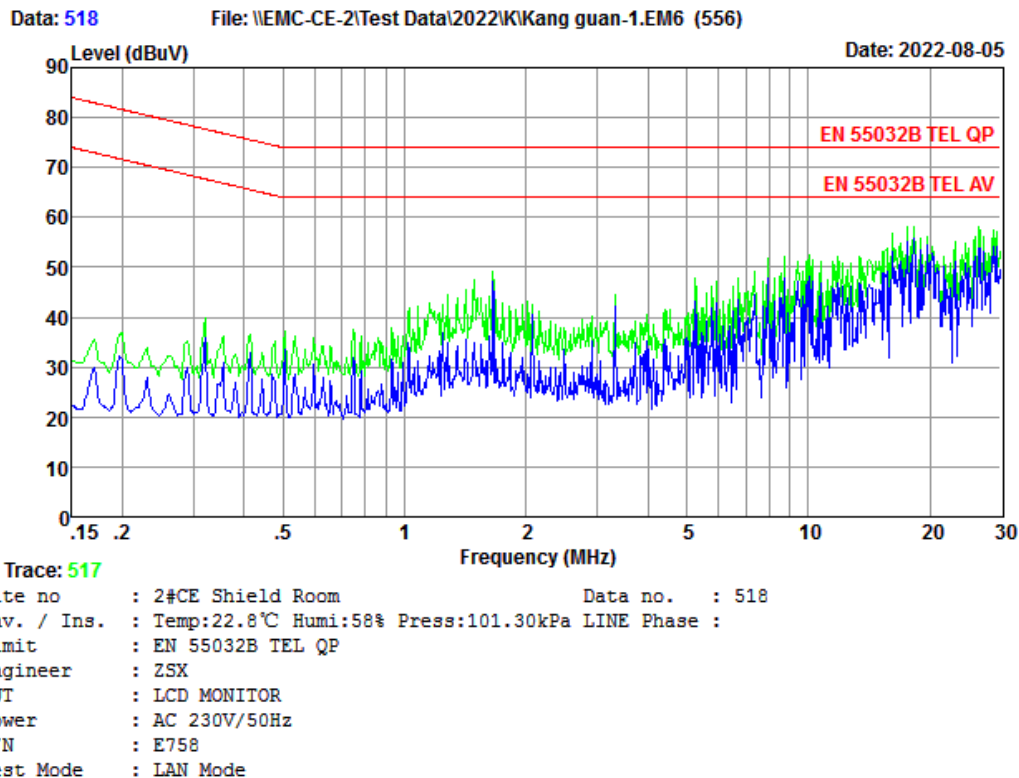

Data: 520

File: \\EMC-CE-2\Test Data\2022\K\Kang guan-1.EM6 (556)

Date: 2022-08-05

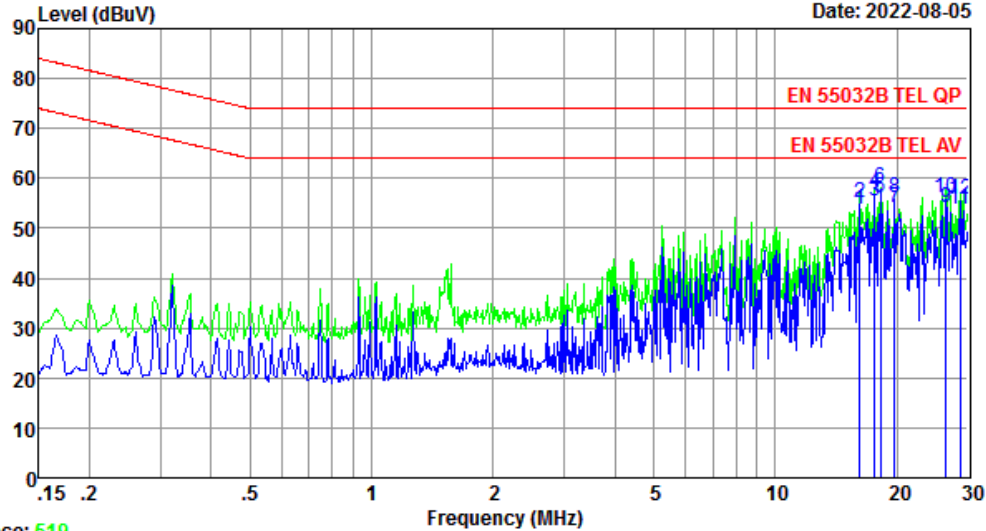

Site no : 2#CE Shield Room Data no. : 520
 Env. / Ins. : Temp:22.8°C Humi:58% Press:101.30kPa LINE Phase :
 Limit : EN 55032B TEL QP
 Engineer : ZSX
 EUT : LCD MONITOR
 Power : AC 110V/60Hz
 M/N : E758
 Test Mode : LAN Mode

	Freq. (MHz)	ISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	16.23	9.78	10.13	33.83	53.74	64.00	10.26	Average
2	16.23	9.78	10.13	35.16	55.07	74.00	18.93	QP
3	17.66	9.80	10.14	35.54	55.48	64.00	8.52	Average
4	17.66	9.80	10.14	37.25	57.19	74.00	16.81	QP
5	18.23	9.81	10.15	36.06	56.02	64.00	7.98	Average
6	18.23	9.81	10.15	38.09	58.05	74.00	15.95	QP
7	19.74	9.83	10.15	34.22	54.20	64.00	9.80	Average
8	19.74	9.83	10.15	36.22	56.20	74.00	17.80	QP
9	26.42	9.80	10.16	34.18	54.14	64.00	9.86	Average
10	26.42	9.80	10.16	36.15	56.11	74.00	17.89	QP
11	28.75	9.80	10.15	33.74	53.69	64.00	10.31	Average
12	28.75	9.80	10.15	35.76	55.71	74.00	18.29	QP

Remarks: 1. Emission Level= ISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4.3. Radiated Emission Test (30MHz-1000MHz)

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 30 ~ 1000MHz
Test Site : 10m Chamber
Limits : EN 55032:2015+A11:2020 Class B


Test Setup

Date of test : Aug. 09, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 10 m distance from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.

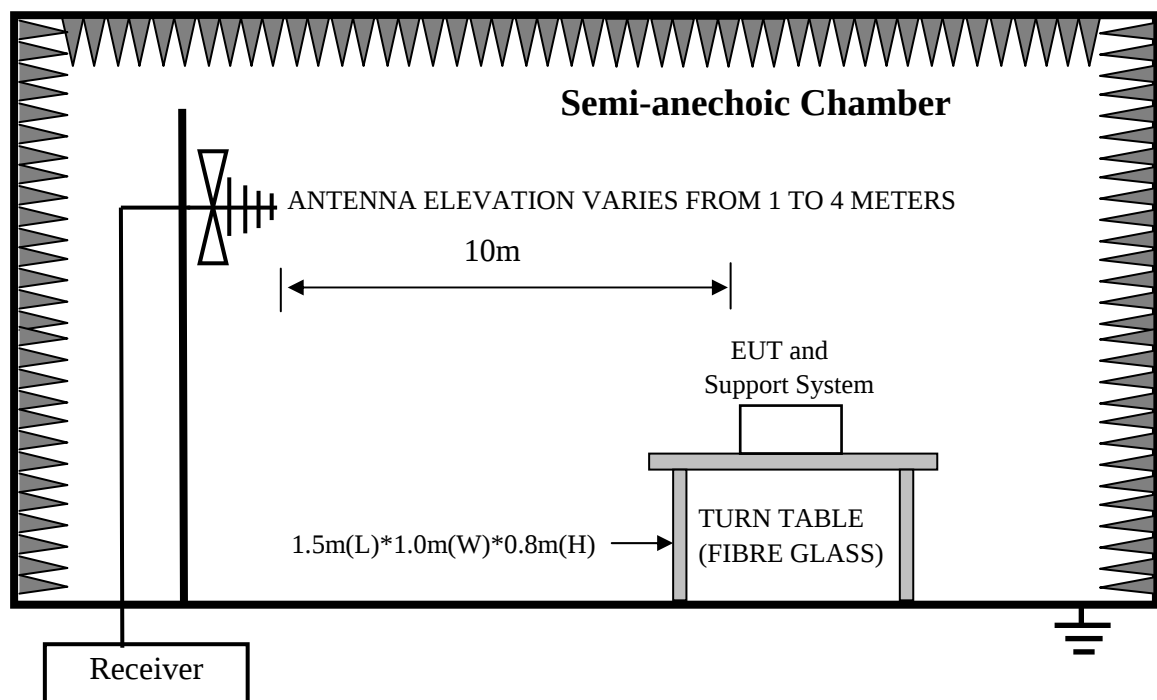

Note: Test uncertainty: ± 4.20 dB (H); ± 4.16 dB (V) at a level of confidence of 95%


Test Data



EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: <i>Vertical</i>	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

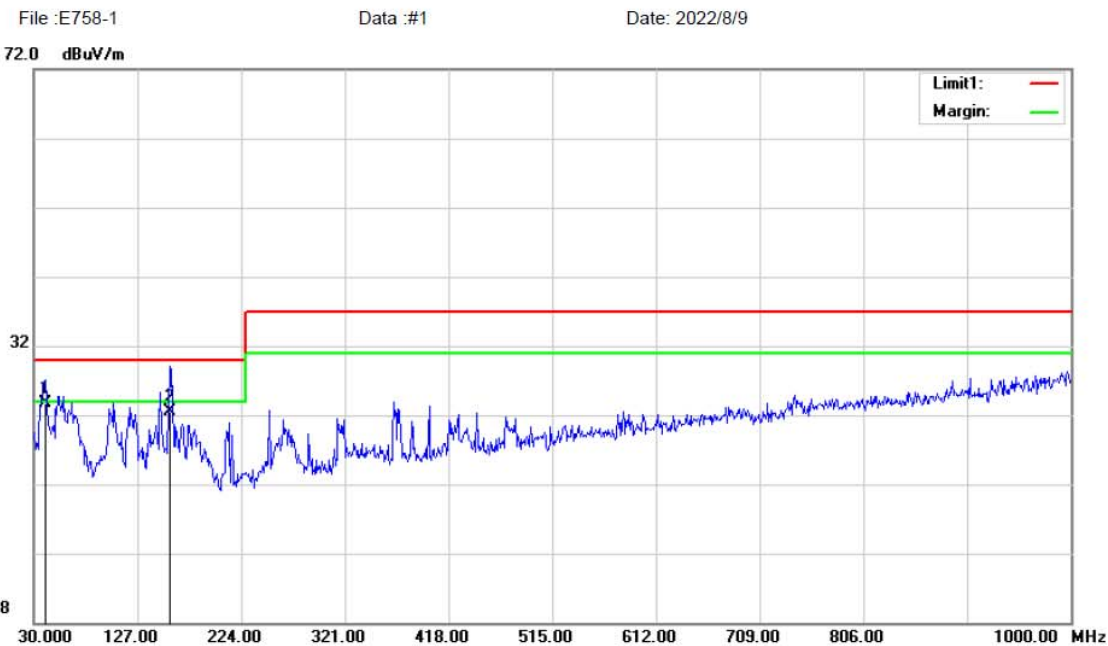

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40.6112	42.53	12.16	31.76	0.71	23.64	30.00	-6.36	QP	
2		157.3413	41.27	11.45	31.52	1.32	22.52	30.00	-7.48	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber Polarization: **Horizontal** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 230V/50Hz Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: E758

Radiated Emission

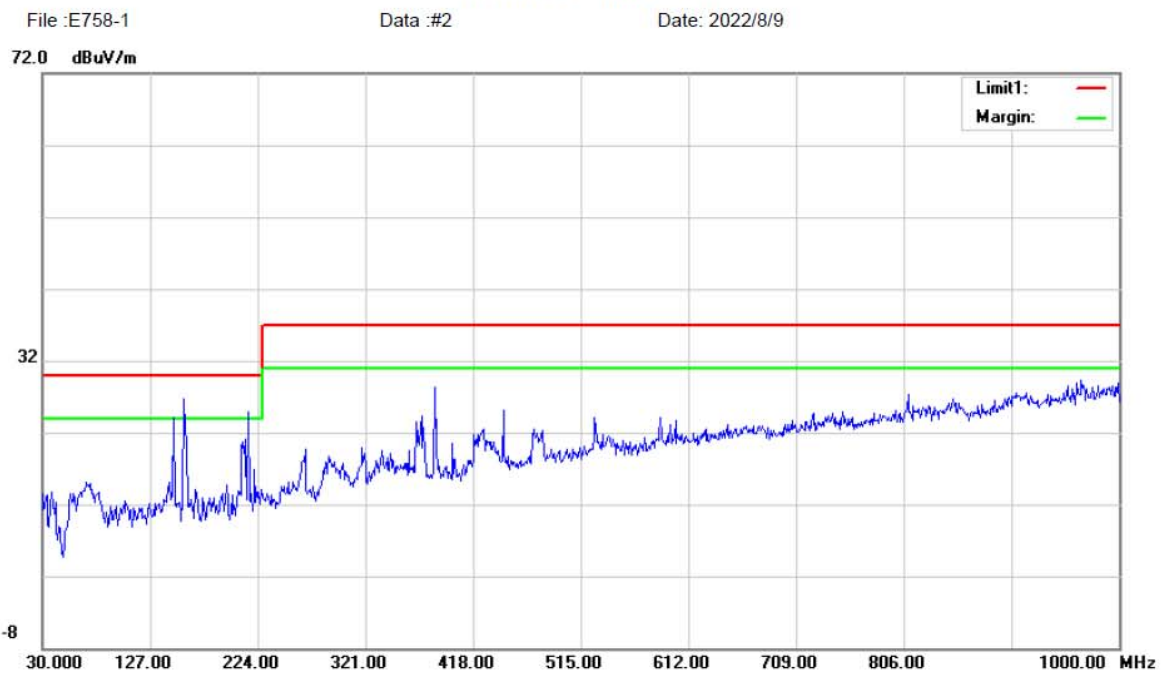

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber

Limit: EN 55032 B (10M)

Mode: HDMI 2 Mode(3840*2160)

EUT: LCD MONITOR

Note:

Polarization: **Vertical**

Power: AC 230V/50Hz

Distance: 10m

M/N: E758

Temperature: 23.6 (C)

Humidity: 56 %


Radiated Emission

File :E758-1

Data :#3

Date: 2022/8/9

72.0 dBuV/m

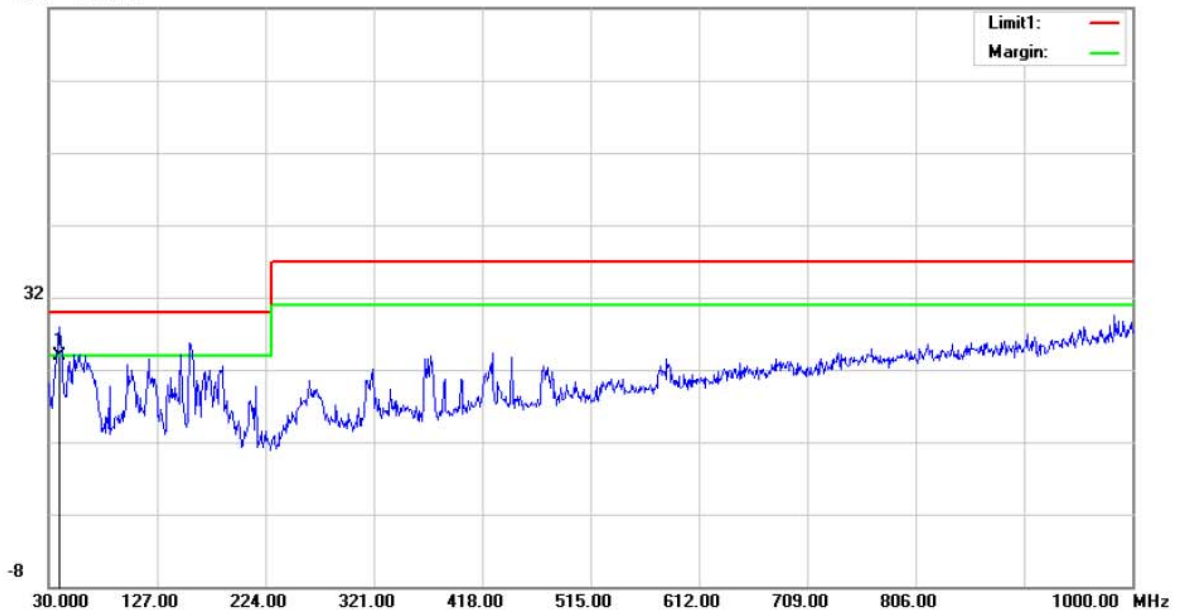

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39.9287	42.62	12.42	31.77	0.71	23.98	30.00	-6.02	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: Horizontal	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: HDMI 2 Mode(3840*2160)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

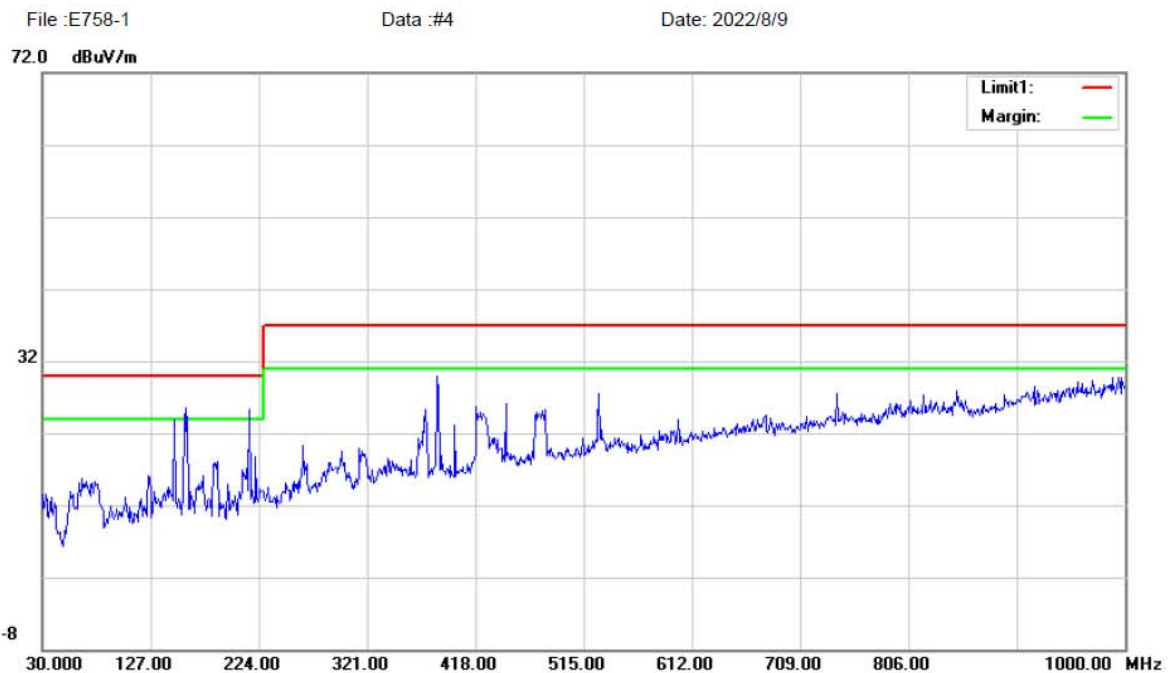

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: HDMI 3 Mode(3840*2160)
EUT: LCD MONITOR
Note:
Polarization: **Vertical**
Power: AC 230V/50Hz
Temperature: 23.6 (C)
Humidity: 56 %
Distance: 10m
M/N: E758

Radiated Emission

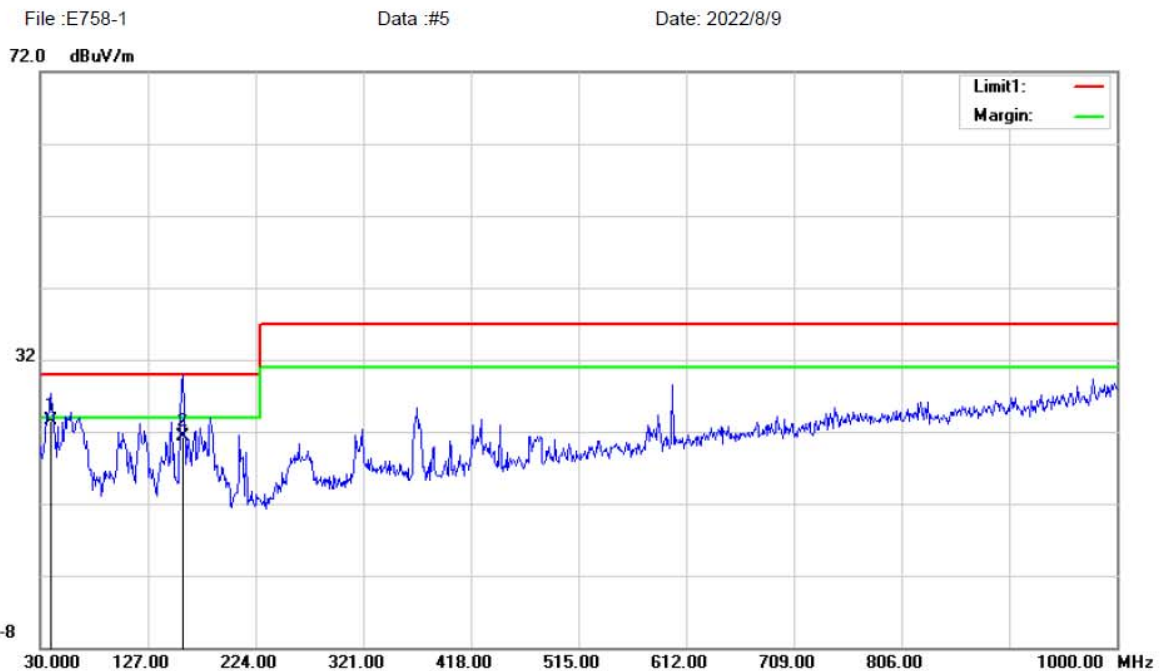

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40.0287	42.25	12.39	31.77	0.71	23.58	30.00	-6.42	QP	
2		159.5850	40.07	11.41	31.51	1.33	21.30	30.00	-8.70	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber

Limit: EN 55032 B (10M)

Mode: HDMI 3 Mode(3840*2160)

EUT: LCD MONITOR

Note:

Polarization: **Horizontal**

Power: AC 230V/50Hz

Temperature: 23.6 (C)

Humidity: 56 %

Distance: 10m

M/N: E758


Radiated Emission

File :E758-1

Data :#6

Date: 2022/8/9

72.0 dBuV/m

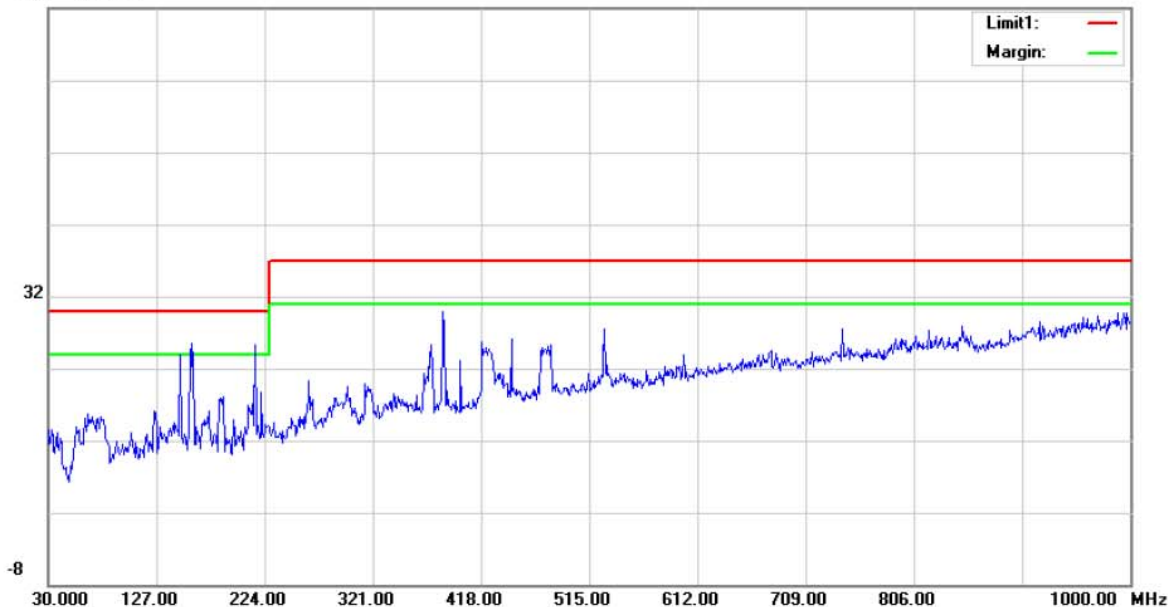

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: USB Play
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

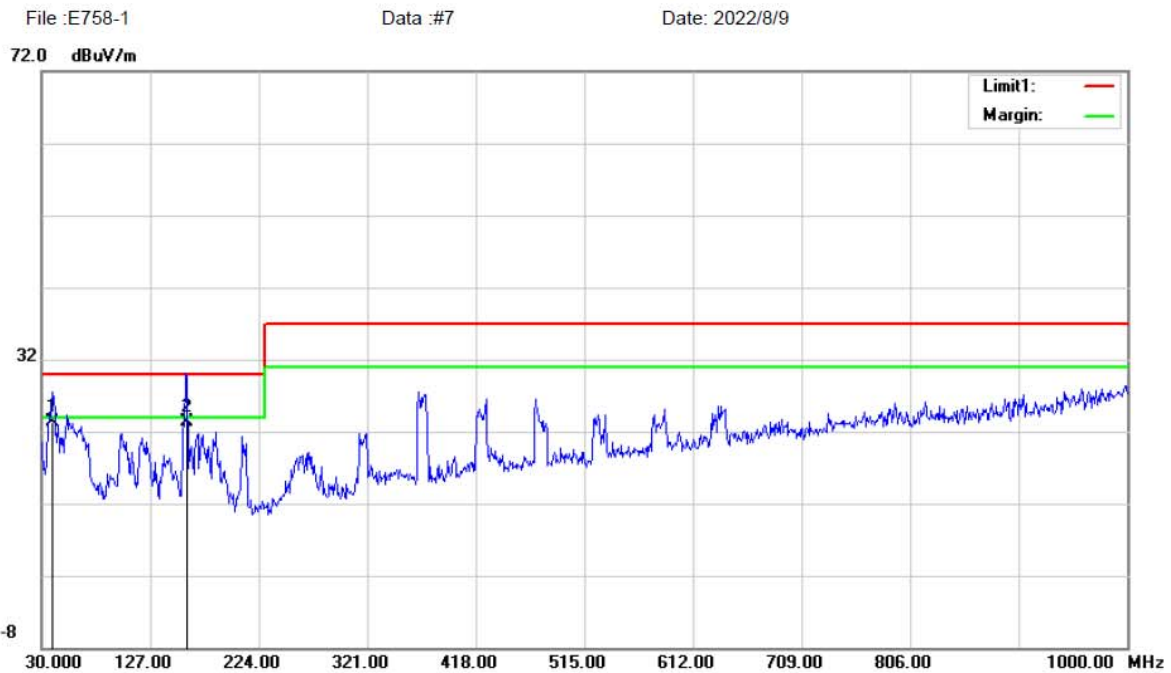

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		40.3712	42.02	12.25	31.77	0.71	23.21	30.00	-6.79	QP	
2	*	160.2700	42.19	11.36	31.51	1.33	23.37	30.00	-6.63	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: USB Play
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

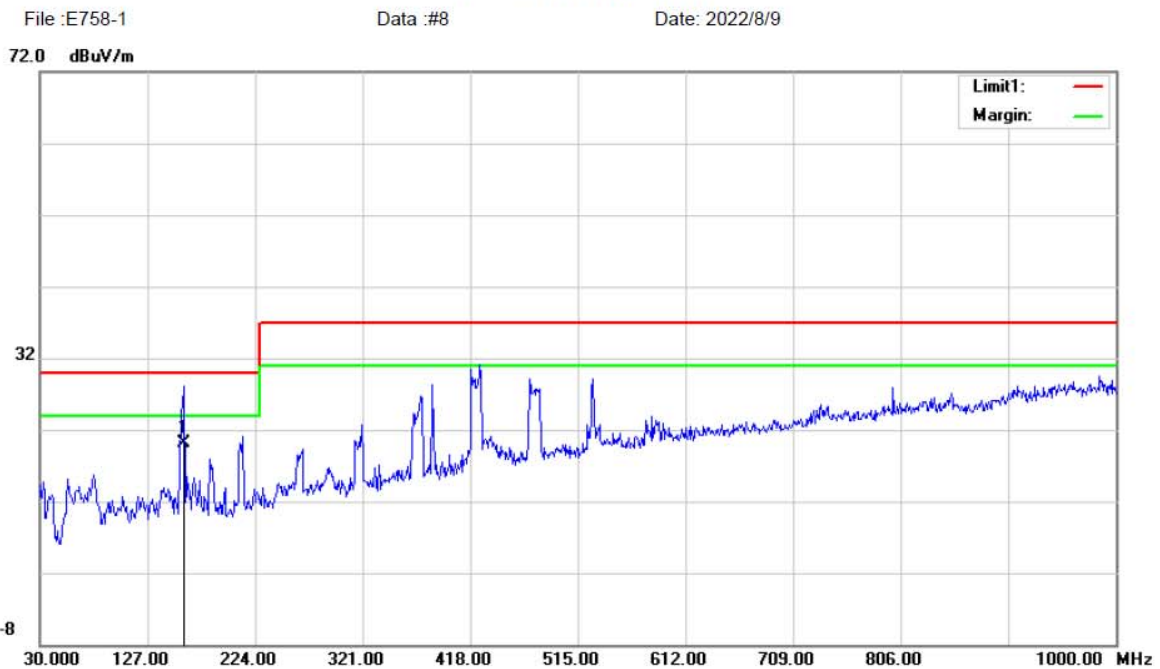

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	160.2713	38.61	11.16	31.63	1.9	20.04	30.00	-9.96	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: AV IN
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

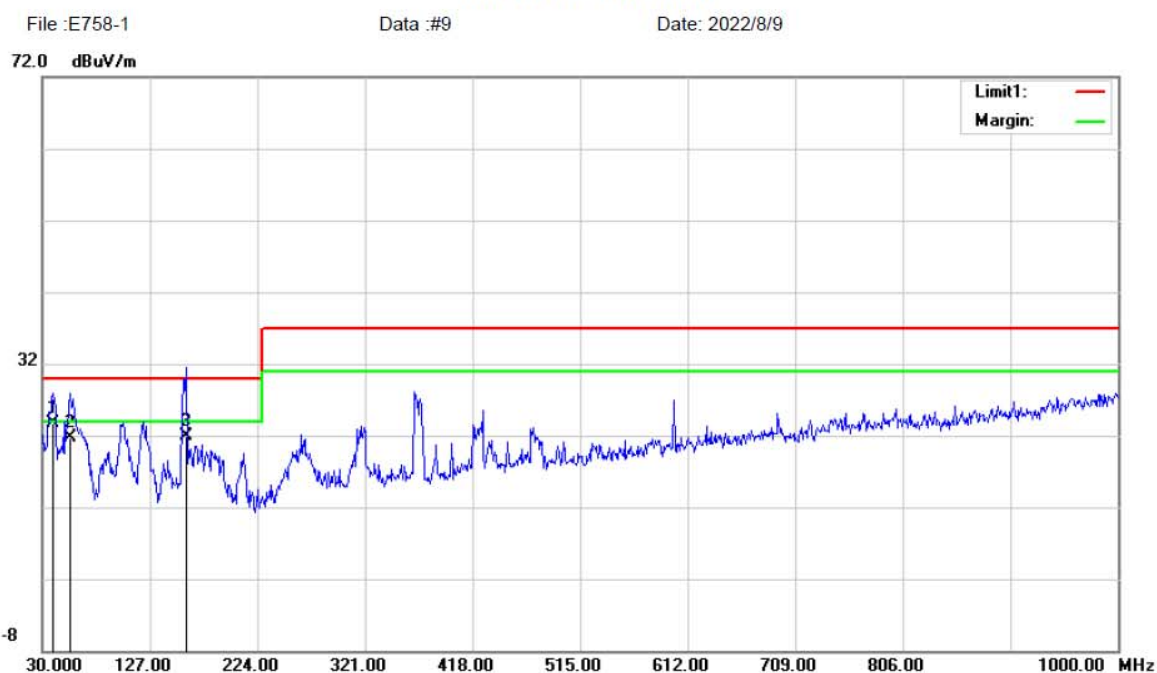

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40.1911	42.40	12.32	31.77	0.71	23.66	30.00	-6.34	QP	
2		55.8975	46.71	5.94	31.67	0.76	21.74	30.00	-8.26	QP	
3		160.3513	40.75	11.34	31.51	1.33	21.91	30.00	-8.09	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: Horizontal	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: AV IN		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

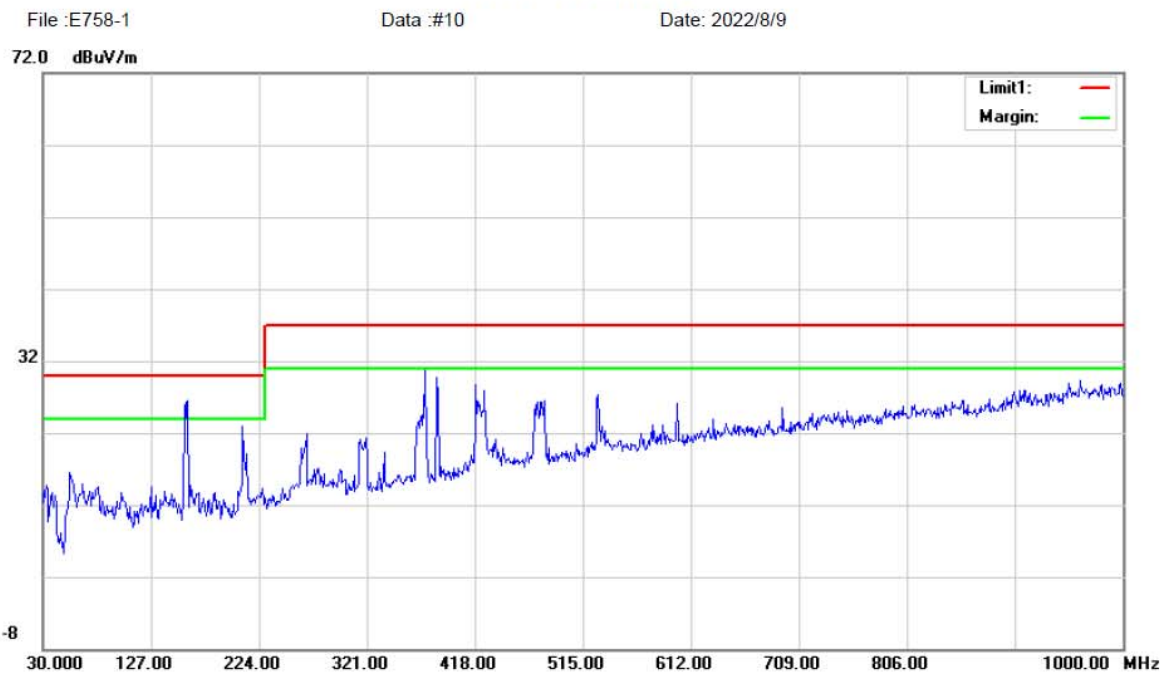

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
									Detector Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: Vertical	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 230V/50Hz	Humidity: 56 %
Mode: VGA Mode(1920*1080)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

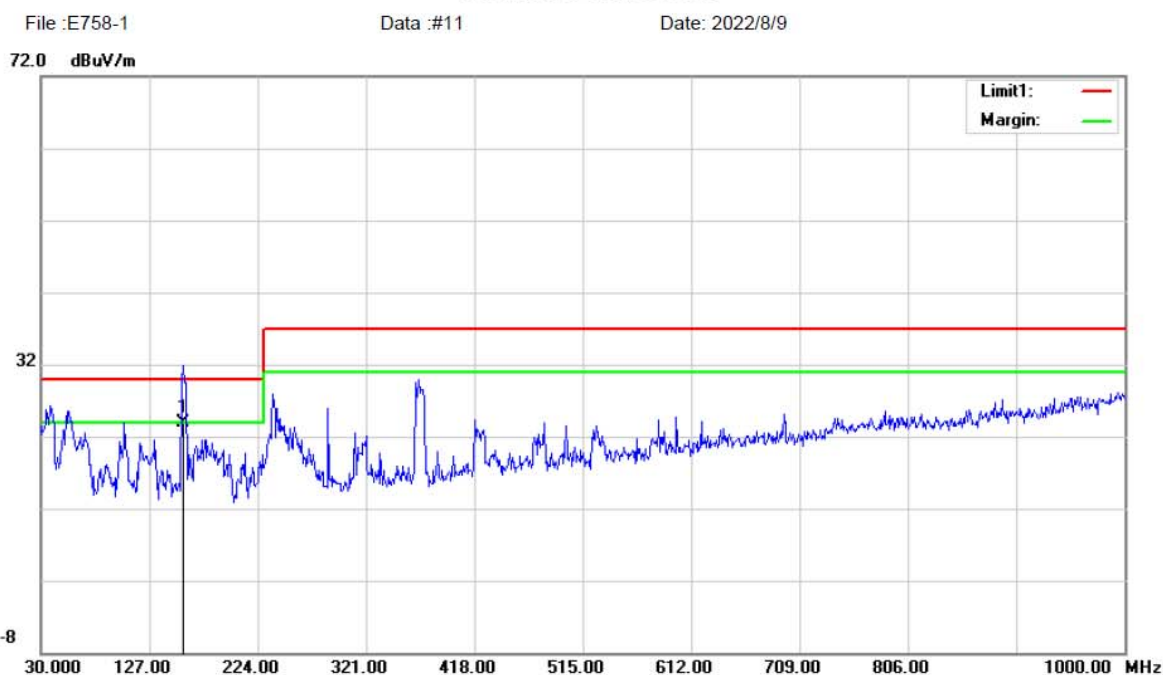

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	157.5438	42.70	11.45	31.52	1.32	23.95	30.00	-6.05	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: VGA Mode(1920*1080)
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

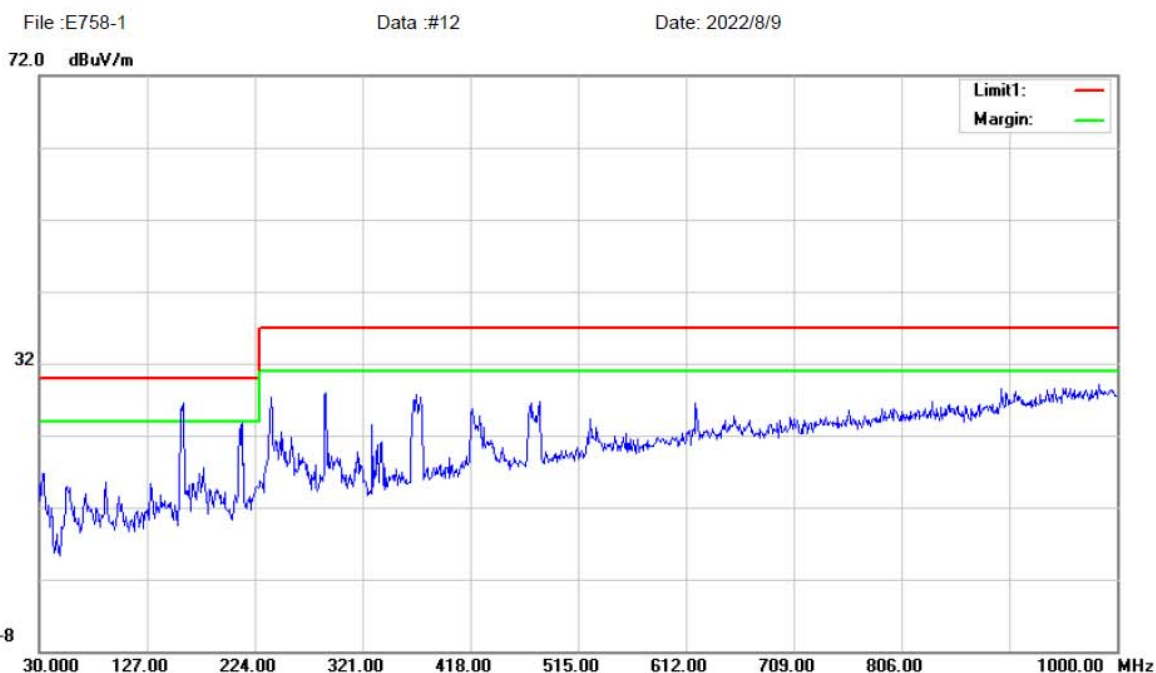

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over	
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector Comment

*:Maximum data x:Over limit l:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN Mode
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

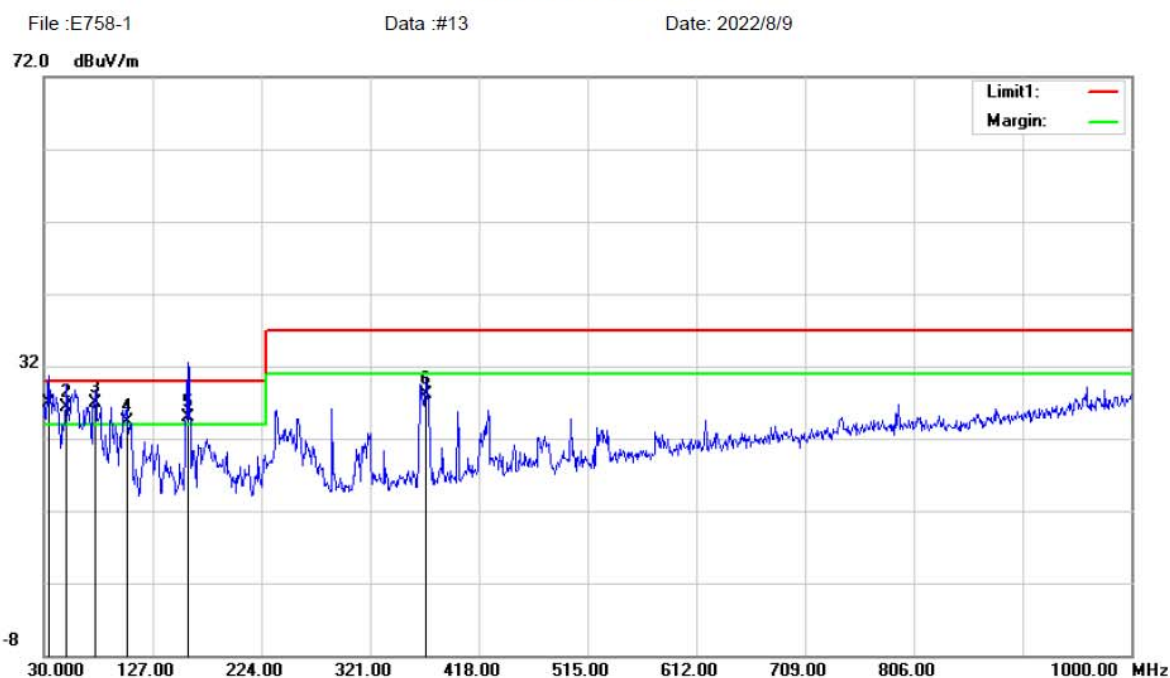

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	34.6337	42.62	15.39	31.68	0.62	26.95	30.00	-3.05	QP	
2	!	51.0738	49.33	8.02	31.71	0.72	26.36	30.00	-3.64	QP	
3	!	76.5662	50.36	7.02	31.56	1	26.82	30.00	-3.18	QP	
4	!	103.8412	44.37	10.26	31.48	1.15	24.30	30.00	-5.70	QP	
5	!	159.9737	43.77	11.4	31.51	1.33	24.99	30.00	-5.01	QP	
6		371.6825	41.52	15.82	31.28	2.04	28.10	37.00	-8.90	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN Mode
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 230V/50Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

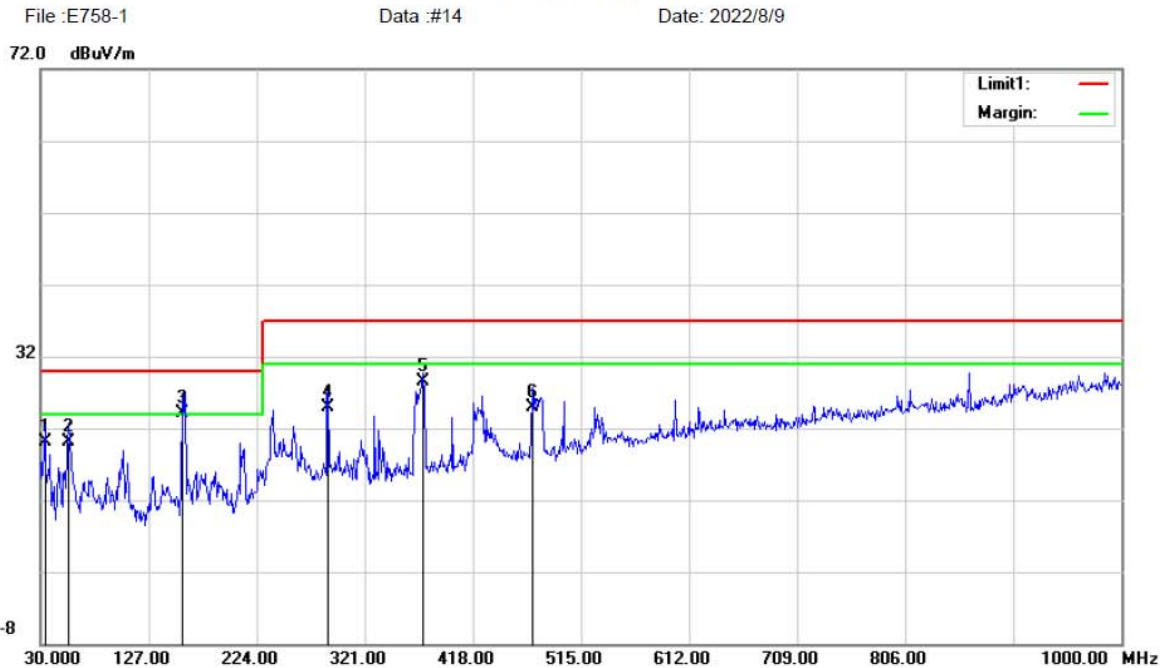

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		34.6074	35.44	15.61	31.77	0.86	20.14	30.00	-9.86	QP	
2		55.8262	44.82	6.06	31.88	1.07	20.07	30.00	-9.93	QP	
3	*	157.3125	42.68	11.2	31.64	1.88	24.12	30.00	-5.88	QP	
4		288.0200	40.26	13.68	31.61	2.63	24.96	37.00	-12.04	QP	
5		374.1075	41.22	15.46	31.31	3.06	28.43	37.00	-8.57	QP	
6		471.5923	34.82	17.93	31.37	3.49	24.87	37.00	-12.13	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: LAN Mode
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

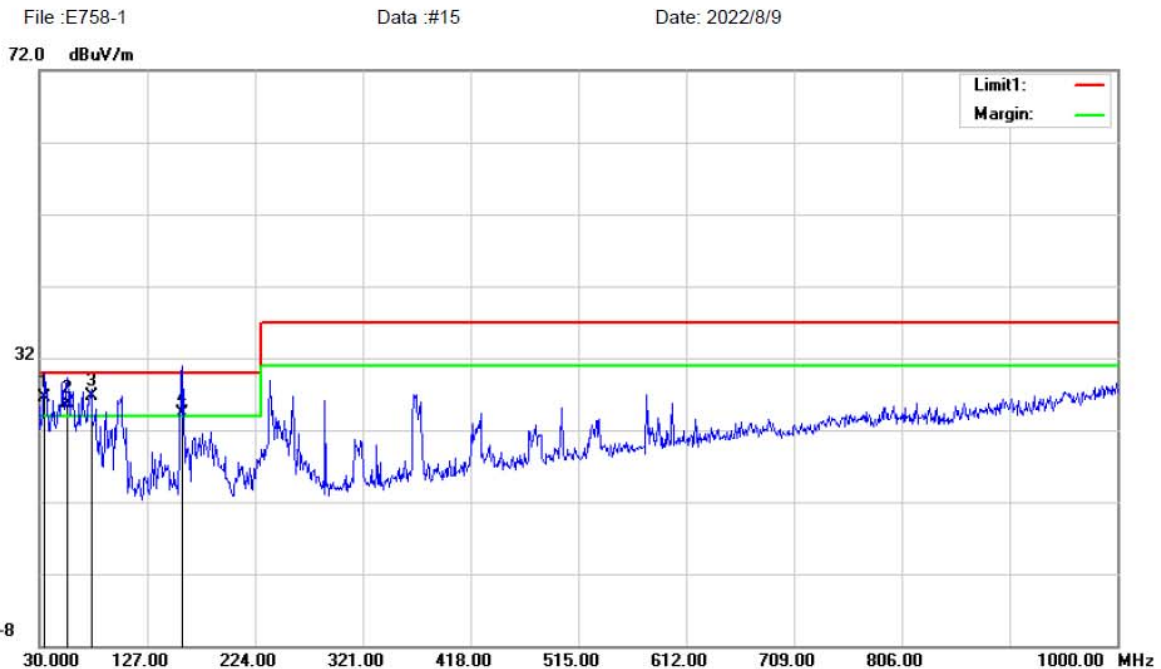

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	34.5890	42.18	15.42	31.68	0.62	26.54	30.00	-3.46	QP	
2	!	55.9338	50.66	5.93	31.67	0.76	25.68	30.00	-4.32	QP	
3	*	77.1913	50.17	7.11	31.56	1.01	26.73	30.00	-3.27	QP	
4	!	159.6012	43.05	11.41	31.51	1.33	24.28	30.00	-5.72	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site: 10m Chamber	Polarization: Horizontal	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: LAN Mode		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

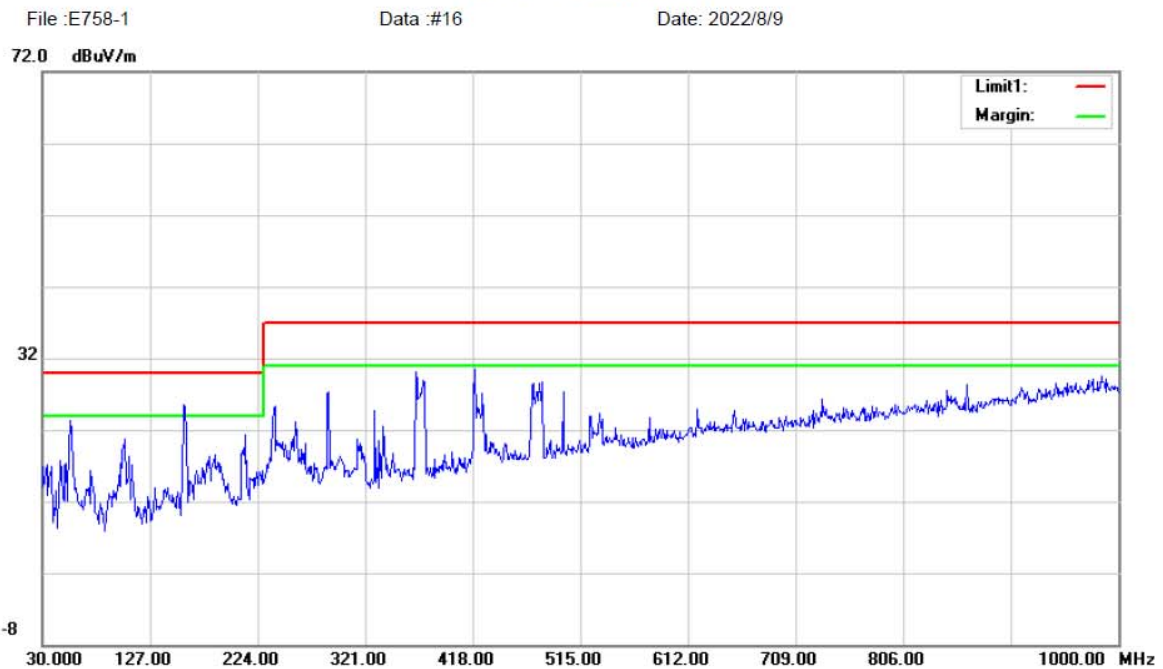

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
									Detector Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: Vertical	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: VGA Mode(1920*1080)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

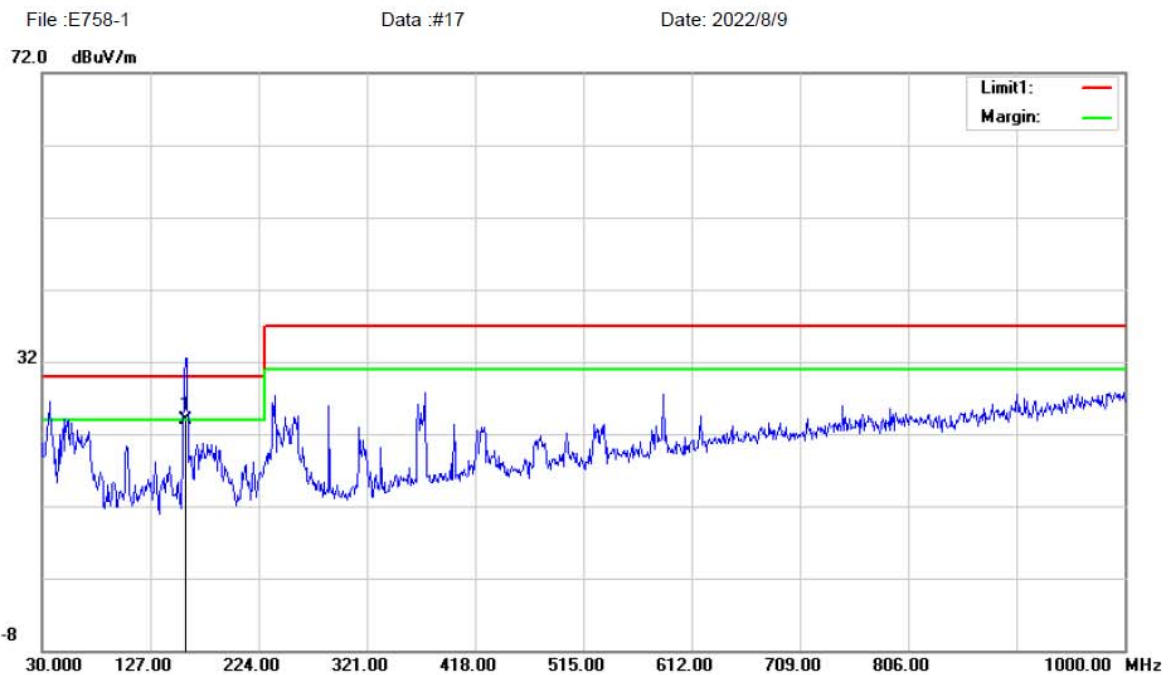

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	159.1212	42.74	11.42	31.51	1.33	23.98	30.00	-6.02	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: VGA Mode(1920*1080)
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

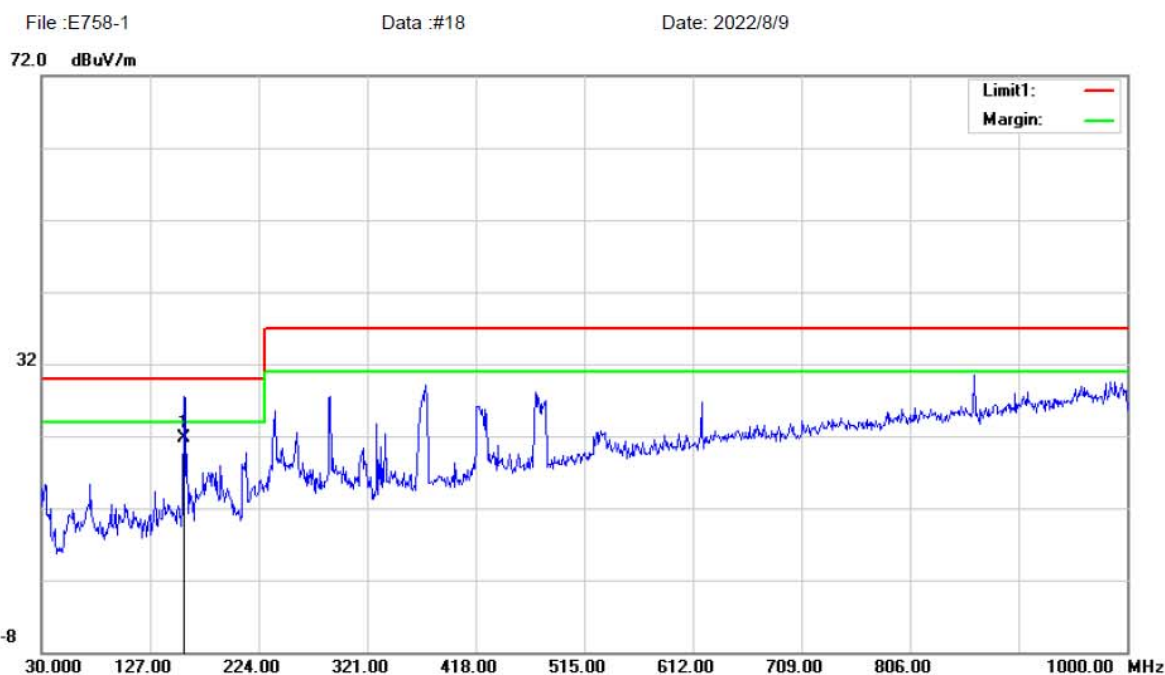

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	157.2537	40.25	11.2	31.64	1.88	21.69	30.00	-8.31	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: AV IN
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

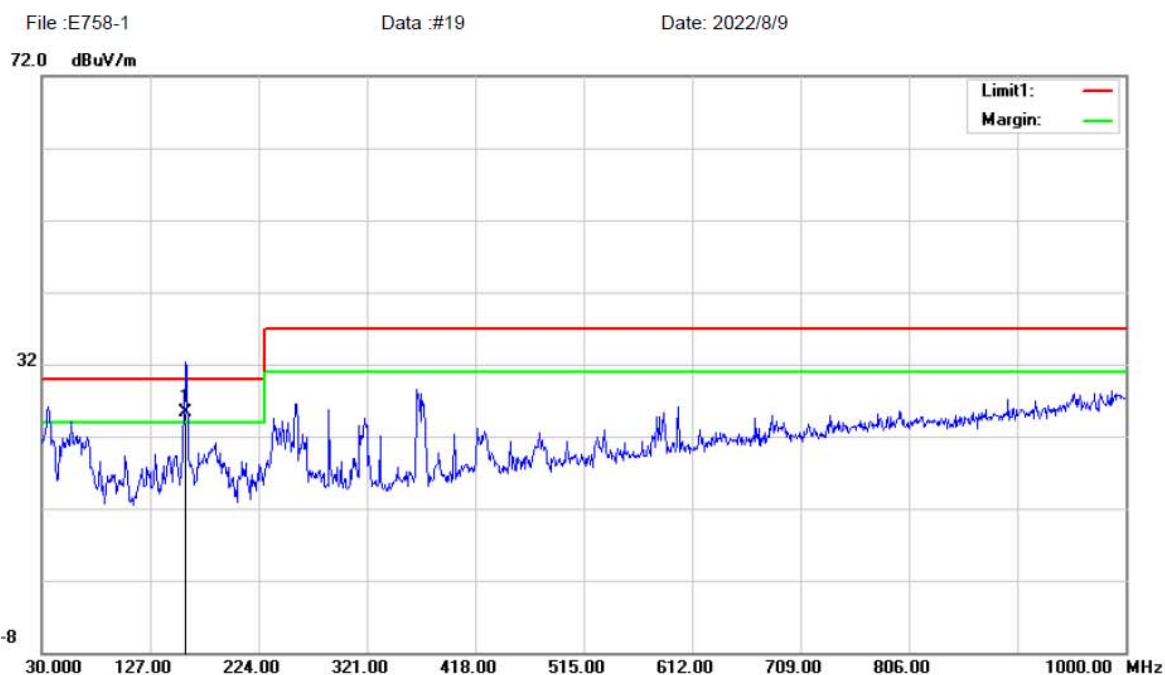

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	159.8987	44.08	11.4	31.51	1.33	25.30	30.00	-4.70	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: AV IN
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

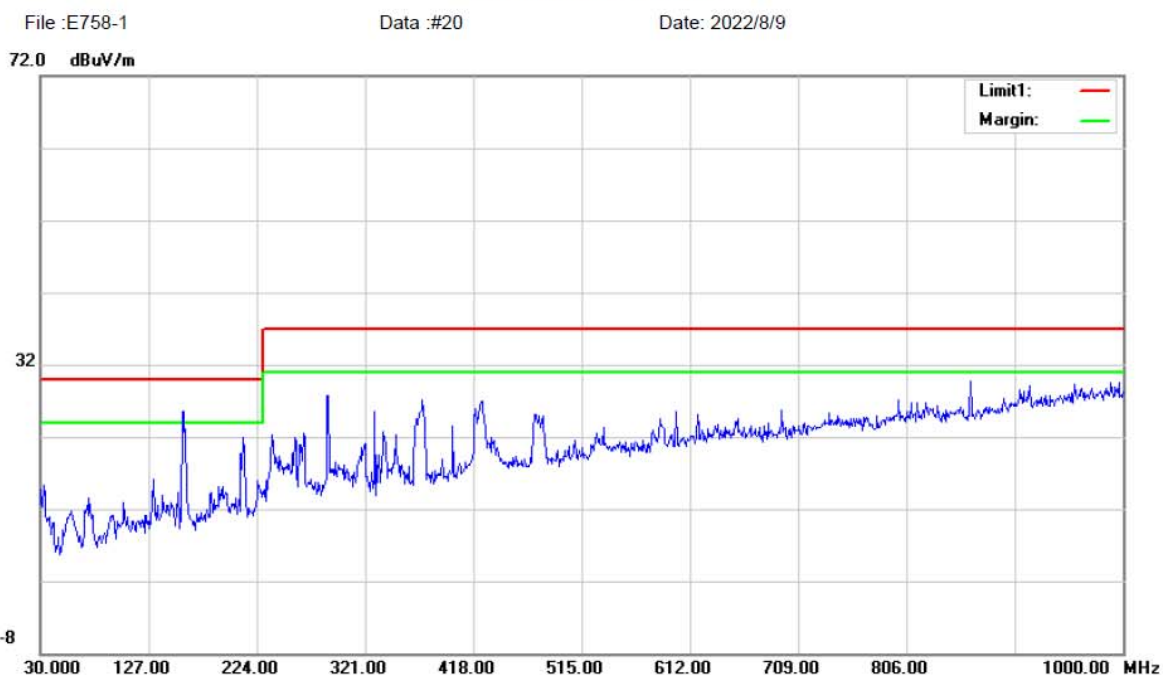

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: USB Play
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

File :E758-1

Data :#21

Date: 2022/8/9

72.0 dBuV/m



No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		37.0544	37.56	13.66	31.71	0.65	20.16	30.00	-9.84	QP	
2	*	159.8520	45.15	11.4	31.51	1.33	26.37	30.00	-3.63	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: USB Play
EUT: LCD MONITOR
Note:

Polarization: **Horizontal**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

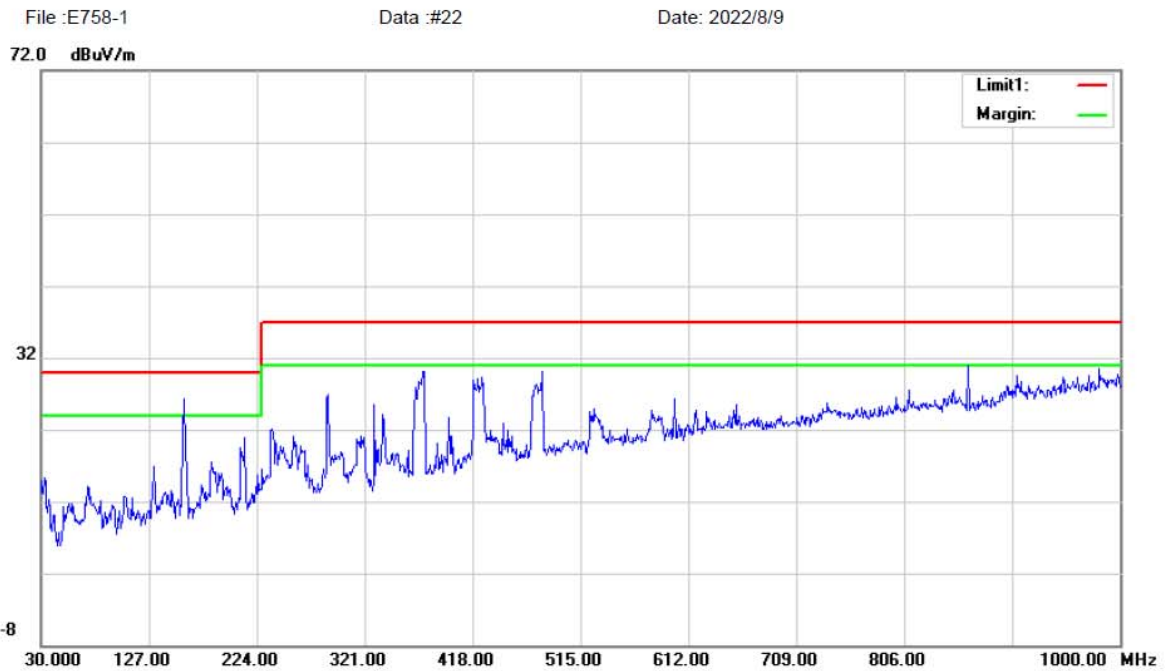

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
									Detector Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: HDMI 3 Mode(3840*2160)
EUT: LCD MONITOR
Note:
Polarization: **Vertical**
Power: AC 110V/60Hz
Temperature: 23.6 (C)
Humidity: 56 %
Distance: 10m
M/N: E758

Radiated Emission

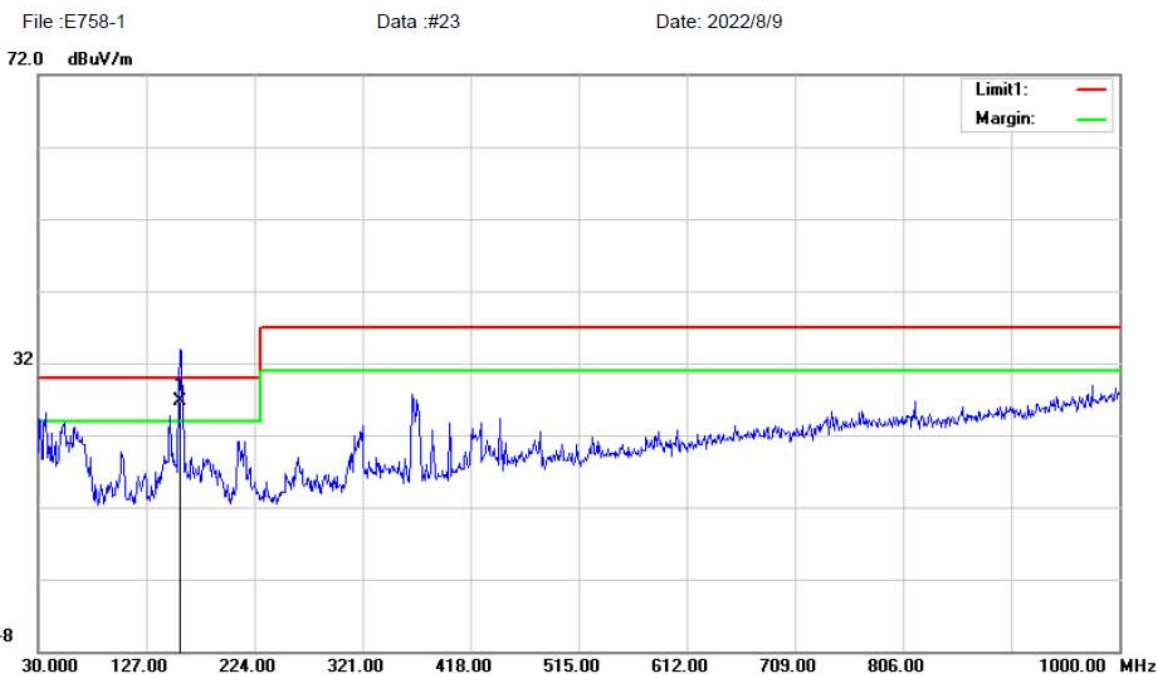

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	157.2820	45.48	11.45	31.52	1.32	26.73	30.00	-3.27	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:++86-769-83081888 Fax:++86-769-83081878

Site 10m Chamber Polarization: **Horizontal** Temperature: 23.6 (C)
Limit: EN 55032 B (10M) Power: AC 110V/60Hz Humidity: 56 %
Mode: HDMI 3 Mode(3840*2160)
EUT: LCD MONITOR Distance: 10m
Note: M/N: E758

Radiated Emission

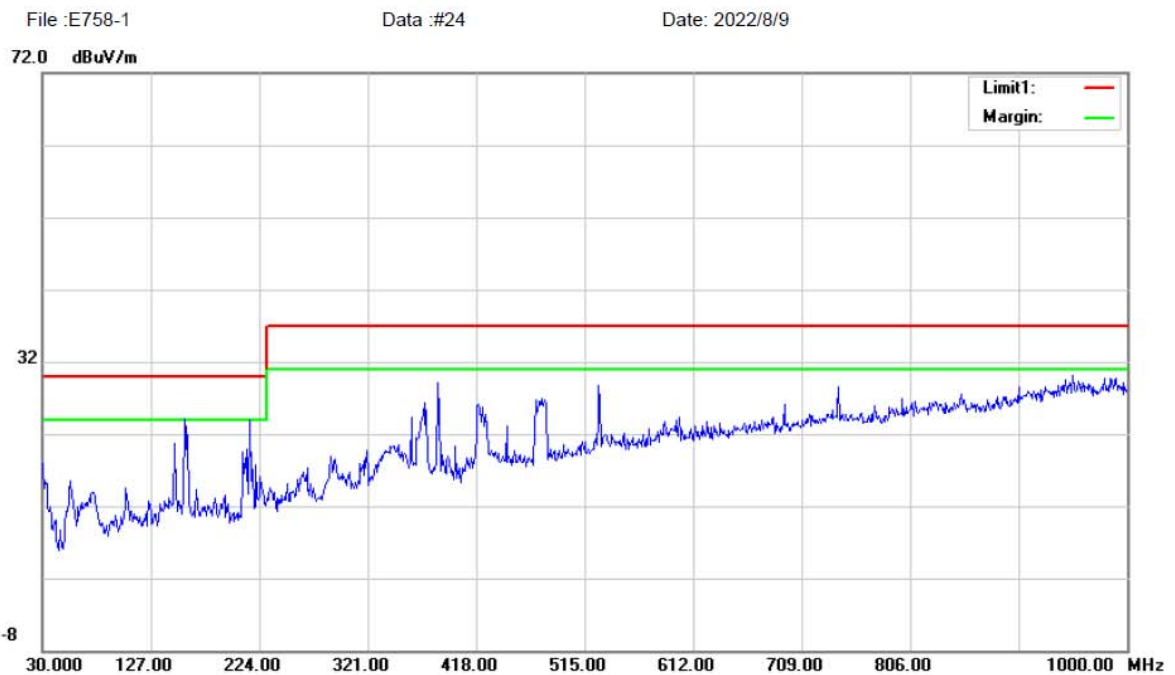

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
									Detector Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong,China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber

Limit: EN 55032 B (10M)

Mode: HDMI 2 Mode(3840*2160)

EUT: LCD MONITOR

Note:

Polarization: **Vertical**

Power: AC 110V/60Hz

Distance: 10m

M/N: E758

Temperature: 23.6 (C)

Humidity: 56 %

Radiated Emission

File :E758-1

Data :#25

Date: 2022/8/9

72.0 dBuV/m



No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	158.4913	42.68	11.43	31.51	1.33	23.93	30.00	-6.07	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.

2. Margin= Limit - Emission Level.

3. The emission levels that are 20dB below the official limit are not reported.





EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)

Mode: HDMI 2 Mode(3840*2160)
EUT: LCD MONITOR


Note:

Polarization: **Horizontal**
Power: AC 110V/60Hz

Temperature: 23.6 (C)
Humidity: 56 %

Distance: 10m
M/N: E758

Radiated Emission

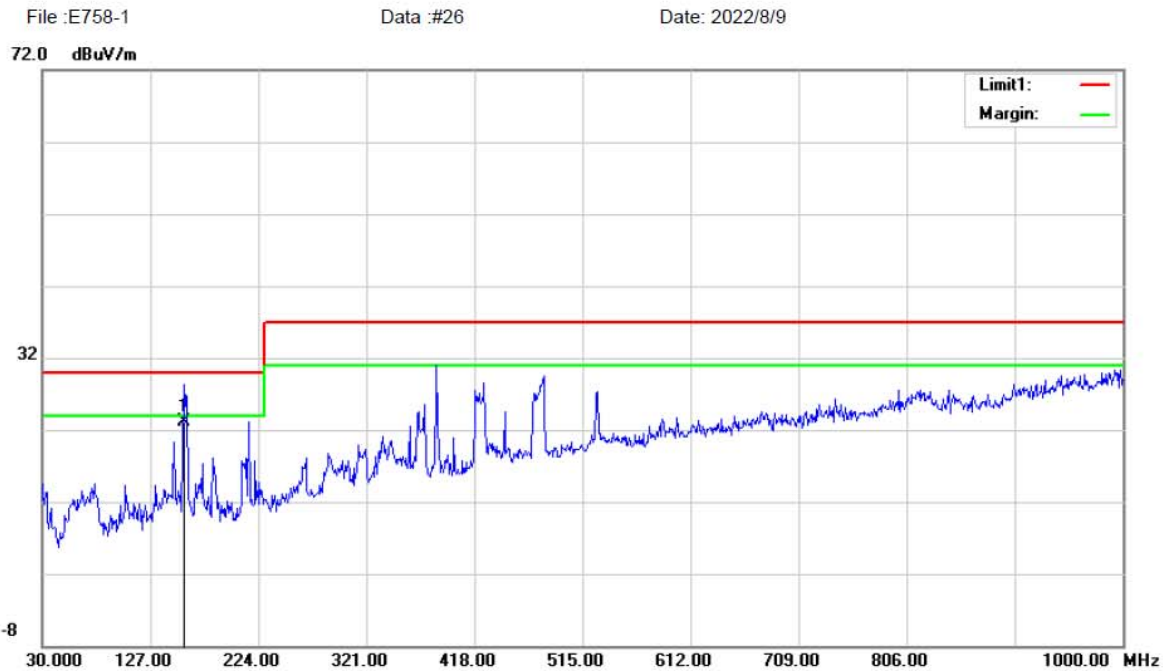

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	157.2956	41.59	11.2	31.64	1.88	23.03	30.00	-6.97	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co., Ltd
Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888 Fax: +86-769-83081878

Site 10m Chamber
Limit: EN 55032 B (10M)
Mode: HDMI 1 Mode(3840*2160)
EUT: LCD MONITOR
Note:

Polarization: **Vertical**
Power: AC 110V/60Hz
Distance: 10m
M/N: E758

Temperature: 23.6 (C)
Humidity: 56 %

Radiated Emission

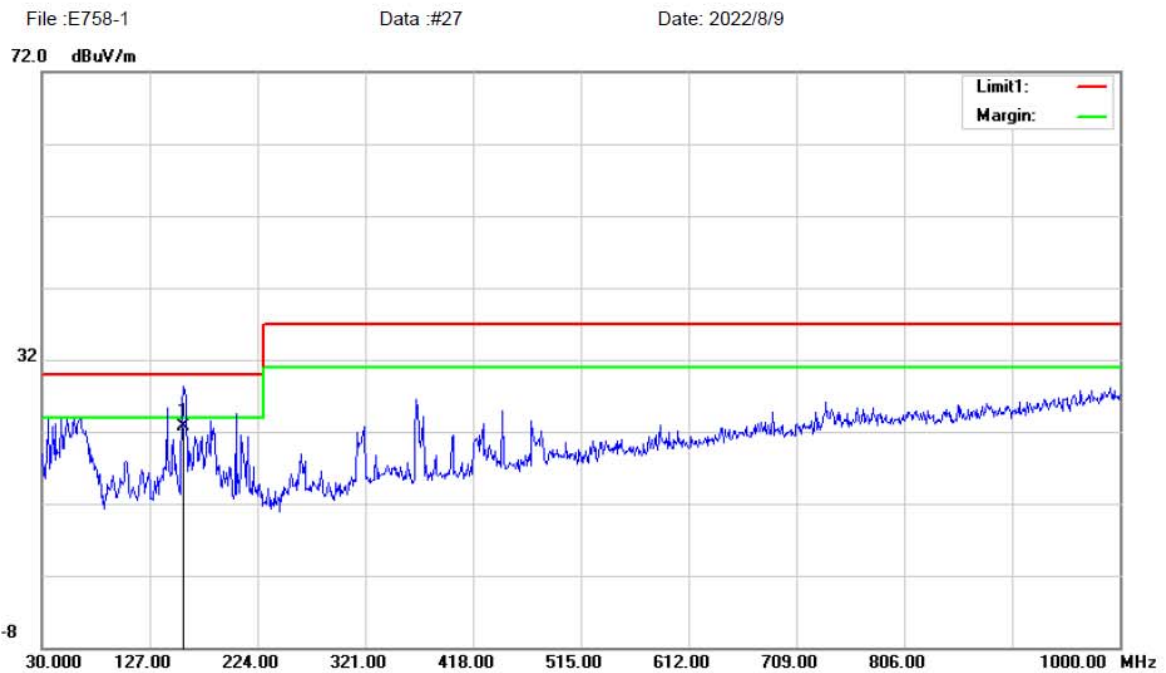

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	157.7850	41.41	11.44	31.52	1.32	22.65	30.00	-7.35	QP	

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.






EST Technology Co.,Ltd
Chilingxiang,Qishantou,Santun,Houjie,Dongguan,Guangdong, China
Tel:+86-769-83081888 Fax:+86-769-83081878

Site 10m Chamber	Polarization: Horizontal	Temperature: 23.6 (C)
Limit: EN 55032 B (10M)	Power: AC 110V/60Hz	Humidity: 56 %
Mode: HDMI 1 Mode(3840*2160)		
EUT: LCD MONITOR	Distance: 10m	
Note:	M/N: E758	

Radiated Emission

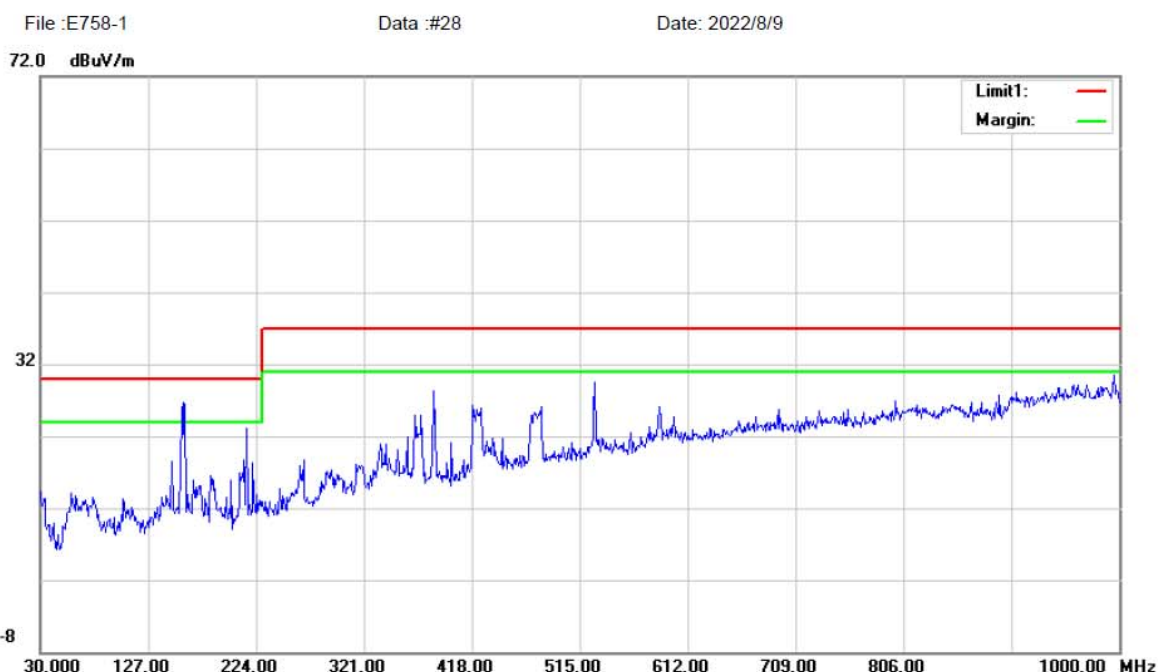

No.	Mk.	Freq.	Reading	Ant.	PreAmp	Cable	Level	Limit	Over		
		MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Detector	Comment

*:Maximum data x:Over limit !:over margin

Remarks: 1. Emission Level= Antenna Factor - Preamp + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.



4.4. Radiated Emission Test (above 1GHz)

RESULT : **Pass**
Test procedure : EN 55032:2015+A11:2020
Frequency range : 1GHz-6GHz
Test Site : 966 Chamber
Limits : EN 55032:2015+A11:2020 Class B


Test Setup

Date of test : Aug. 05, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector and Average detector from the spectrum, and all the final readings from the test receiver were measured with the Peak detector and Average detector.

The bandwidth setting on the test receiver was 1MHz(above 1GHz).

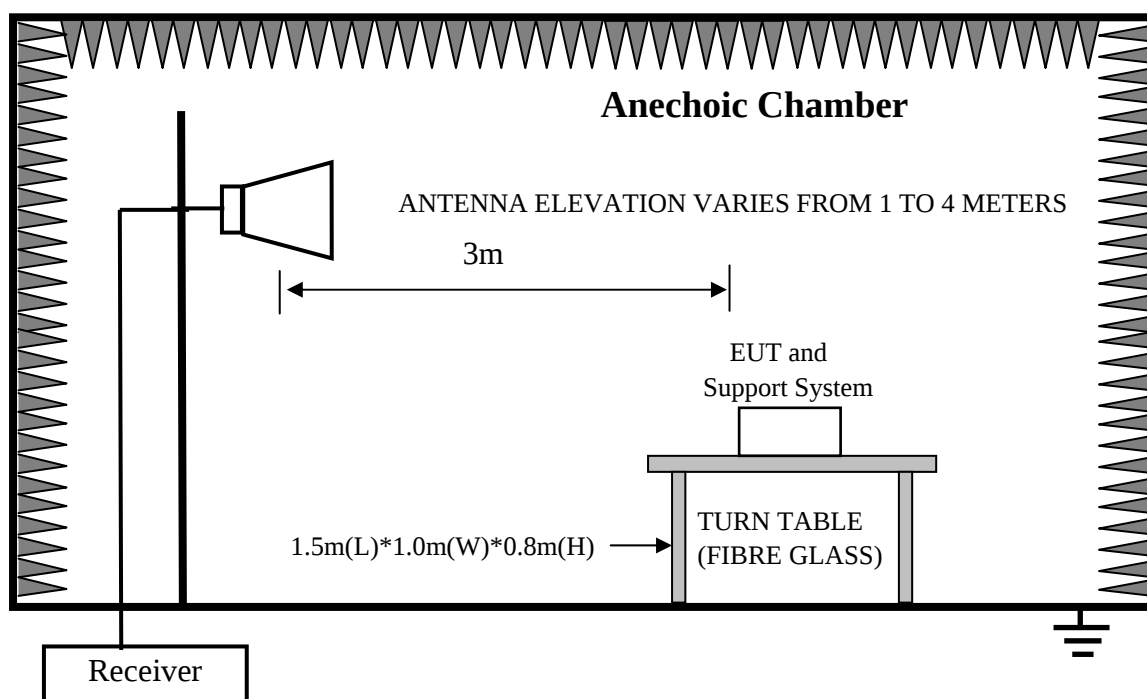



Note: Test uncertainty: $\pm 4.72\text{dB}$ at a level of confidence of 95%.

Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

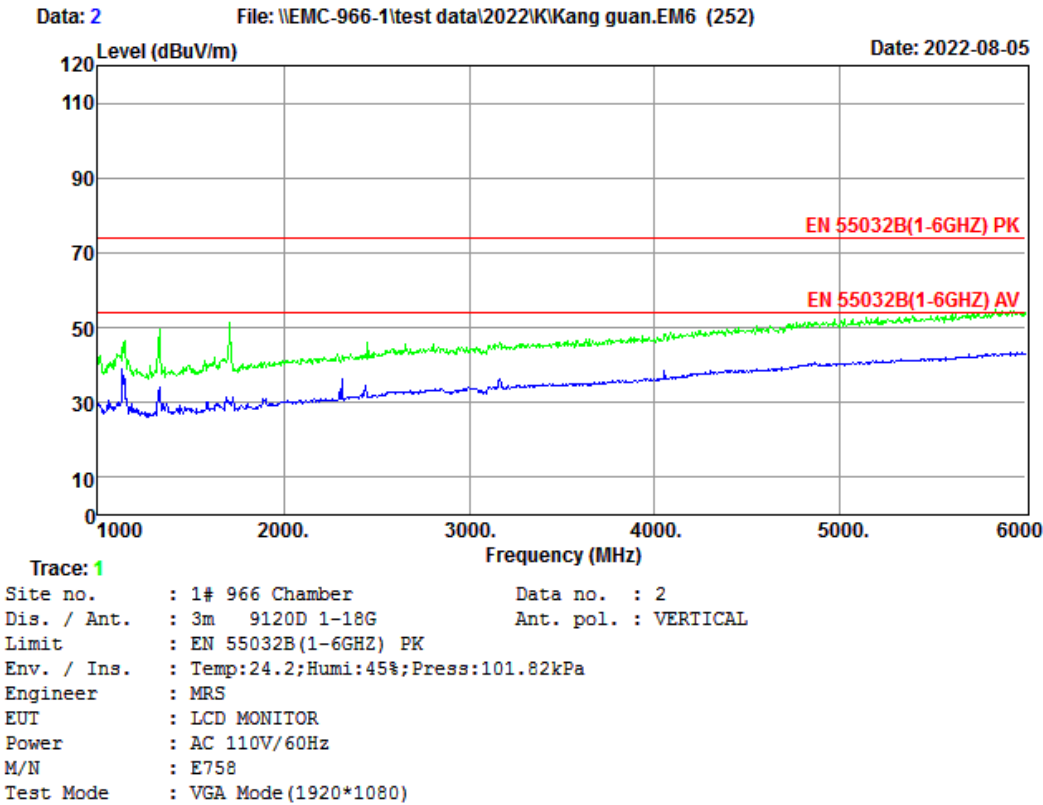


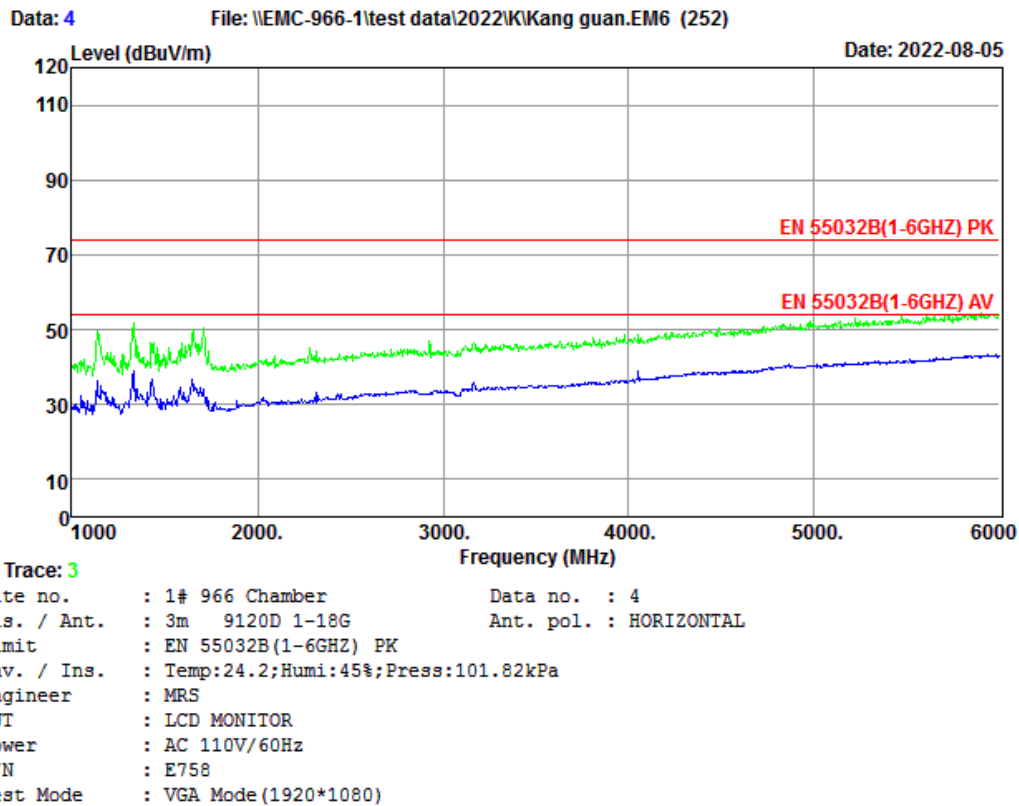

Data: 6

File: \\EMC-966-1\test data\2022\K\Kang guan.EM6 (252)

Date: 2022-08-05

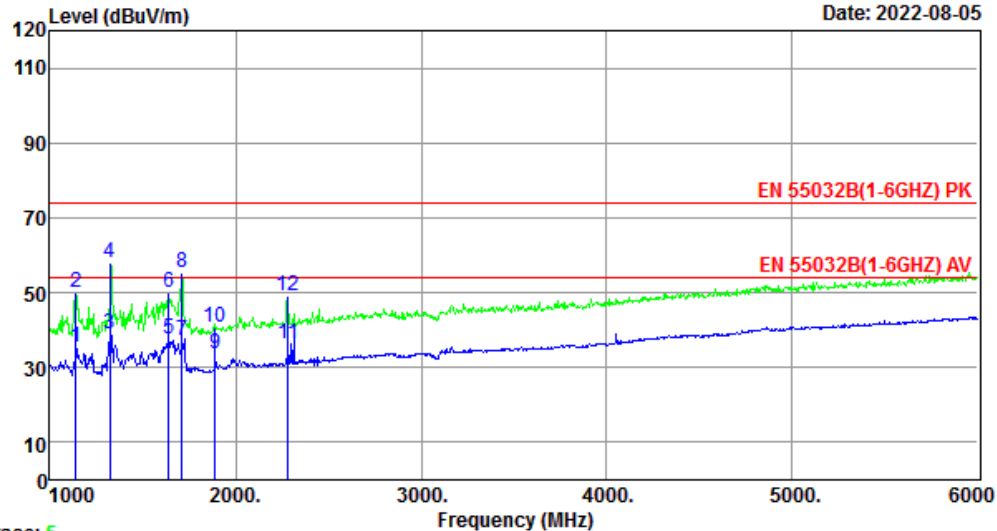

Trace: 5
 Site no. : 1# 966 Chamber Data no. : 6
 Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : EN 55032B(1-6GHZ) PK
 Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
 Engineer : MRS
 EUT : LCD MONITOR
 Power : AC 230V/50Hz
 M/N : E758
 Test Mode : VGA Mode(1920*1080)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1140.00	24.23	2.24	9.12	35.59	54.00	18.41	Average
2	1140.00	24.23	2.24	23.35	49.82	74.00	24.18	Peak
3	1325.00	24.36	2.35	12.40	39.11	54.00	14.89	Average
4	1325.00	24.36	2.35	31.44	58.15	74.00	15.85	Peak
5	1640.00	25.28	2.53	9.62	37.43	54.00	16.57	Average
6	1640.00	25.28	2.53	22.40	50.21	74.00	23.79	Peak
7	1710.00	25.38	2.57	9.28	37.23	54.00	16.77	Average
8	1710.00	25.38	2.57	27.47	55.42	74.00	18.58	Peak
9	1890.00	26.08	2.67	5.07	33.82	54.00	20.18	Average
10	1890.00	26.08	2.67	12.13	40.88	74.00	33.12	Peak
11	2285.00	27.19	3.01	6.18	36.38	54.00	17.62	Average
12	2285.00	27.19	3.01	19.04	49.24	74.00	24.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 8

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

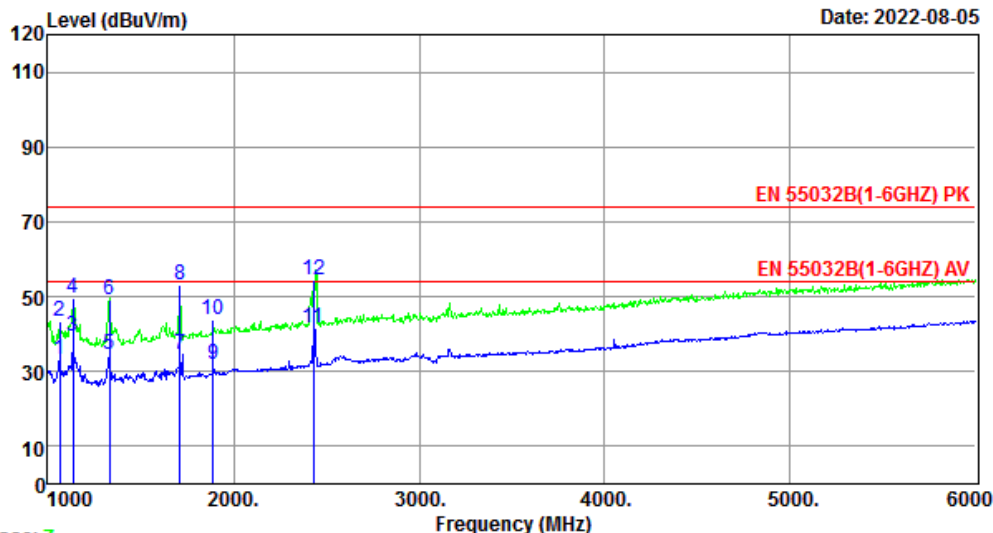


Trace: 7

Site no. : 1# 966 Chamber Data no. : 8
 Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
 Limit : EN 55032B(1-6GHZ) PK
 Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
 Engineer : MRS
 EUT : LCD MONITOR
 Power : AC 230V/50Hz
 M/N : E758
 Test Mode : VGA Mode(1920*1080)

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1065.00	24.17	2.20	6.79	33.16	54.00	20.84	Average
2	1065.00	24.17	2.20	17.25	43.62	74.00	30.38	Peak
3	1135.00	24.23	2.24	13.02	39.49	54.00	14.51	Average
4	1135.00	24.23	2.24	23.21	49.68	74.00	24.32	Peak
5	1330.00	24.36	2.35	7.90	34.61	54.00	19.39	Average
6	1330.00	24.36	2.35	22.50	49.21	74.00	24.79	Peak
7	1710.00	25.38	2.57	6.80	34.75	54.00	19.25	Average
8	1710.00	25.38	2.57	25.05	53.00	74.00	21.00	Peak
9	1890.00	26.08	2.67	2.96	31.71	54.00	22.29	Average
10	1890.00	26.08	2.67	15.12	43.87	74.00	30.13	Peak
11	2430.00	27.33	3.14	11.21	41.68	54.00	12.32	Average
12	2430.00	27.33	3.14	24.13	54.60	74.00	19.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

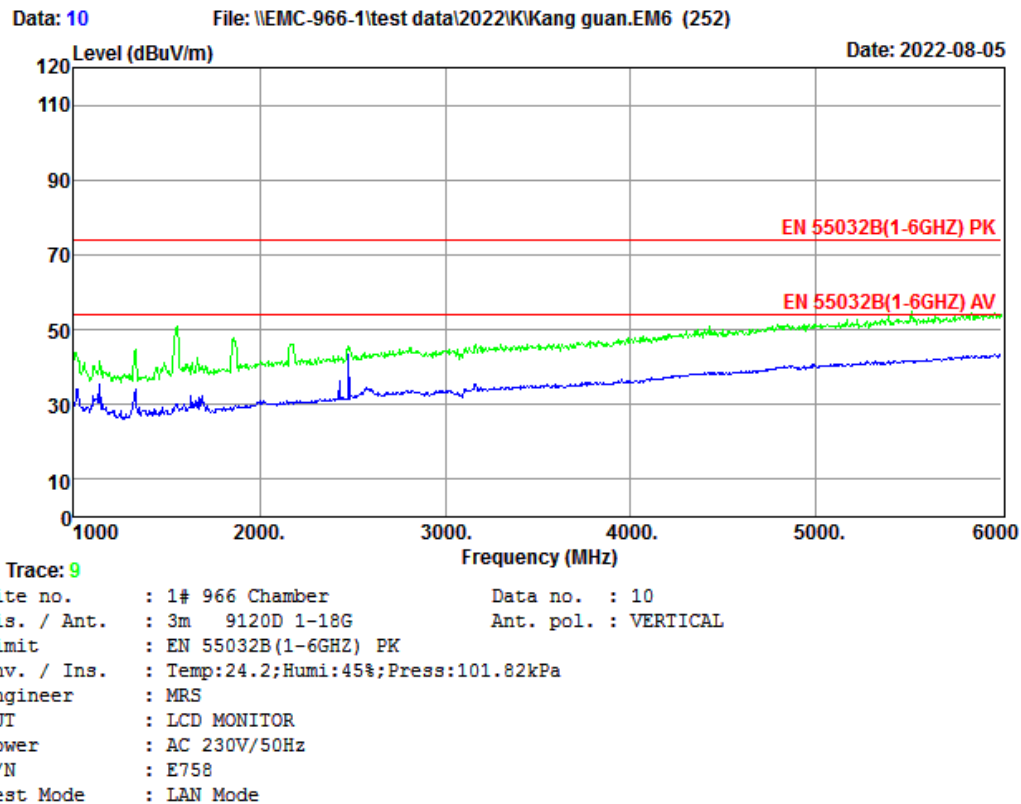

Data: 12


File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)


Date: 2022-08-05

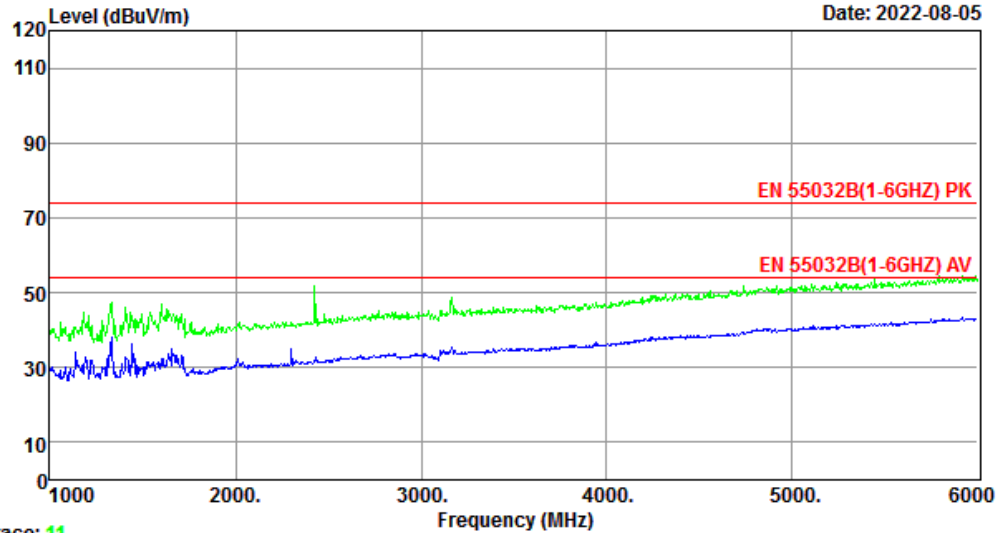


Trace: 11

Site no. : 1# 966 Chamber Data no. : 12
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : LAN Mode

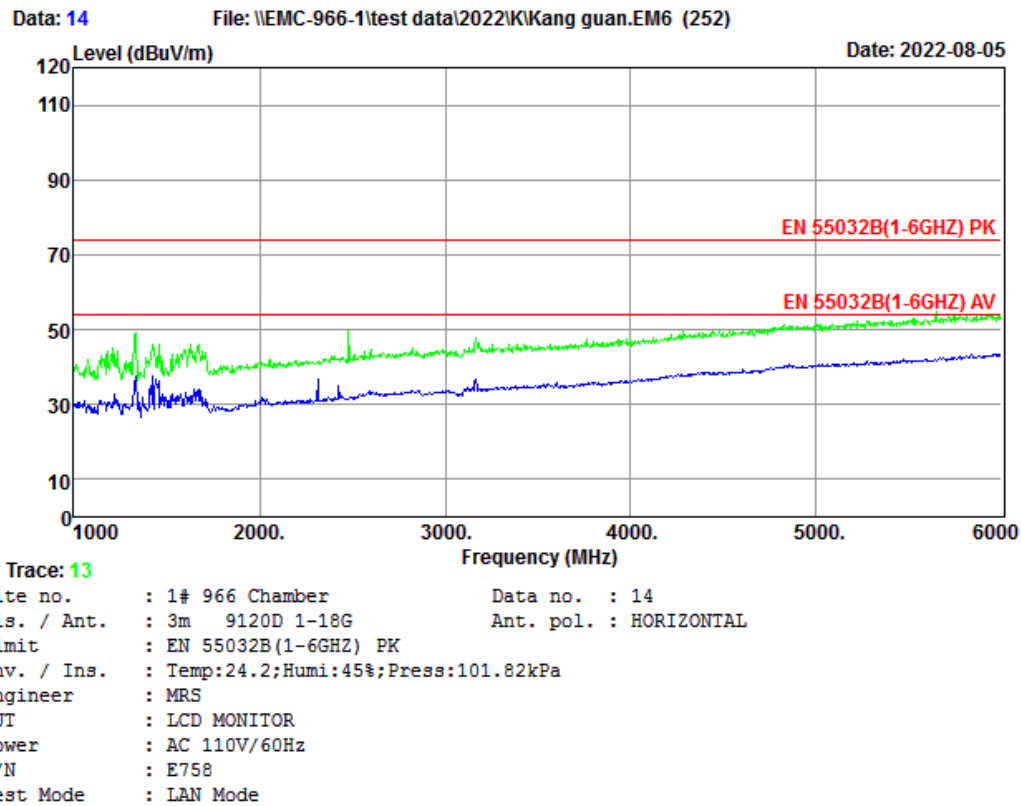

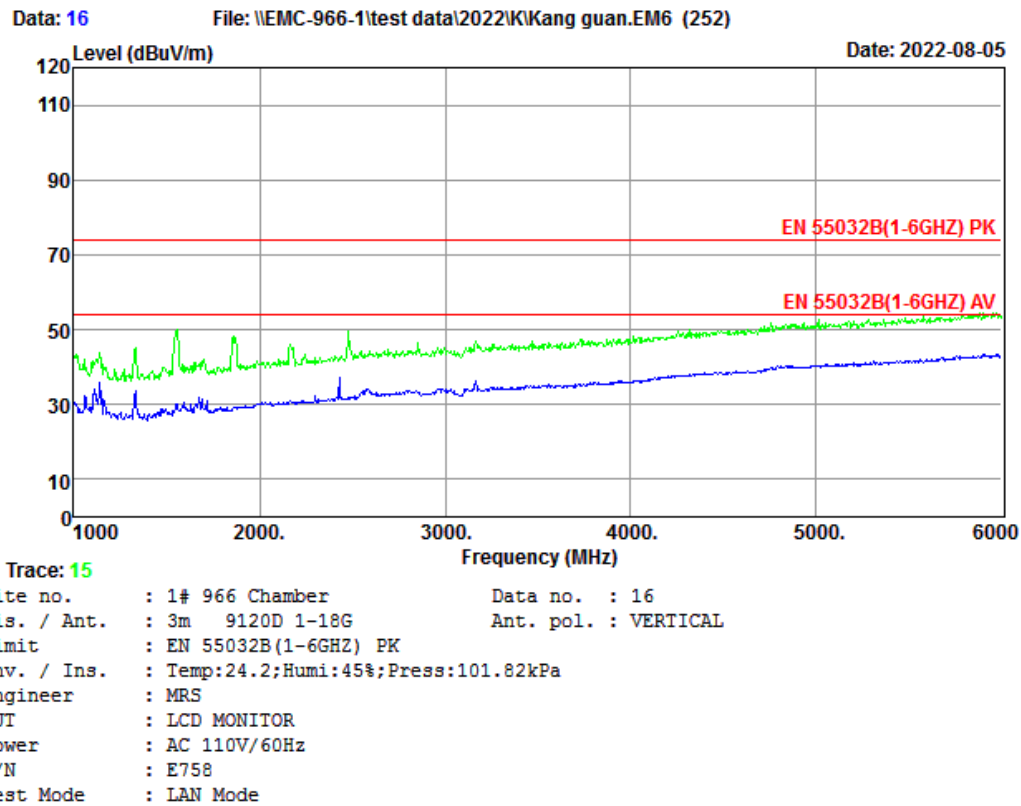


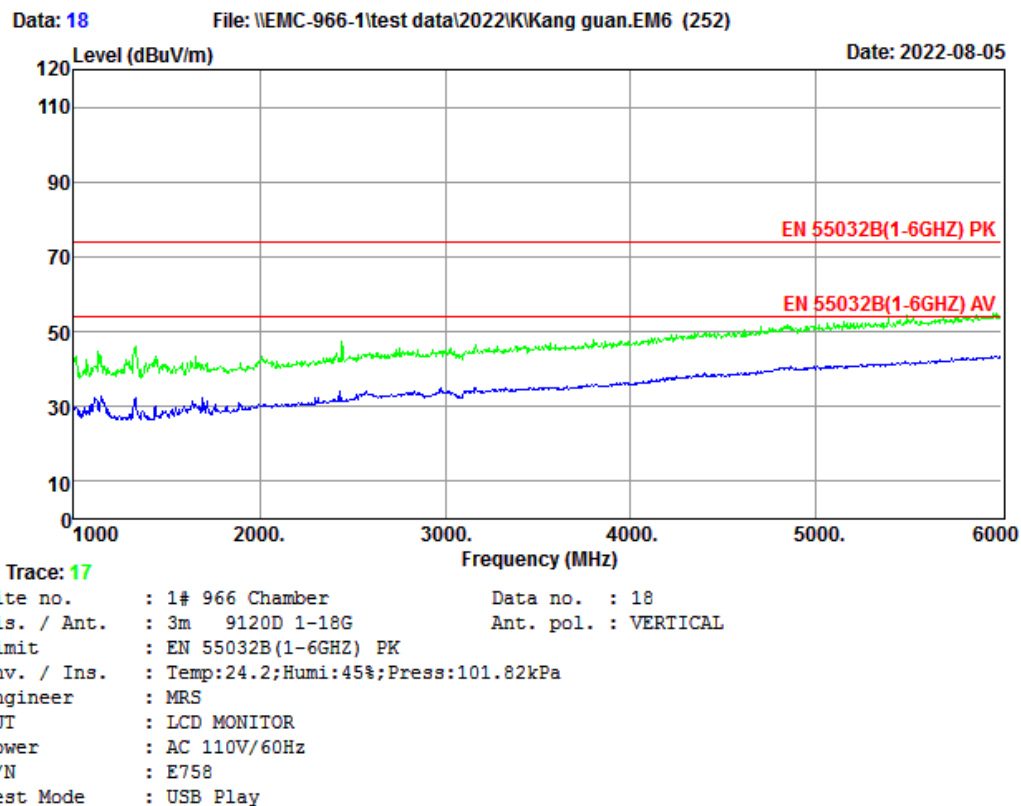

Data: 20

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

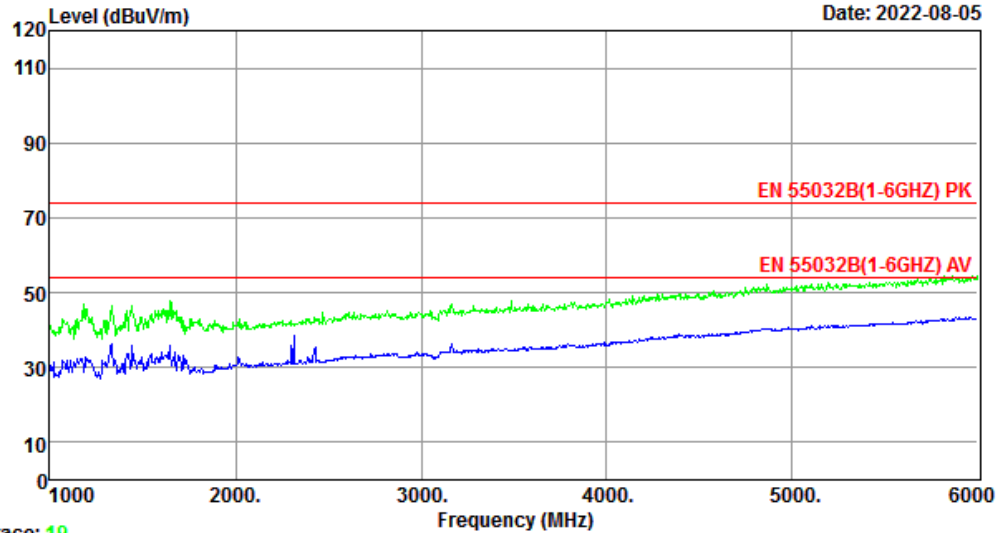


Trace: 19

Site no. : 1# 966 Chamber Data no. : 20
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : USB Play

Data: 22

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

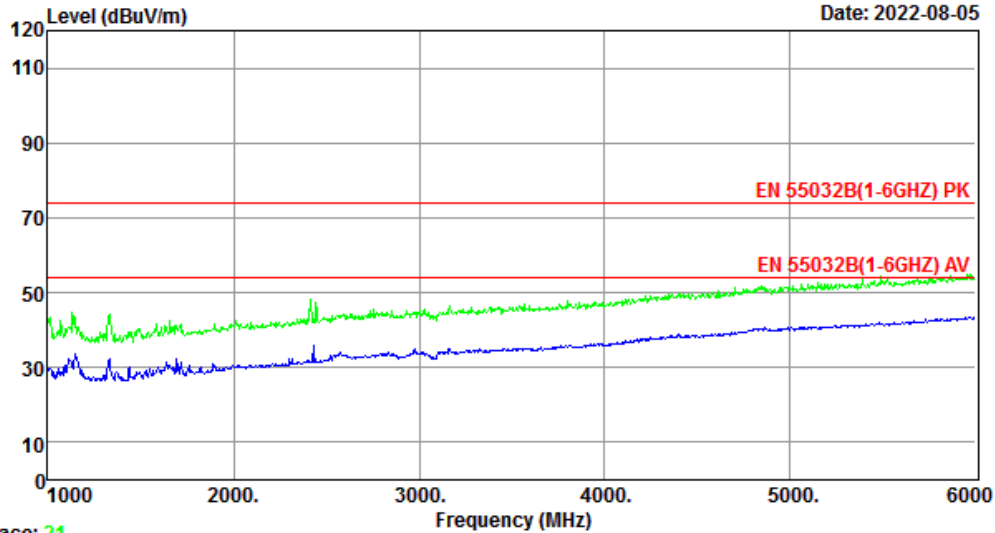


Trace: 21

Site no. : 1# 966 Chamber Data no. : 22
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : USB Play

Data: 24


File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

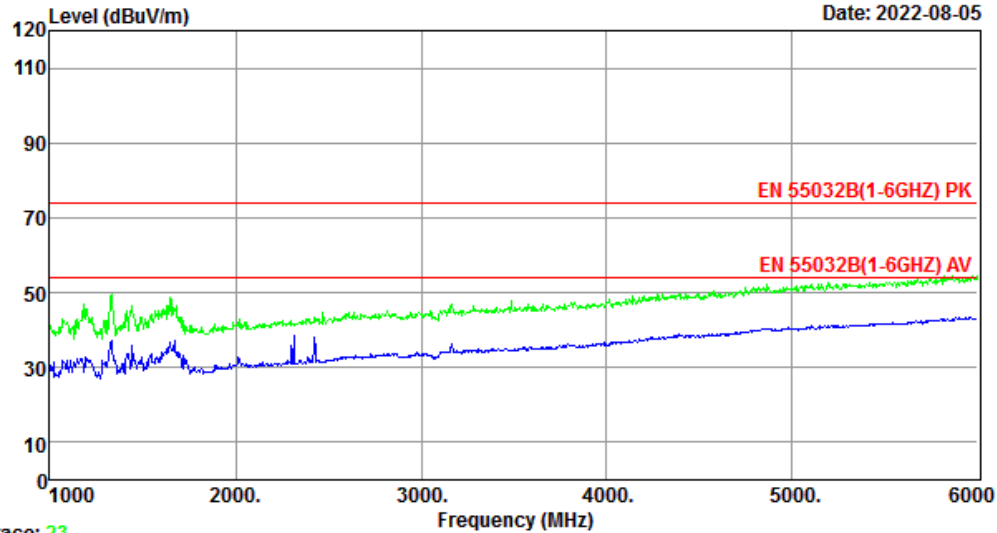

Trace: 23


Site no. : 1# 966 Chamber Data no. : 24
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : USB Play

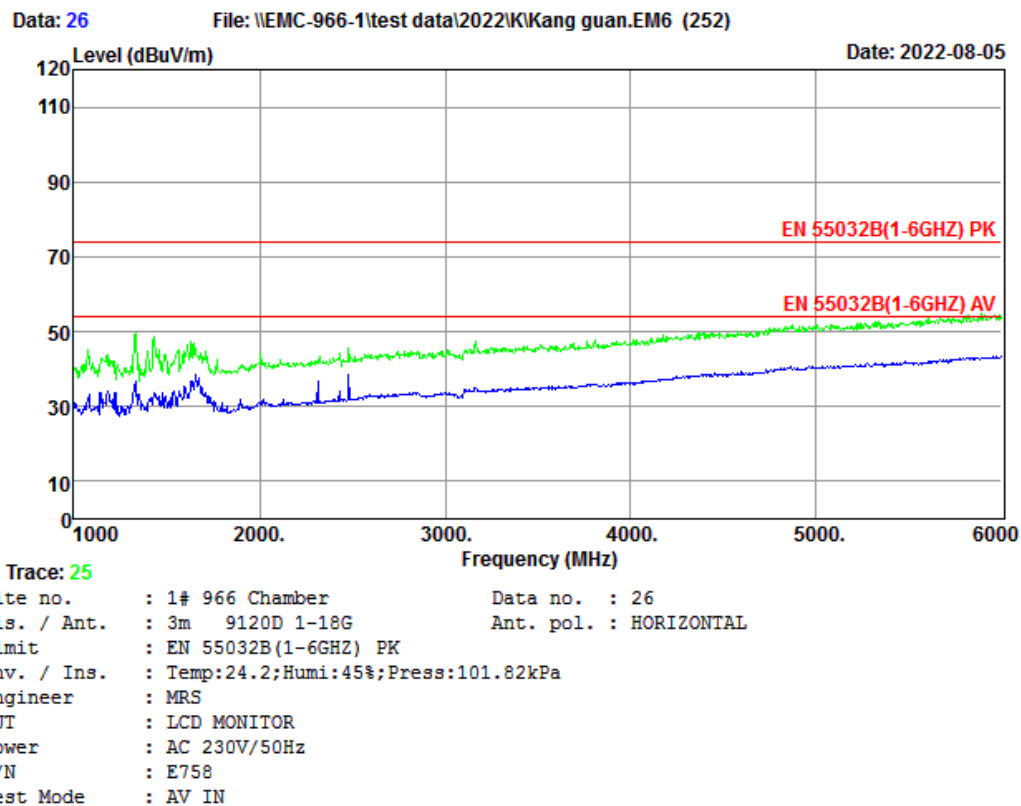

Data: 28


File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

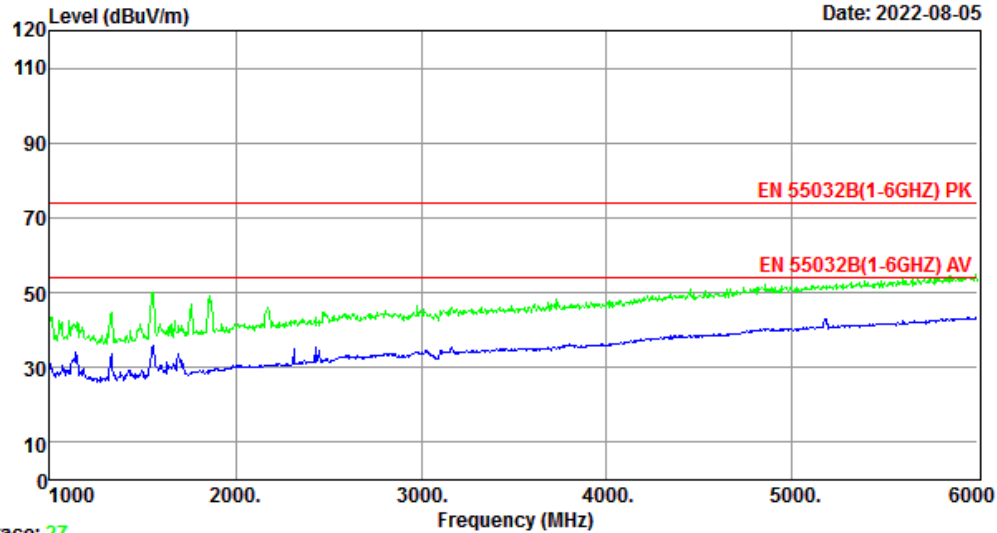

Trace: 27


Site no. : 1# 966 Chamber Data no. : 28
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : AV IN

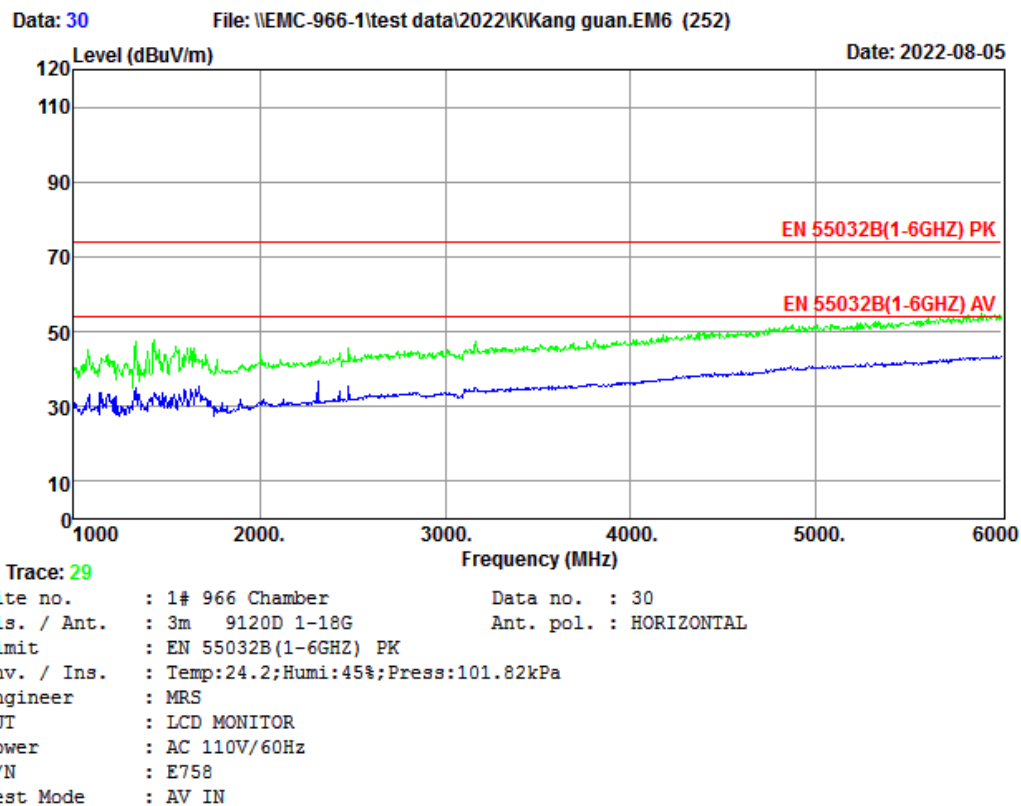

Data: 32

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

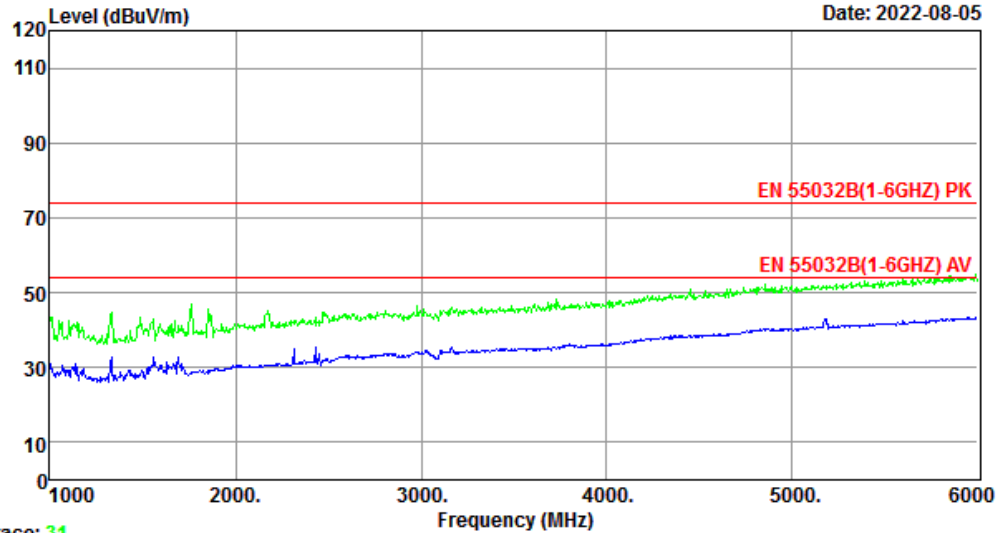


Trace: 31

Site no. : 1# 966 Chamber Data no. : 32
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : AV IN

Data: 34

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

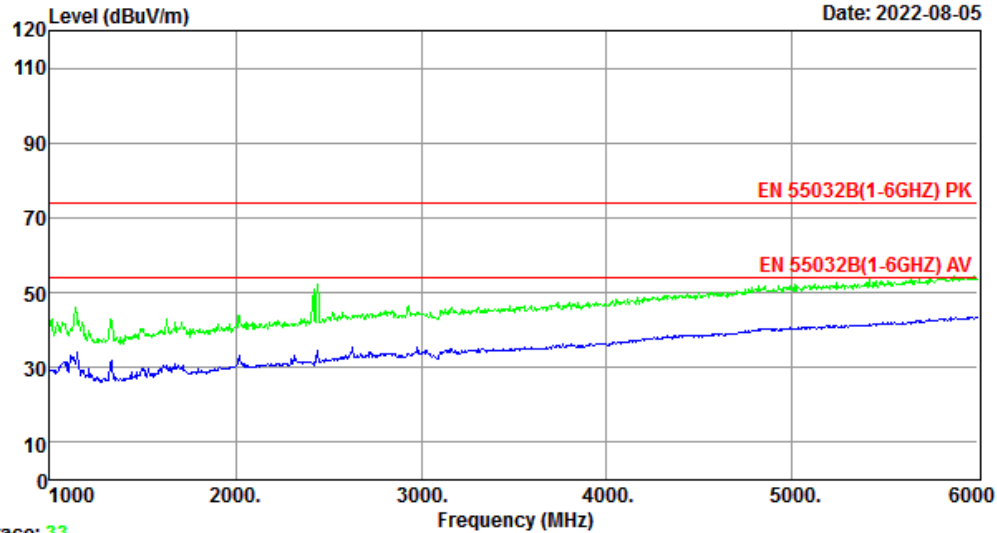


Trace: 33

Site no. : 1# 966 Chamber Data no. : 34
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI1 Mode(3840*2160)

Data: 36

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

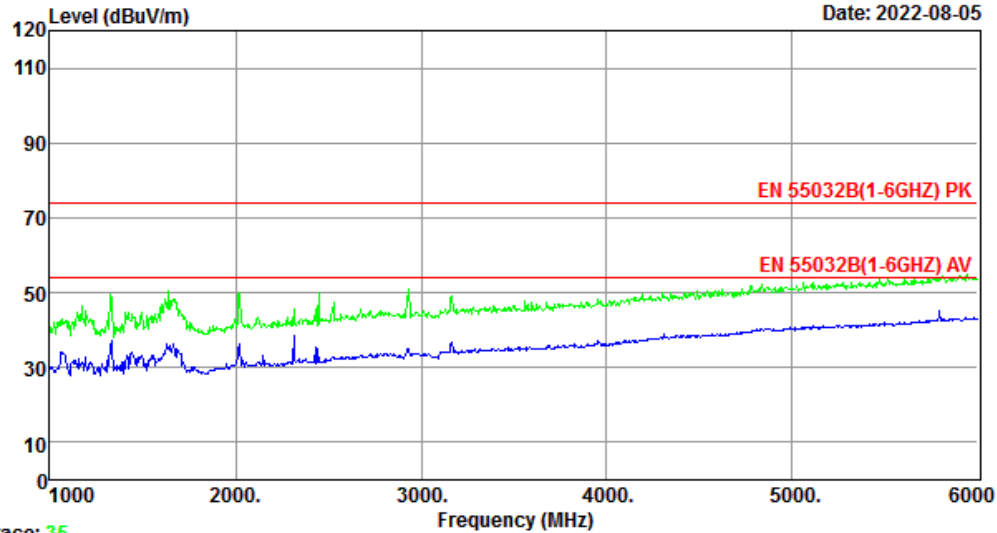


Trace: 35

Site no. : 1# 966 Chamber Data no. : 36
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI1 Mode(3840*2160)

Data: 38


File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

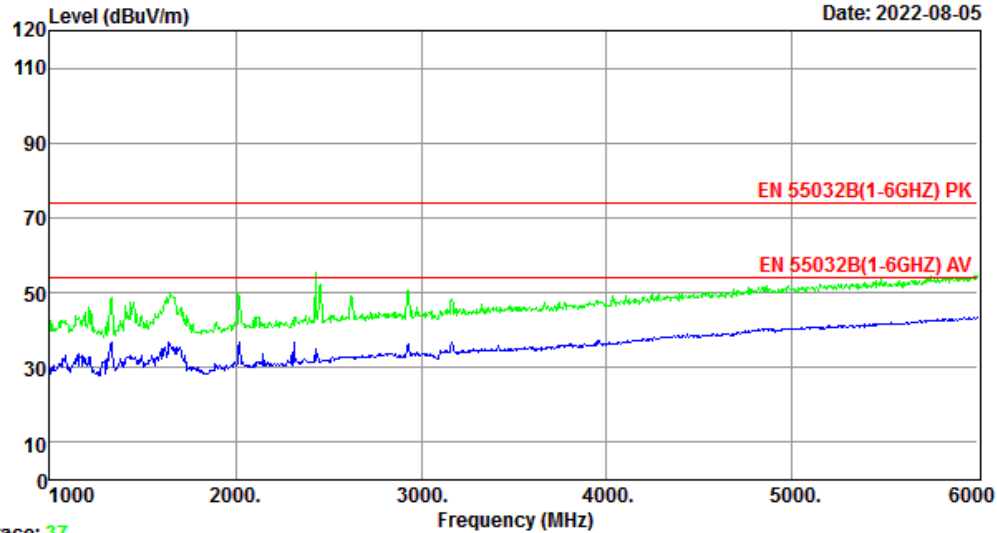

Trace: 37


Site no. : 1# 966 Chamber Data no. : 38
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI1 Mode(3840*2160)

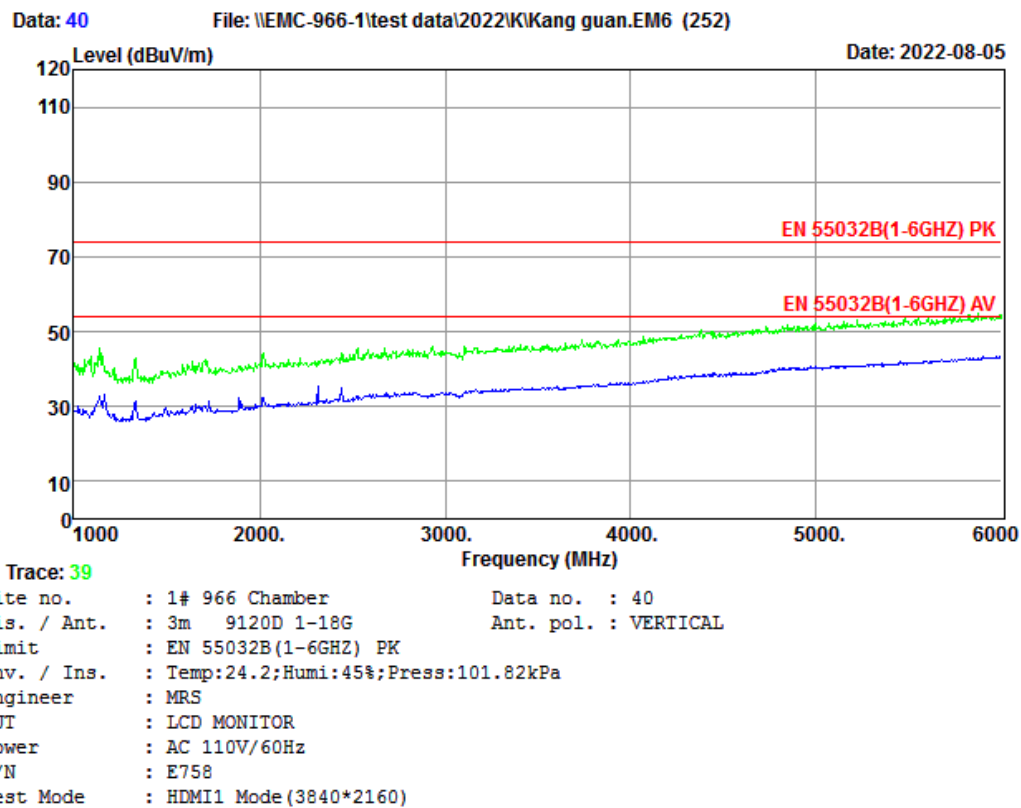

Data: 42

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

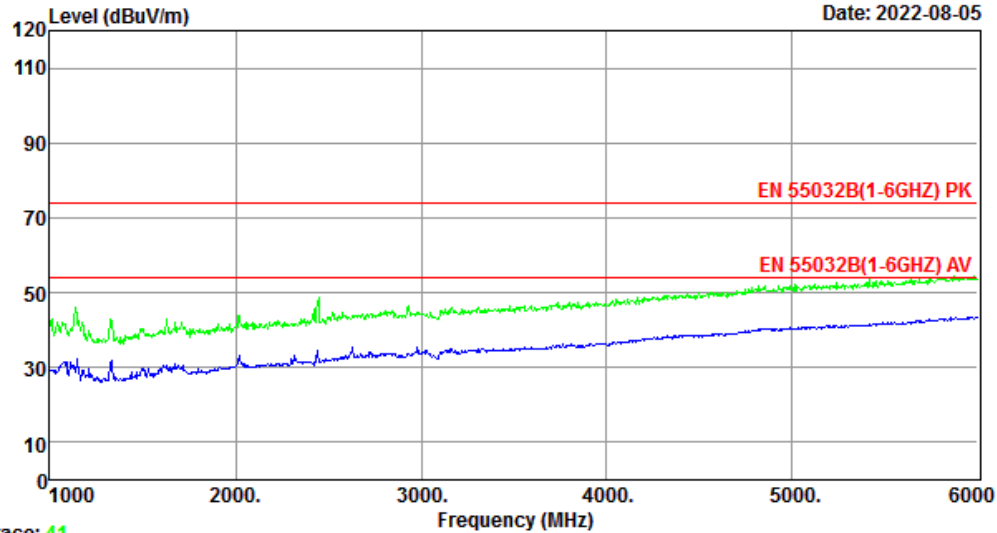


Trace: 41

Site no. : 1# 966 Chamber Data no. : 42
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 44

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

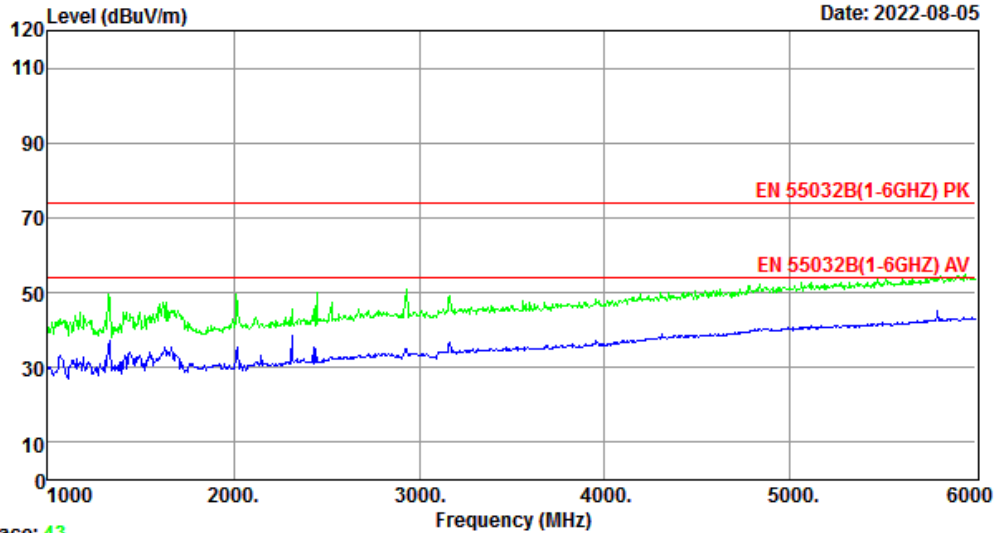


Trace: 43

Site no. : 1# 966 Chamber Data no. : 44
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 46

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

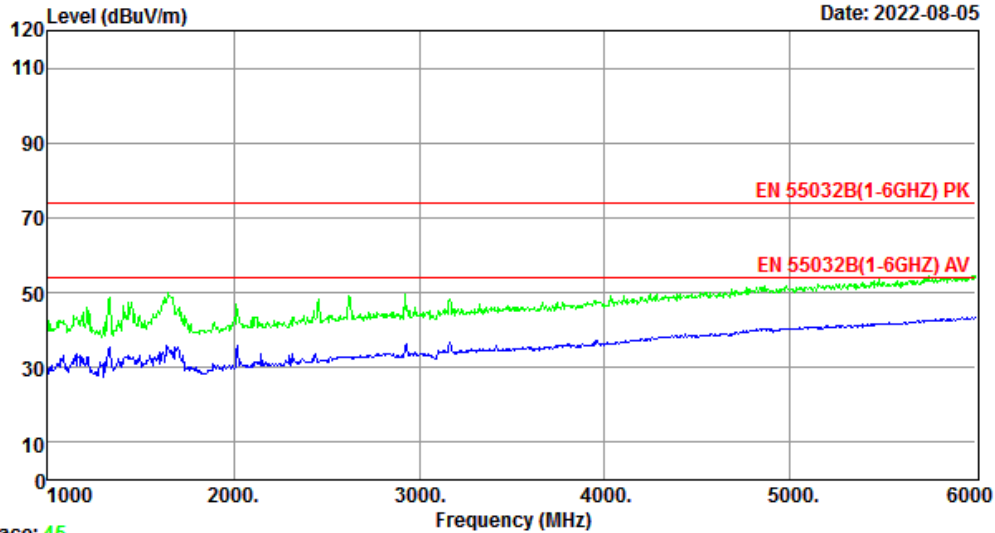


Trace: 45

Site no. : 1# 966 Chamber Data no. : 46
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

Data: 48


File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

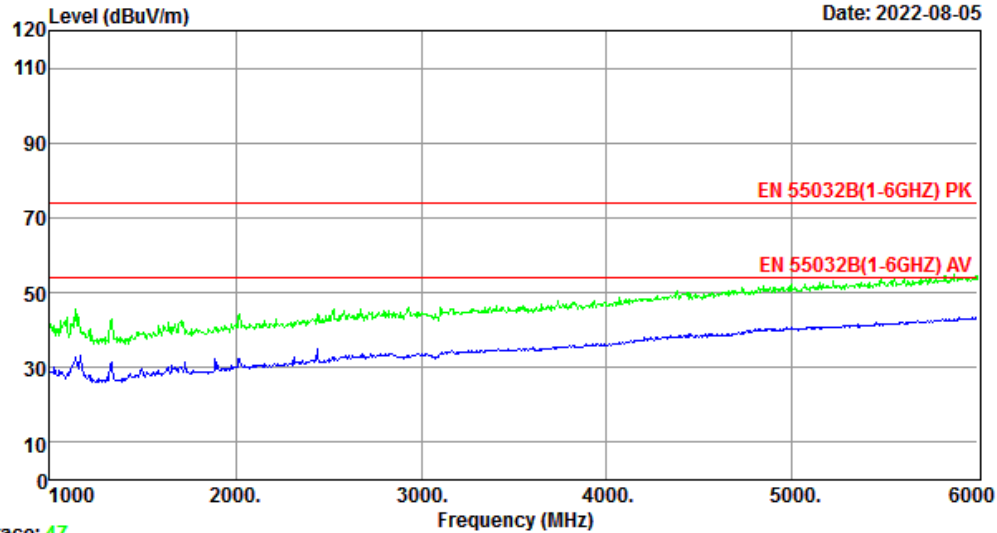

Trace: 47


Site no. : 1# 966 Chamber Data no. : 48
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI2 Mode(3840*2160)

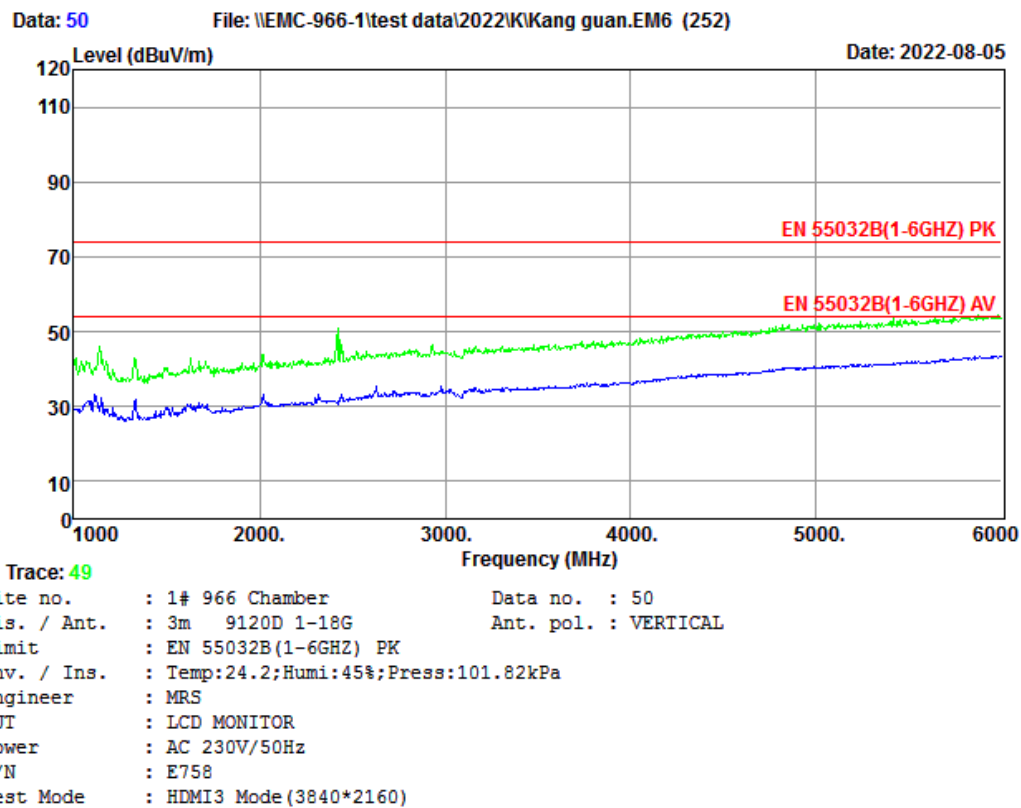

Data: 52

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

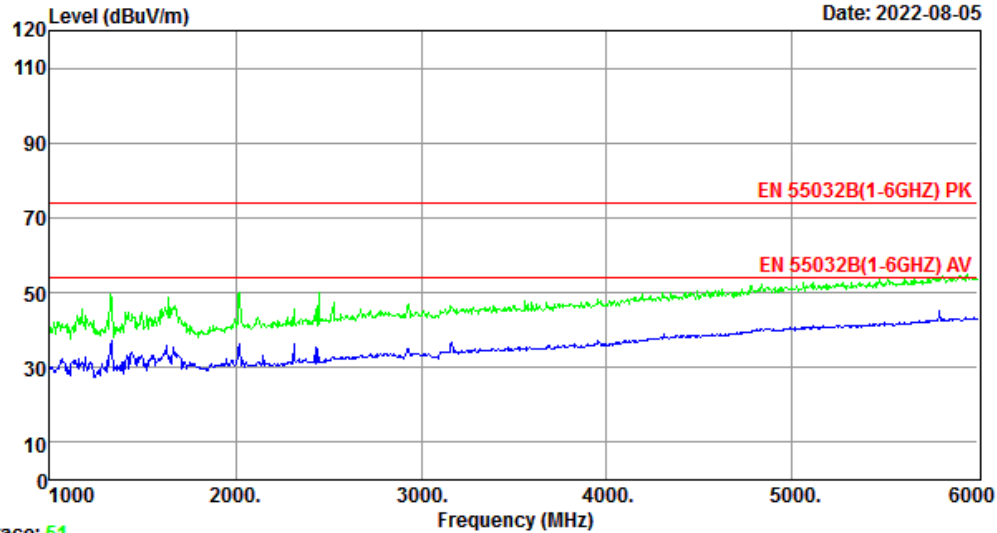


Trace: 51

Site no. : 1# 966 Chamber Data no. : 52
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 230V/50Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 54

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

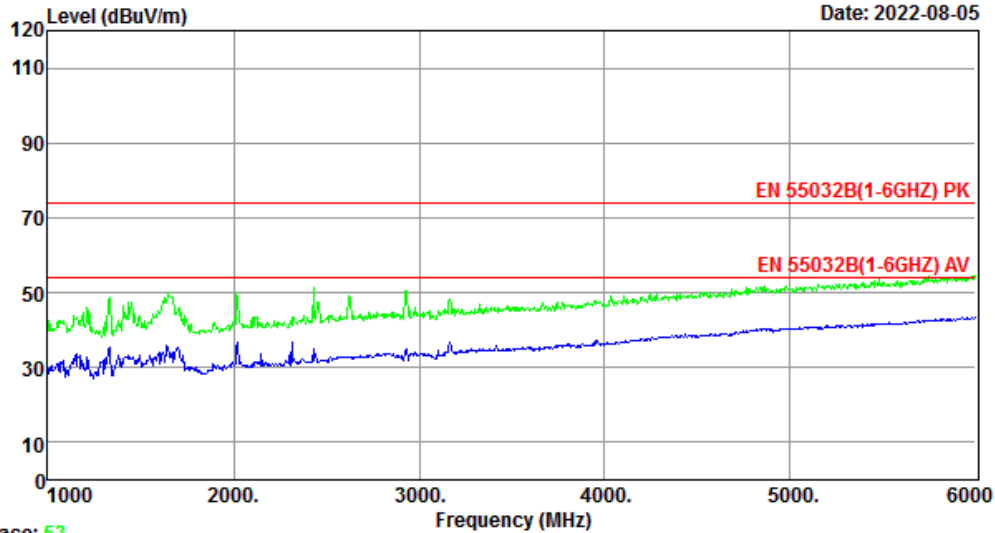


Trace: 53

Site no. : 1# 966 Chamber Data no. : 54
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : HORIZONTAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

Data: 56

File: \\EMC-966-1\\test data\\2022\\K\\Kang guan.EM6 (252)

Date: 2022-08-05

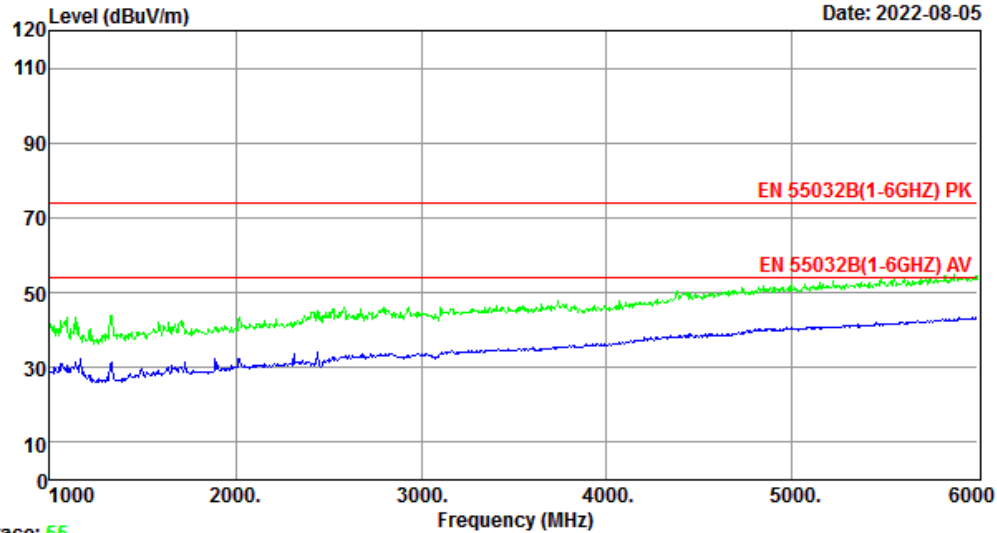


Trace: 55

Site no. : 1# 966 Chamber Data no. : 56
Dis. / Ant. : 3m 9120D 1-18G Ant. pol. : VERTICAL
Limit : EN 55032B(1-6GHZ) PK
Env. / Ins. : Temp:24.2;Humi:45%;Press:101.82kPa
Engineer : MRS
EUT : LCD MONITOR
Power : AC 110V/60Hz
M/N : E758
Test Mode : HDMI3 Mode(3840*2160)

4.5. Harmonic Current Emissions on AC Mains Test

RESULT : **Pass**
Test procedure : EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021
Measured harmonics : 1 ~ 40th
Limits : EN61000-3-2:2014; EN IEC 61000-3-2:2019+A1:2021

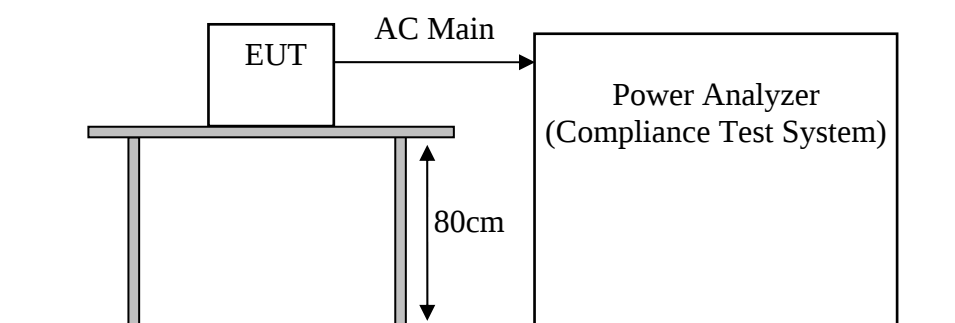

Test Data

Harmonics – Class-D per IEC 61000-3-2:2018/AMD1:2020(Run time)

EUT: LCD MONITOR M/N:E758

Test category: Class-D (European limits)

Test date: 2022/8/08

Start time: 15:54:13

Tested by: TANK

Test Margin: 100

End time: 15:56:54

Test duration (min): 2.5

Data file name: H-000437.cts_data


Comment: USB MODE (WORST CASE OPERATING MODE)

Customer: KANG GUAN

Test Result: Pass


Source qualification: Normal

Current & voltage waveforms

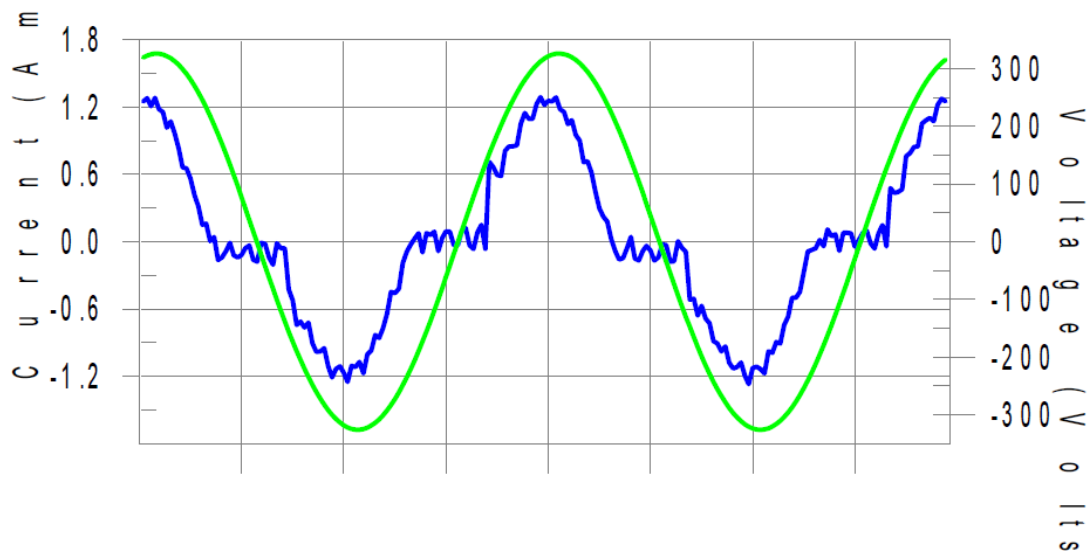

Harmonics and Class D limit line

European Limits

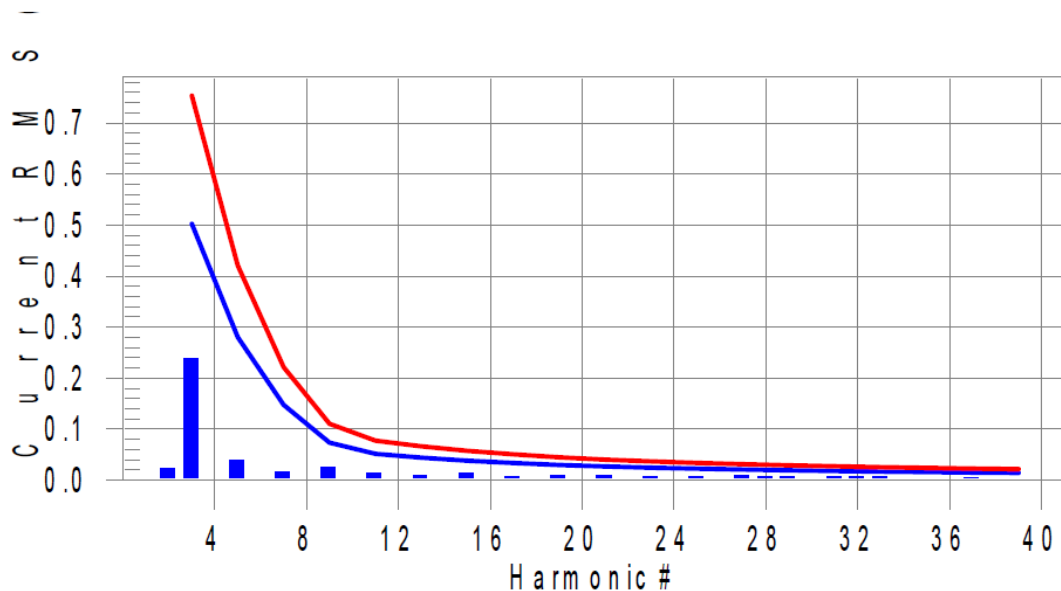

Test result: Pass Worst harmonics H31-39.2% of 150% limit, H3-47.4% of 100% limit

Current Test Result Summary (Run time)

EUT: LCD MONITOR M/N:E758 Tested by: TANK
 Test category: Class-D (European limits) Test Margin: 100
 Test date: 2022/8/08 Start time: 15:54:13 End time: 15:56:54
 Test duration (min): 2.5 Data file name: H-000437.cts_data
 Comment: USB MODE (WORST CASE OPERATING MODE)
 Customer: KANG GUAN

Test Result: Pass Source qualification: Normal
 THCA: 0.247 I-THD(%): 37.2 POHC(A): 0.023 POHC Limit(A): 0.063
 Highest parameter values during test:

V _{RMS} (Volts): 230.73	Frequency(Hz): 50.00
I _{Peak} (Amps): 1.531	I _{RMS} (Amps): 0.712
I _{Fund} (Amps): 0.663	Crest Factor: 2.159
Power (Watts): 147.7	Power Factor: 0.903

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.024	0.000	N/A	0.029	0.000	N/A	Pass
3	0.238	0.502	47.4	0.239	0.753	31.7	Pass
4	0.005	0.000	N/A	0.006	0.000	N/A	Pass
5	0.039	0.281	13.8	0.039	0.421	9.4	Pass
6	0.001	0.000	N/A	0.002	0.000	N/A	Pass
7	0.015	0.148	10.5	0.016	0.222	7.3	Pass
8	0.001	0.000	N/A	0.001	0.000	N/A	Pass
9	0.027	0.074	36.2	0.027	0.111	24.6	Pass
10	0.001	0.000	N/A	0.001	0.000	N/A	Pass
11	0.014	0.052	26.3	0.014	0.078	18.2	Pass
12	0.001	0.000	N/A	0.001	0.000	N/A	Pass
13	0.010	0.044	23.5	0.011	0.066	16.5	Pass
14	0.001	0.000	N/A	0.001	0.000	N/A	Pass
15	0.014	0.038	35.9	0.014	0.058	24.7	Pass
16	0.001	0.000	N/A	0.001	0.000	N/A	Pass
17	0.008	0.034	23.0	0.008	0.051	16.5	Pass
18	0.001	0.000	N/A	0.001	0.000	N/A	Pass
19	0.009	0.030	30.1	0.010	0.045	21.2	Pass
20	0.001	0.000	N/A	0.001	0.000	N/A	Pass
21	0.009	0.027	33.8	0.010	0.041	24.0	Pass
22	0.000	0.000	N/A	0.001	0.000	N/A	Pass
23	0.006	0.025	25.2	0.007	0.037	18.7	Pass
24	0.001	0.000	N/A	0.001	0.000	N/A	Pass
25	0.007	0.023	31.4	0.008	0.034	23.3	Pass
26	0.002	0.000	N/A	0.002	0.000	N/A	Pass
27	0.008	0.021	40.1	0.011	0.032	34.0	Pass
28	0.008	0.000	N/A	0.008	0.000	N/A	Pass
29	0.008	0.020	42.5	0.010	0.029	35.1	Pass
30	0.002	0.000	N/A	0.003	0.000	N/A	Pass
31	0.008	0.018	41.9	0.011	0.027	39.2	Pass
32	0.007	0.000	N/A	0.008	0.000	N/A	Pass
33	0.006	0.017	37.1	0.008	0.026	31.3	Pass
34	0.002	0.000	N/A	0.002	0.000	N/A	Pass
35	0.005	0.016	N/A	0.006	0.024	N/A	Pass
36	0.001	0.000	N/A	0.001	0.000	N/A	Pass
37	0.005	0.015	35.3	0.006	0.023	26.3	Pass
38	0.000	0.000	N/A	0.001	0.000	N/A	Pass
39	0.004	0.015	N/A	0.005	0.022	N/A	Pass
40	0.001	0.000	N/A	0.001	0.000	N/A	Pass

Note: Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

Voltage Source Verification Data (Run time)

EUT: LCD MONITOR M/N:E758
Test category: Class-D (European limits)
Test date: 2022/8/08
Test duration (min): 2.5
Comment: USB MODE (WORST CASE OPERATING MODE)
Customer: KANG GUAN

Tested by: TANK
Test Margin: 100
Start time: 15:54:13
End time: 15:56:54
Data file name: H-000437.cts_data

Test Result: Pass Source qualification: Normal


Highest parameter values during test:

Voltage (Vrms):	230.73	Frequency(Hz):	50.00
I_Peak (Amps):	1.531	I_RMS (Amps):	0.712
I_Fund (Amps):	0.663	Crest Factor:	2.159
Power (Watts):	147.7	Power Factor:	0.903

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.063	0.461	13.67	OK
3	0.388	2.076	18.70	OK
4	0.036	0.461	7.87	OK
5	0.034	0.923	3.70	OK
6	0.013	0.461	2.76	OK
7	0.025	0.692	3.55	OK
8	0.020	0.461	4.25	OK
9	0.022	0.461	4.66	OK
10	0.018	0.461	3.83	OK
11	0.008	0.231	3.41	OK
12	0.012	0.231	5.30	OK
13	0.011	0.231	4.77	OK
14	0.007	0.231	2.93	OK
15	0.018	0.231	7.79	OK
16	0.013	0.231	5.57	OK
17	0.013	0.231	5.63	OK
18	0.010	0.231	4.36	OK
19	0.013	0.231	5.81	OK
20	0.012	0.231	5.23	OK
21	0.013	0.231	5.81	OK
22	0.006	0.231	2.54	OK
23	0.007	0.231	3.24	OK
24	0.004	0.231	1.86	OK
25	0.010	0.231	4.19	OK
26	0.004	0.231	1.89	OK
27	0.012	0.231	5.35	OK
28	0.005	0.231	2.06	OK
29	0.007	0.231	3.14	OK
30	0.004	0.231	1.73	OK
31	0.009	0.231	4.00	OK
32	0.004	0.231	1.58	OK
33	0.008	0.231	3.61	OK
34	0.003	0.231	1.37	OK
35	0.008	0.231	3.55	OK
36	0.003	0.231	1.35	OK
37	0.011	0.231	4.91	OK
38	0.003	0.231	1.29	OK
39	0.006	0.231	2.64	OK
40	0.008	0.231	3.45	OK

4.6. Voltage Fluctuations and Flicker on AC Mains Test

RESULT : **Pass**(Please refer to the following page)
Test procedure : EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021
Limits : EN 61000-3-3:2013; EN 61000-3-3:2013+A1:2019+A2:2021

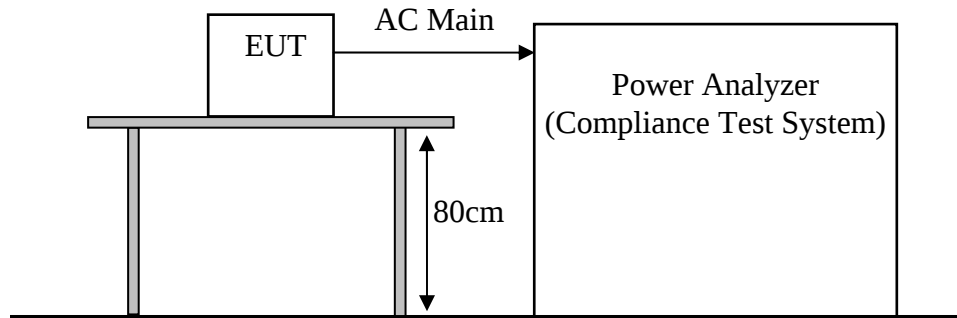

Test Data

Flicker Test Summary per IEC61000-3-3:2013/AMD1:2017 (Run time)

EUT: LCD MONITOR M/N:E758

Tested by: TANK

Test category: All parameters (European limits)

Test Margin: 100

Test date: 2022/8/08

Start time: 15:57:59

End time: 16:08:26

Test duration (min): 10

Data file name: F-000438.cts_data

Comment: USB MODE (Worst Case Operating Mode)


Customer: KANG GUAN

Test Result: Pass

Status: Test Completed

Pst_i and limit line

European Limits

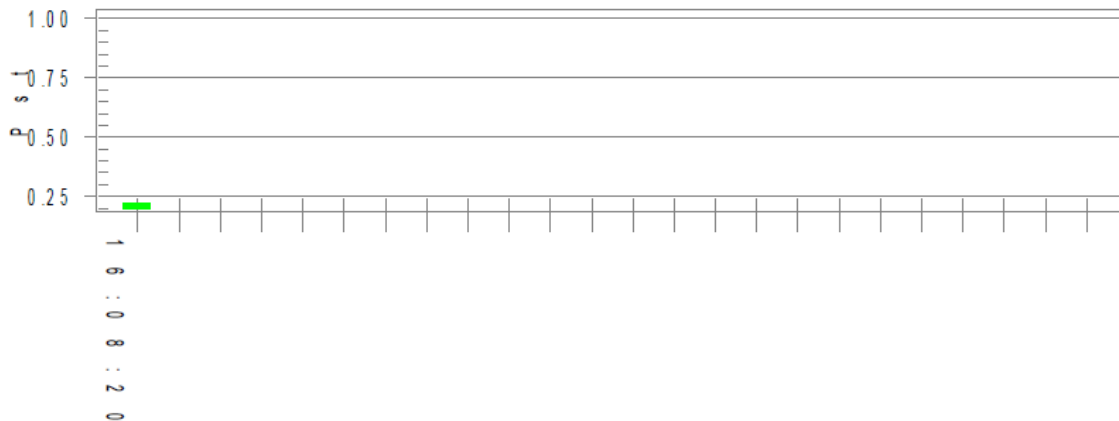

Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.71

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.224

Highest Plt (2 hr. period): 0.098

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

5. IMMUNITY TEST RESULT

5.1. Description of Performance Criteria:

Performance criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

For audio output device: The measured acoustic interference ratio and/or the measured electrical interference during the test shall be -20dB or better(see note1)

Performance criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Note 1: This performance criterion only using for Continuous inducted RF disturbances and Continuous RF electromagnetic field disturbances item.

5.2. Electrostatic Discharge Immunity Test

RESULT	: Pass
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-2:2009
Test specification	: +/-4.0kV(Contact discharge) +/-8.0kV(Air discharge)
Number of discharges	: ≥ 10 (Air discharge for single polarity discharge) ≥ 10 (Contact discharge for single polarity discharge)
Polarity	: Positive/Negative
Performance criterion	: B

Test Setup

Date of test	: Aug. 08, 2022
Model No.	: E758
Input Voltage	: AC 230V/50Hz, AC 110V/60Hz
Operation Mode	: HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160), HDMI 3 Mode (3840*2160), VGA Mode (1920*1080), USB Play, AV IN, LAN Mode
Temperature	: 25.1°C
Humidity	: 51.2%
Pressure	: 101.10kPa

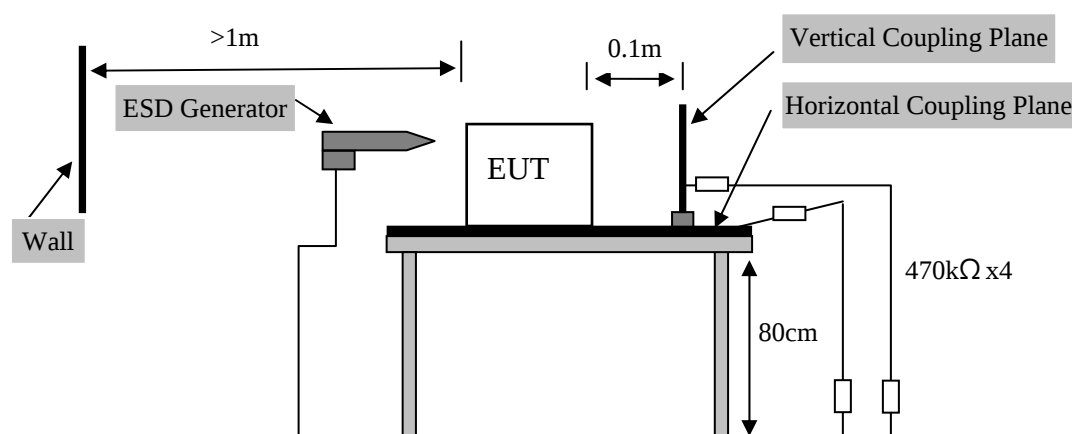


Table 1: Electrostatic Discharge Immunity Test Result

Discharge Location		Type of discharge	Result
HCP	4 points	Contact	Pass
VCP	4 points	Contact	Pass
Crust	2 points	Contact	Pass
Screw	4 points	Contact	Pass
VGA	1 point	Contact	Pass
USB	1 point	Contact	Pass
HDMI	3 points	Contact	Pass
LAN	1 point	Contact	Pass
Type-C Port	1 point	Contact	Pass
Headphone	1 point	Air	Pass
AV IN	1 point	Air	Pass
SPDIF OUT	1 point	Air	Pass
AUDIO IN	1 point	Air	Pass
SCREW	4 points	Air	Pass
Slots	4 points	Air	Pass

*Remark: 1. The EUT was stopped during the test, but self-recoverable after the test.
2. Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

5.3. Radio Frequency Electromagnetic Field Immunity(R/S) Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-3:2006+A1:2008+A2:2010
Frequency Range : 80-1000MHz,1800MHz, 2600MHz, 3500MHz, 5000MHz
Performance criterion : A
Test site : 866 Chamber

Test Setup


Date of test : Aug. 08, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode
Temperature : 26°C
Humidity : 55%
Pressure : 101.10kPa

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The EUT was set 3 m away from the transmitting antenna which was mounted on an antenna tower. Both horizontal and vertical polarization of the antenna were set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera was used to monitor EUT screen.

All the scanning conditions were as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	at least 3 seconds

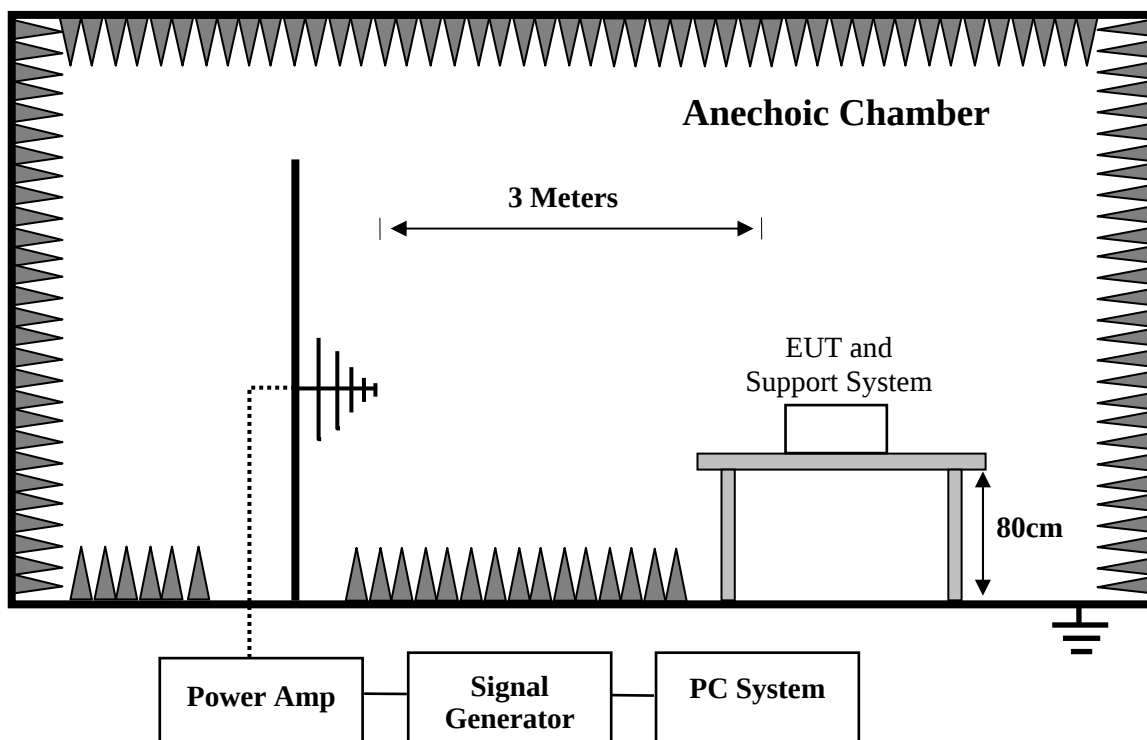

Condition of Test	Remarks
6. Field Strength	3 V/m (Severity Level 2)
7. Radiated Signal	Modulated
8. Scanning Frequency	1800MHz,2600MHz,3500MHz,5000MHz
9. Sweeping time of radiated	0.0015 decade/s
10. Dwell Time	at least 3 seconds

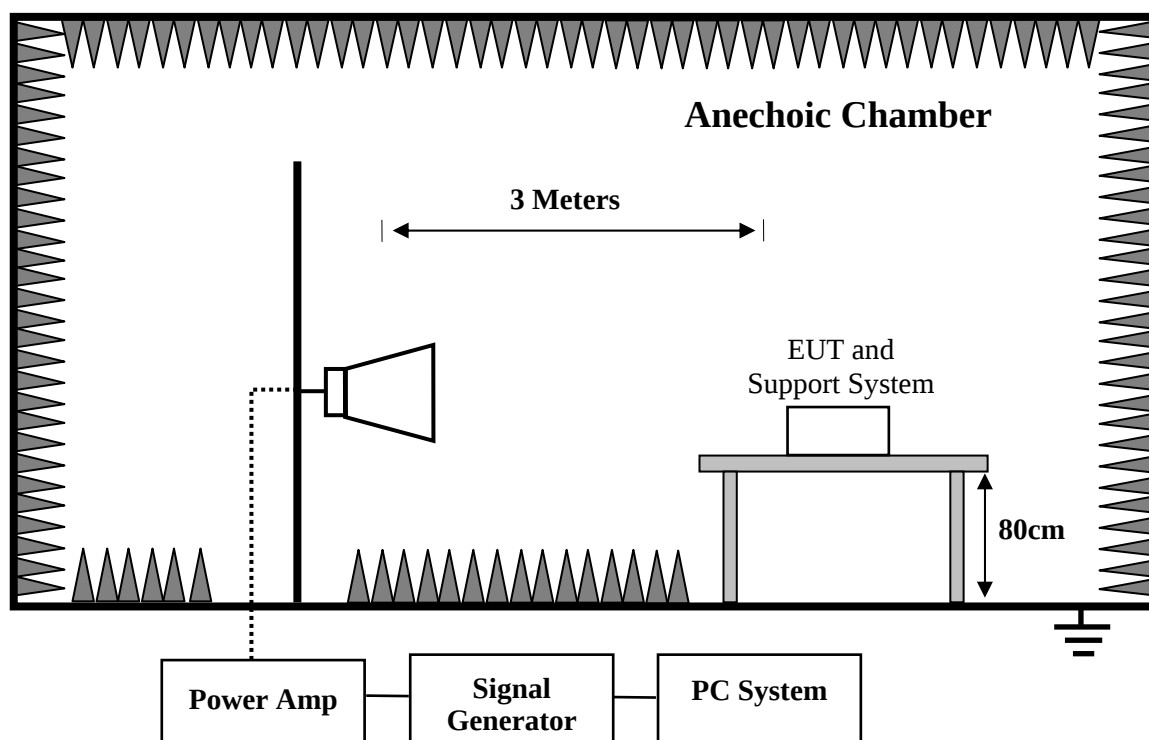


Table 2: Radio Frequency Electromagnetic Field Immunity Test Result

Field Strength (V/m)	Test Frequency (MHz)	Test mode (worst case)	Polarization of antenna	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	80-1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz	USB Play	H	75dBSPL	Speaker	$\leq$ -20dB	-34 dB
			V	75dBSPL	Speaker		-42 dB

RESULT	: Pass
Test procedure	: EN 55035:2017+A11:2020
Basic standard	: EN 61000-4-4:2012
Pulseform	: Tr/Th = 5/50ns
Repetition Frequency	: 5 kHz ; (100 kHz : only for single lines of xDSL equipment)
Test Duration	: 120s
Performance criterion	: B

Date of test	:	Aug. 08, 2022
Model No.	:	E758
Input Voltage	:	AC 230V/50Hz, AC 110V/60Hz
Operation Mode	:	HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160), HDMI 3 Mode (3840*2160), VGA Mode (1920*1080), USB Play, AV IN, LAN Mode
Temperature	:	23°C
Humidity	:	50%
Pressure	:	101.10kPa

1. For power input port:

The diagram illustrates the test setup for the EUT and EFT/B Tester. The EUT is placed on a 10cm wood block, which is supported by a ground reference plane. The distance between the wall and the EUT is greater than 0.5m. The EFT/B Tester is connected to the AC Mains (0.5 ± 0.05) and the EUT. The height of the ground reference plane is 80cm.

Table 3: Electrical Fast Transient/Burst Immunity Test Result

Coupling Ports		Coupling Voltage	Inject Method	Result
AC Power Ports	L	± 1 kV	Direct	Pass
	N	± 1 kV		Pass
	PE	± 1 kV		Pass
	L-N	± 1 kV		Pass
	L-PE	± 1 kV		Pass
	N-PE	± 1 kV		Pass
	L-N-PE	± 1 kV		Pass
Signal Line		± 0.5 kV	Capacitive clamp	Pass

Remark: The screen was flashing during the test, but self-recoverable after the test.

5.5. Surge Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-5:2014
Pulse form : $T_r/T_d = 1.2/50\mu s$
Test Duration : 60s
Performance criterion : B

Test Setup

Date of test : Aug. 08, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode
Temperature : 26°C
Humidity : 56%
Pressure : 101.1kPa

2 Ω effective output impedance of the generator was used for L-N test. 12 Ω effective output impedance of the generator was used for L-PE, N-PE test.

5 positive and 5 negative (polarity) tests were applied successively synchronized to the voltage phase, 90°, 270° to L-N respectively. The repetition rate was 1 per minute during test.

1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device which coupled the surge interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration was 1 minute.

2. For signal lines and control lines ports:

None.

3. For DC input and DC output power ports:

None.

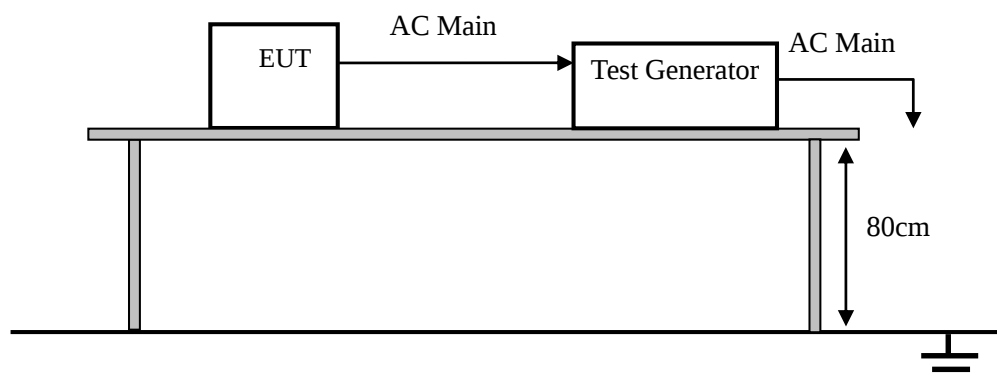


Table 4: Surge Immunity Test Result

Coupling Ports		Coupling Voltage	Coupling Phase / Result			
			0°	90°	180°	270°
AC power ports	L-N	+/-1kV Direct	/	Pass	/	Pass
	L-PE	+/-2kV Direct	/	Pass	/	Pass
	N-PE	+/-2kV Direct	/	Pass	/	Pass

Remark: The EUT was stopped during the test, but self-recoverable after the test.

5.6. Injected Currents Susceptibility Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-6:2014
Test specification : 3 Vr.m.s, 3 Vr.m.s - 1Vr.m.s, 1Vr.m.s,
AM 80%, 0.15 MHz - 10 MHz, 10 MHz – 30 MHz,
30 MHz – 80MHz
Performance criterion : A

Test Setup

Date of test : Aug. 08, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode
Temperature : 26°C
Humidity : 55%
Pressure : 101.1kPa

The EUT were placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) was placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT were as short as possible, and their height above the ground reference plane were between 30 and 50 mm (where possible).

The frequency range was swept from 0.15 MHz - 10 MHz, 10 MHz – 30 MHz and 30 MHz – 80MHz using 3V, 3 V - 1V, 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency was swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

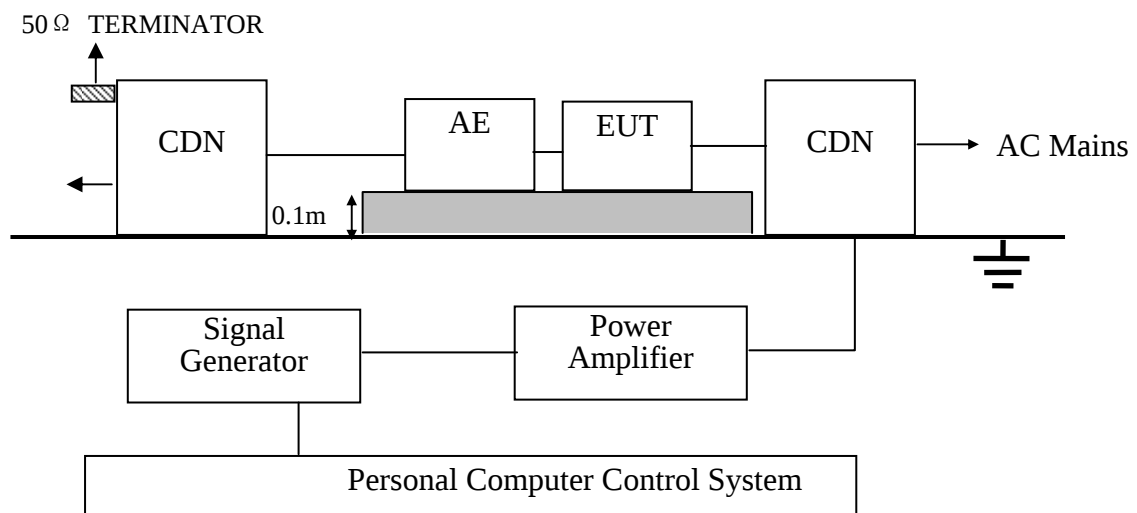


Table 5: Injected Currents Susceptibility Test Result

Voltage (V)	Test Frequency (MHz)	Test mode (worst case)	Injection Method	Reference Level	Audio output	Limit	Interference Ratio (worst case)
3	0.15 –10 MHz	USB Play	CDN-M3	75dBSPL	Speaker	$\leq$ -20dB	-43 dB
3 -1	10 –30 MHz						-46 dB
1	30 –80 MHz						-49 dB
3	0.15 –10 MHz	LAN Mode	EM Clamp	75dBSPL	Speaker	$\leq$ -20dB	-44 dB
3 -1	10 –30 MHz						-45dB
1	30 –80 MHz						-48dB

5.7. Power Frequency Magnetic Field Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017+A11:2020
Basic standard : EN 61000-4-8:2010
Test specification : 1 A/m
Performance criterion : A

Test Setup

Date of test : Aug. 08, 2022
Model No. : E758
Input Voltage : AC 230V/50Hz, AC 110V/60Hz
Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode
Temperature : 25°C
Humidity : 51%
Pressure : 101.10kPa

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m). The induction coil then was rotated by 90° in order to expose the EUT to the test field with different orientations.

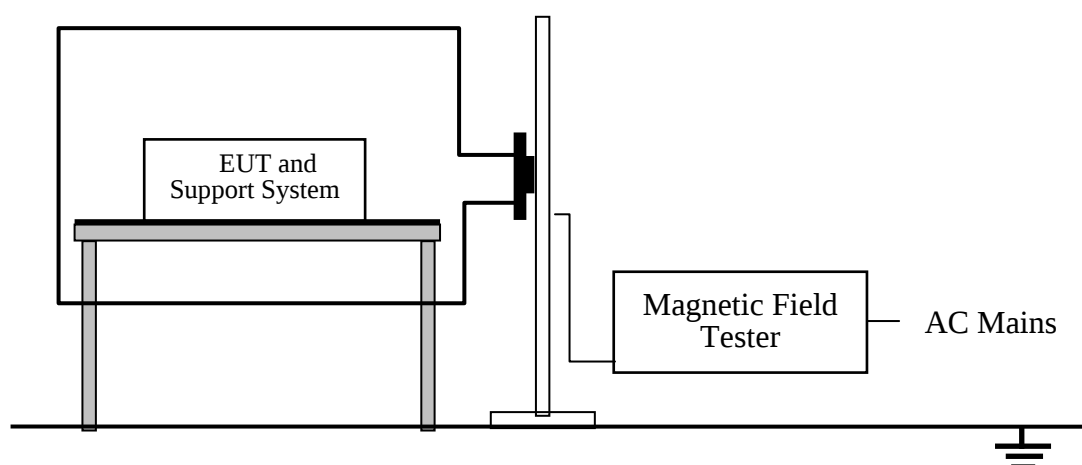


Table 6: Power Frequency Magnetic Field Immunity Test Result

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 mins	X	A	Pass
1A/m	5 mins	Y	A	Pass
1A/m	5 mins	Z	A	Pass

Remark: There was no change compared with initial operation during the test

5.8. Voltage Dips and Short Interruptions Immunity Test

RESULT : **Pass**

Test procedure : EN 55035:2017+A11:2020

Basic standard : EN 61000-4-11:2004

Test specification : 0%UT ; 0.5P, Criterion: B
70%UT; 25P/30P, Criterion: C
0%UT; 250P/300P, Criterion: C

Test Setup

Date of test : Aug. 08, 2022

Model No. : E758

Input Voltage : AC 230V/50Hz, AC 110V/60Hz

Operation Mode : HDMI 1 Mode (3840*2160), HDMI 2 Mode (3840*2160),
HDMI 3 Mode (3840*2160), VGA Mode (1920*1080),
USB Play, AV IN, LAN Mode

Temperature : 22°C

Humidity : 51%

Pressure : 101.0kPa

The interruptions was introduced at selected phase angles with specified duration.
Recorded any degradation of performance.

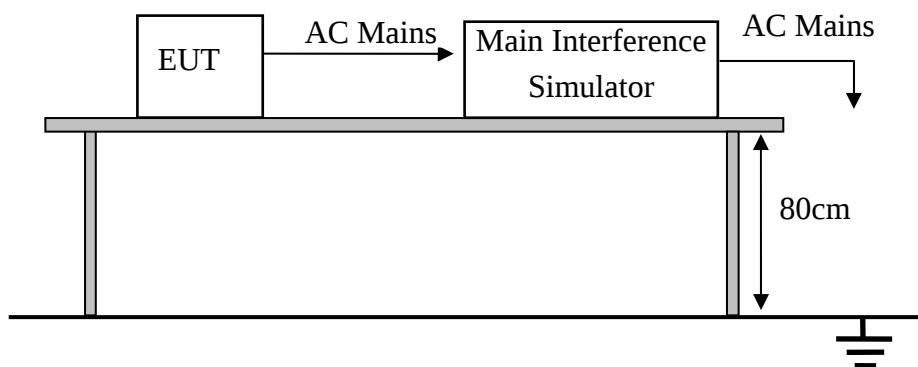


Table 7: Voltage Dips and Short Interruptions Immunity Test Result AC 230V/50Hz

Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in period)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Remark: The EUT was Stopped during the test, but self-recoverable after the test.

Table 8: Voltage Dips and Short Interruptions Immunity Test Result AC 110V/60Hz

Test Level % UT	Voltage Dips & Short Interruptions % UT	Duration (in period)	Criterion	Result
0	100	0.5P	B	PASS
70	30	30P	C	PASS
0	100	300P	C	PASS

Remark: The EUT was Stopped during the test, but self-recoverable after the test.

6. PHOTOGRAPHS OF TEST SET-UP



6.1.Set-up for Conducted Emission at the Mains Terminals Test




6.2.Set-up for Asymmetric Mode Conducted Emissions Test



6.3.Set-up for Radiated Emission Test(30MHz-1000MHz)

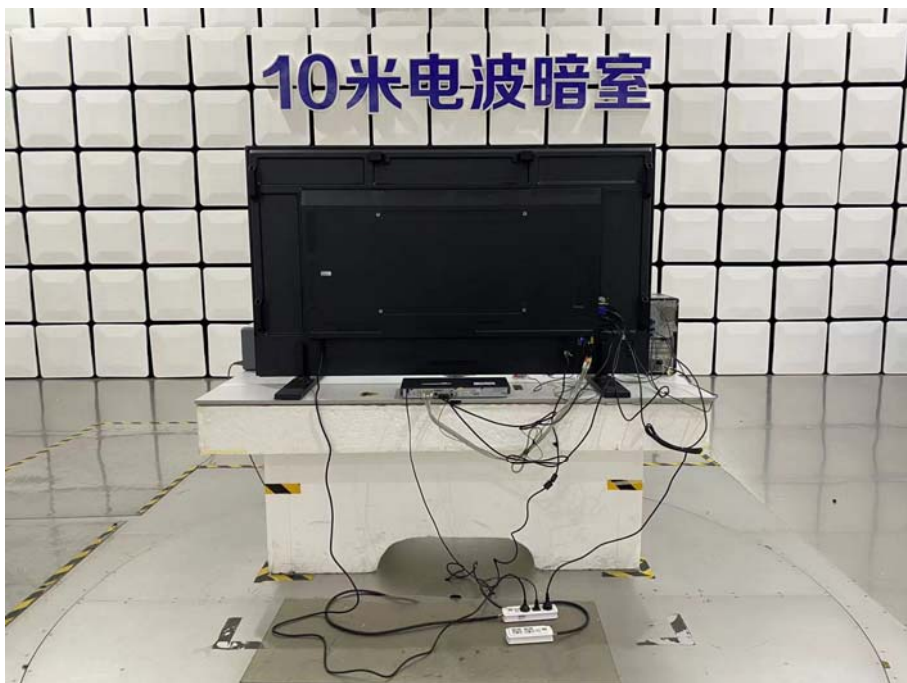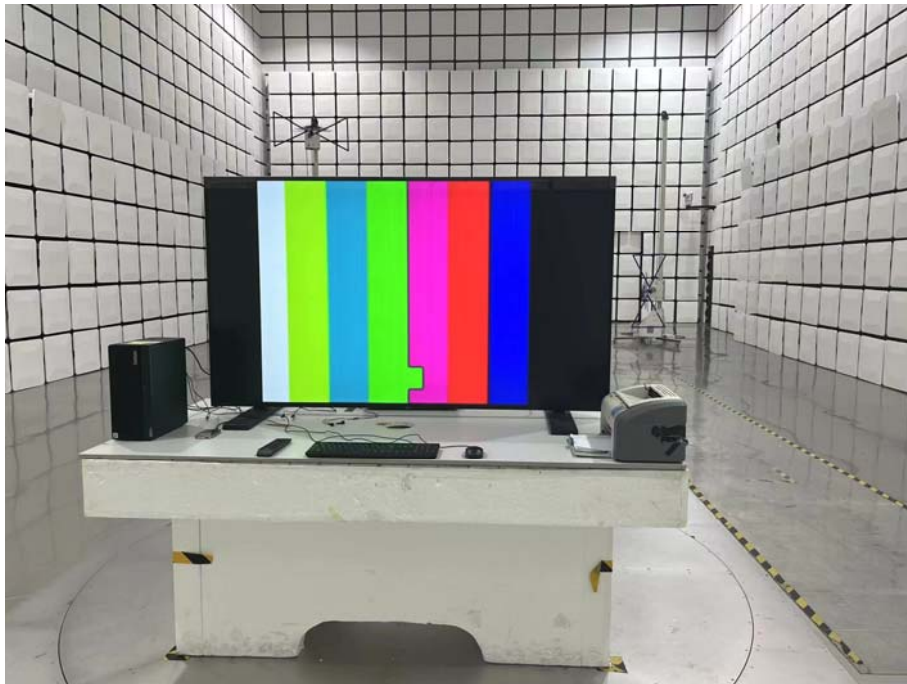

6.4.Set-up for Radiated Emission Test(above 1GHz)

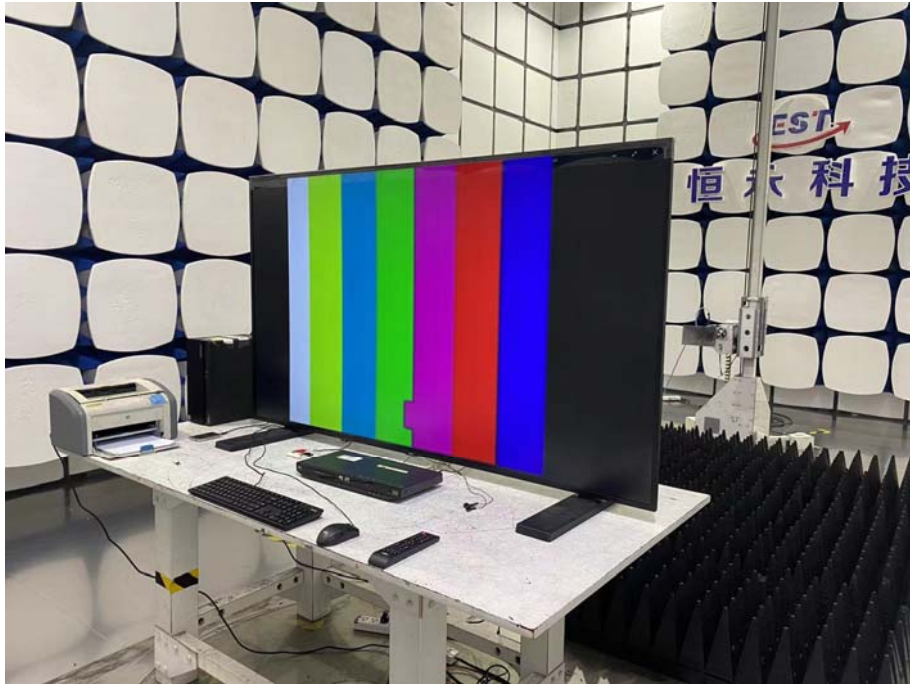

6.5.Set-up for Harmonic Current Emissions and Flicker on AC Mains Test




6.6.Set-up for Electrostatic Discharge Immunity Test



6.7.Set-up for Radio Frequency Electromagnetic Field Immunity(R/S) Test



6.8.Set-up for Surge Immunity Test

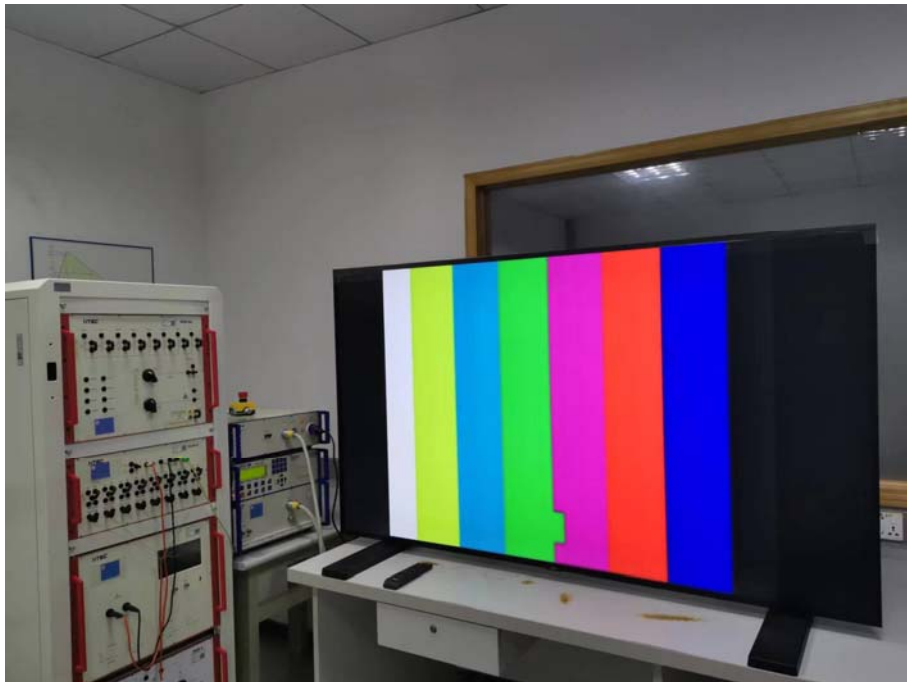

6.9.Set-up for Electrical Fast Transient/Burst Immunity Test



(AC Port)



(Signal Port)

6.10.Set-up for Injected Currents Susceptibility Test



AC Port



Signal Port

6.11.Set-up for Voltage Dips and Short Interruptions Immunity Test



7. PHOTOGRAPHS OF THE EUT

M/N: E758

Figure 1

General Appearance of the EUT



Figure 2

General Appearance of the EUT



Figure 3
General Appearance of the EUT



Figure 4
General Appearance of the EUT

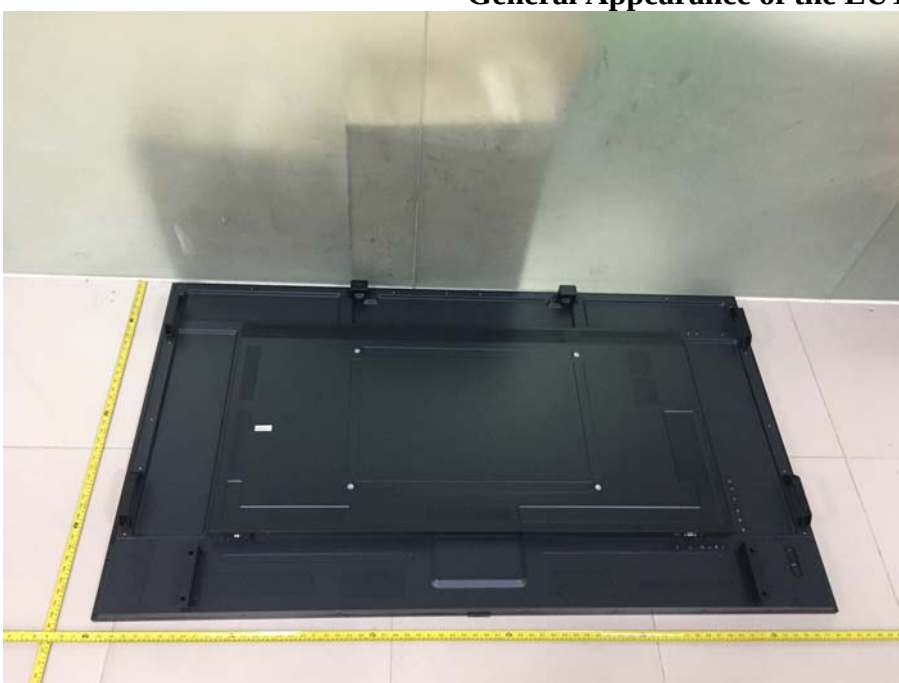


Figure 5
General Appearance of the EUT



Figure 6
General Appearance of the EUT



Figure 7
Inside View of the EUT



Figure 8
Inside View of the EUT



Figure 9
Inside View of the EUT



Figure 10
Inside View of the EUT



Figure 11
General Appearance of the EUT



Figure 12
General Appearance of the EUT



End of Test Report