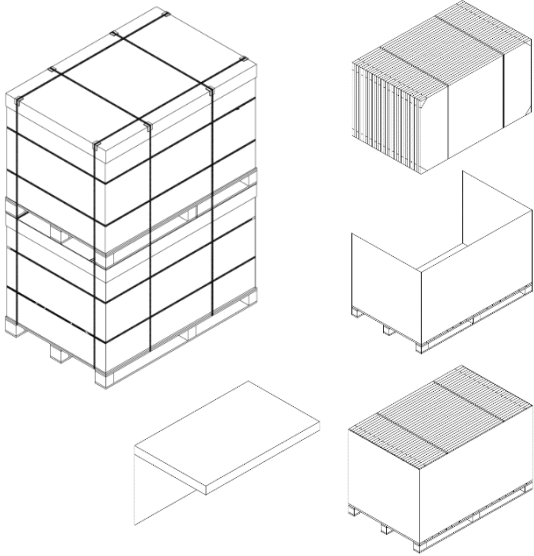


Pallet and Packaging information SHARP PV Modules

Applicable to the following 108 cell module types: **NU-JC400B, NU-JC410**

Pallet Size		Delivery Information		Name of Packing	Material	Weight
Length Width	1,754 mm 1,125 mm	Modules per pallet	31 pcs	Packing Carton	Corrugated paper	9.0 kg
Height single stack	1,245 mm	Modules per truck (40 feet)	806 pcs	Pallet	Plywood	17.0 kg
Height double stack	2,490 mm	Pallets per truck (40 feet)	26 pcs	Plastic Strap	PET	1.984 kg
Single stack weight (pallet + modules)	700 kg	Module direction on pallet	upright on long side	Plastic Wrap	PEL5D98	1.271 kg
Double stack weight (pallets + modules)	1,400 kg					

Pallet Side View (Double Stack)		Storage And Transportation	
		Max. Stacking for storage	2 pallets
		Max. Stacking for transportation	2 pallets

Shipment Data Sheet

SHIPMENT DATA SHEET					
PALLET: Y219057F014					
PACKING DATE		: 2021-09-24			
MODEL NO		: NU-JC400B			
NO.	SERIAL NO.	Pmax(W)	NO.	SERIAL NO.	Pmax(W)
16	Y219236F05170	xxx.x			
15	Y219236F05296	xxx.x	31	Y219236F05489	xxx.x
14	Y219236F05313	xxx.x	30	Y219236F05003	xxx.x
13	Y219236F05244	xxx.x	29	Y219236F05295	xxx.x
12	Y219236F05300	xxx.x	28	Y219236F05378	xxx.x
11	Y219236F05307	xxx.x	27	Y219236F05206	xxx.x
10	Y219236F04102	xxx.x	26	Y219236F05179	xxx.x
9	Y219236F04077	xxx.x	25	Y219236F05580	xxx.x
8	Y219236F04104	xxx.x	24	Y219236F05581	xxx.x
7	Y219236F04118	xxx.x	23	Y219236F05574	xxx.x
6	Y219236F05246	xxx.x	22	Y219236F05526	xxx.x
5	Y219236F05550	xxx.x	21	Y219236F05548	xxx.x
4	Y219236F05554	xxx.x	20	Y219236F05299	xxx.x
3	Y219236F05537	xxx.x	19	Y219236F05585	xxx.x
2	Y219236F04060	xxx.x	18	Y219236F05397	xxx.x
1	Y219236F04039	xxx.x	17	Y219236F05182	xxx.x

Label Information

SHARP		PHOTOVOLTAIC MODULE	
		MODEL : NU-JC400B	
MAXIMUM POWER (+5%/-0%)		(Pmax)	400W
OPEN-CIRCUIT VOLTAGE (+10%/-10%)		(Voc)	37.29V
SHORT-CIRCUIT CURRENT (+10%/-10%)		(Isc)	13.66A
VOLTAGE AT POINT OF MAX. POWER		(Vmpp)	30.92V
CURRENT AT POINT OF MAX. POWER		(Impp)	12.94A
NOTE: IRRADIANCE OF 1000W/m ² , AM1.5 SPECTRUM AND CELL TEMPERATURE OF 25°C			
		VDE APPROVED	
MAXIMUM SYSTEM VOLTAGE		1000V	
OVER-CURRENT PROTECTION		25A	
FIRE RESISTANCE CLASS		CLASS C	
(Acc. to IEC61730-2:2004)			
TYPICAL WEIGHT		21.8kg	
SHARP CORPORATION			
1 Takumi-cho, Sakai-ku, Sakai-shi, Osaka 590-8522, Japan			
EU	SHARP ELECTRONICS GmbH Nagelsweg 33-35, 20097 Hamburg, Germany		www.sharp.eu
IDENTIFICATION CODE : SERIAL NUMBER :			
			
			
MADE IN CHINA			

- Module No. 1 stands in a opposite orientation to the other modules on the pallet.
- Pallet documentation shows:
 - Module No.
 - Pallet serial number and barcode
 - Packing date
 - Module serial number and barcode
 - Electrical Power Pmax (W)
- EAN Code is not available