

A3 Colour Photocopiers

# SHARP BP-71C65




A smart A3 colour MFP with multi-layered security features and advanced environmental credentials, perfect for any modern office.


- 65ppm A3 colour MFP with seamless integration and connection to cloud based business process applications
- Multi-layered security features include automatic BIOS recovery if anomalies are detected during start-up and standard Trusted Platform Module to keep your confidential data secure
- Collaborate with ease using the Microsoft® Teams connector to print from or scan to your Microsoft® Teams channels directly from the MFP control panel
- Keep your data, device and network secure with optional Bitdefender anti-malware protection software<sup>[1]</sup>
- Bring more flexibility to your print output with an extensive range of finishing options including stapling, punching and folding
- A sustainable design uses up to 50% recycled plastics in manufacturing the base unit of the MFP and cardboard packaging
- helps reduce plastic waste
- Complete large jobs quickly and efficiently with scan speeds of up to 300ipm and optional double feed detection stops scanning when two or more sheets are fed at once<sup>[2]</sup>
- Advanced eco-technologies deliver an impressively low TEC value and standby power consumption rate
- With support for Microsoft Entra ID you can manage identities and control device access via a secure cloud-based tool
- Intuitive icons and a smartphone style interface on the 10.1-inch colour LCD control panel make operating the MFP smooth and easy
- Single sign-on lets you securely print from or scan to public cloud storage services quickly and easily
- Keep up-to-date and compliant with automatic online firmware and application updates via the Sharp Application Portal

[1] Bitdefender anti-malware protection software requires BP-VD10, [2] Double feed detection requires BP-DD10.

# Configurations

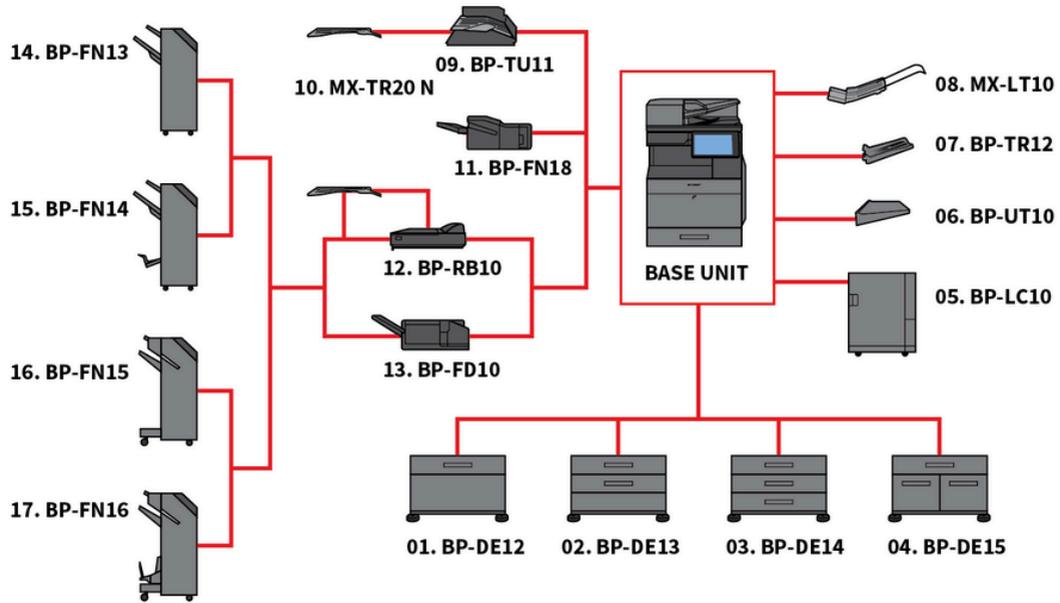

# Dimensions

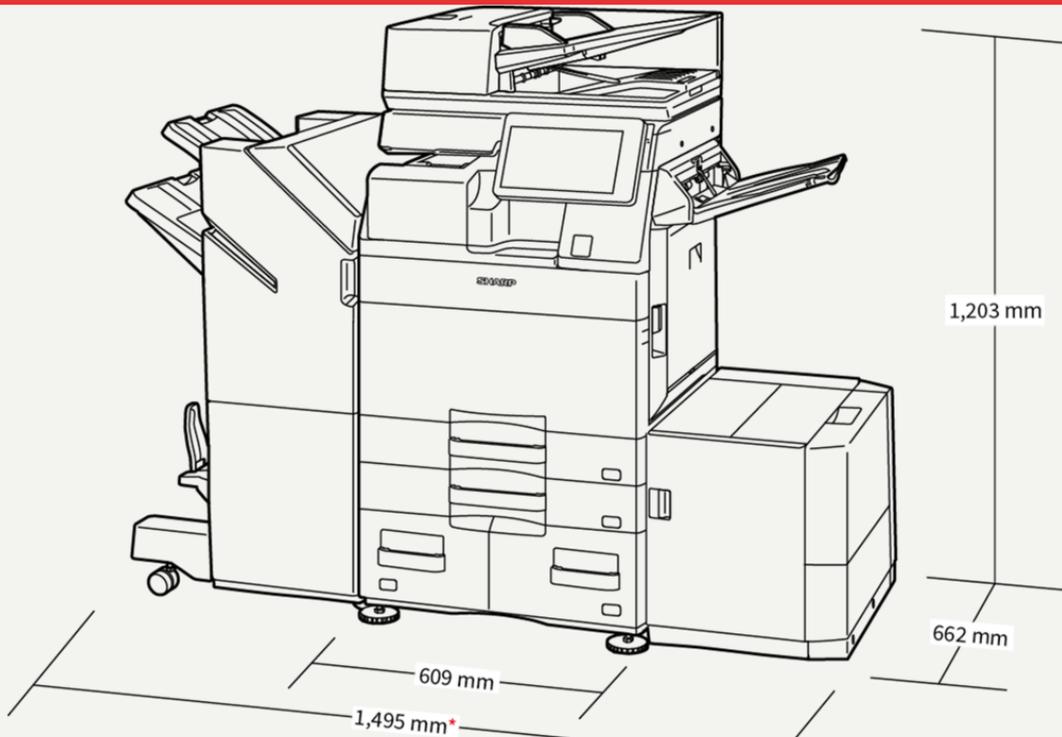

\* 1,648 mm when finisher tray and exit tray are extended.

# Options

## Storage

**BP-SD10 High Capacity SSD**  
512GB SSD

## Printing

**MX-PF10 Barcode Font Kit**  
Enables barcode printing

## Finishing

**MX-LT10 Long Paper Feeding Tray**  
Recommended for banner printing

**MX-PN15D Punch Module - 4 Hole Wide**  
Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

**MX-PN14D Punch Module - 4 Hole Wide**  
Punch module for BP-FN11/BP-FN12

**BP-FN14 1k Saddle Stitch Finisher**  
A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

**MX-PN16D Punch Module - 4 Hole Wide**  
Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

**MX-PN15C Punch Module - 2/4 Hole**  
Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

**MX-PN14C Punch Module - 2/4 Hole**  
Punch module for BP-FN11/BP-FN12

**BP-FN13 1k Finisher**  
A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Requires BP-RB10 Paper Pass Unit

**BP-FD10 Folding Unit**  
200 sheets (based on 80 g/m<sup>2</sup>), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m<sup>2</sup>

**MX-PN16C Punch Module - 2/4 Hole**  
Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

**BP-TR12 Exit Tray Unit**  
[empty]

**BP-RB10 Paper Pass Unit**  
Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

**BP-FN16 3k Saddle Stitch Finisher**  
A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max. 10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

**BP-FN15 3k Finisher**  
A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max. 10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>); Requires BP-RB10 Paper Pass Unit

**BP-FN18 Inner Finisher**  
A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity\*; Stapling capacity: max. 50-sheet multi-position staple\*; Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max. 10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>)

## Security

**BP-FR12U Data Security Kit**  
Commercial version

**BP-VD10 Virus Detection Kit**  
[empty]

## Sharp OSA

**MX-AMX1 Application Integration Module**  
[empty]

## Faxing

**MX-FWX1 Internet Fax Expansion Kit**  
[empty]

## Base Unit

**BP-LC10 Large Capacity Tray**  
3,000 sheets (based on 80 g/m<sup>2</sup>), A4-B5 (60-220 g/m<sup>2</sup>)

**BP-DE14 Stand with 3 x 550-sheet Paper Drawers**  
550 sheets each for lower and upper trays (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

**BP-UT10 Utility Table**  
[empty]

**BP-DE13 Stand with 2 x 550-sheet Paper Drawers**  
550 sheets each for lower and upper trays (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

**BP-DD10 Double Feed Detection Unit**  
Eliminates double feeding of paper while scanning

**BP-DE15 Stand with 550 + 2100-sheet Paper Drawers**  
Upper tray: SRA3-A5R, 550 sheets\* (60-300 g/m<sup>2</sup>); Lower tray (Left): A4, 1,200 sheets\* (60-105 g/m<sup>2</sup>); Lower tray (Right): A4 - B5, 900 sheets\* (60-105 g/m<sup>2</sup>); \* Number of sheets based on 80 g/m<sup>2</sup>

**BP-DE12 Stand with 550-sheet Paper Drawer**  
550 sheets (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

# Specifications

## General

Engine speed: A4 Colour (ppm)	65
Engine speed: A4 B/W (ppm)	65
Engine speed: A3 Colour (ppm)	33
Engine speed: A3 B/W (ppm)	33
Paper size: Min.	A6R
Paper size: Max.	SRA3
Paper weight: Min. (g/m <sup>2</sup> )	52
Paper weight: Max. (g/m <sup>2</sup> )	300
Paper capacity: Std. (sheets)	650
Paper capacity: Max. (sheets)	6300
Warm-up time (sec.)	13
Memory general: Max. (GB)	5
Storage: Std.	SSD
Storage: Opt.	SSD
SSD capacity: Std. (GB)	256
SSD capacity: Opt. (GB)	512
Duplex	Std.
Power requirements: Frequency Min. (Hz)	50
Power requirements: Frequency Max. (Hz)	60
Power consumption (kW)	1.84
Width (mm)	609
Depth (mm)	662
Height (mm)	860
Weight (kg)	85
Power Requirements: voltage Min. (V)	200
Power Requirements: voltage Max. (V)	240

## Fax

Fax	Opt.
Compression method	MH, MR, MMR, JBIG
Communication protocol	Super G3, G3
Transmission time (sec.)	2
Modem speed: Min. (bps)	2400
Modem speed: Max. (bps)	33600
Transmission resolution: Std (dpi)	203.2 x 97.8 dpi
Transmission resolution: Ultra Fine (dpi)	406.4 x 391 dpi
Document size: Min.	A5
Document size: Max.	A3
Memory: Max. (GB)	4
Grey scale (levels)	256
Dial registration: rapid/speed dial	2000
Broadcast transmission (Max. destinations)	500

## Wireless Lan

Wireless LAN	Std.
Compliant regulation	IEEE802.11a/ac/b/g/n
Access mode	Infrastructure mode, Software AP mode
Security	WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, WPA3 EAP

## Print

Network printer	Std.
Resolution (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Interface: Std.	USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T
Supported OS: Std.	Windows 10, Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows Server 2025, Mac OS X 10.15, Mac OS X 11, Mac OS X 12, Mac OS X 13, Mac OS X 14, Mac OS X 15
Network protocols	TCP/IP (IPv4, IPv6)
Printing protocols	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FPT for downloading print files, IPP, SMB, WSD
Available Fonts	80 PCL, 139 PostScript 3

## Copy

Original paper size: Max.	A3
First copy out time: Colour (sec.)	4.8
First copy out time: B/W (sec.)	3.7
E-sort	Opt.
Continuous copy (Max. copies)	9999
Scan resolution: B/W (dpi)	600 x 600, 600 x 400, 600 x 300
Scan resolution: Colour (dpi)	600 x 600
Print resolution (dpi)	1200 x 1200, 600 x 600, 9600 x 600
Gradation: Colour (equivalent levels)	256
Zoom range: Min. (%)	25
Zoom range: Max. (%)	400
Preset copy ratios	10
Scan method	Push scan, Pull scan

## Scan

Network scanner	Std.
Push scan resolution (dpi)	100, 150, 200, 300, 400, 600
Pull scan resolution (dpi)	75, 100, 150, 200, 300, 400, 600, 50-9600
File formats: Std.	TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RFT)
Scan destinations	Desktop, FTP, Email, Network folder, USB

## File

Document filing	Std.
Stored jobs	Copy, Print, Scan, Fax transmission
Storage folders	Quick file, Main, Custom
Confidential storage	False

## Finish

Output capacity: Min. (sheets)	500
Output capacity: Max. (sheets)	3250
Staple capacity: Max. (sheets)	65
Saddle stitch	Opt.
Off-set shifting	Std.
Hole punch	Opt.

## Toner Yield

Black (pages at 5% coverage)	40000
Cyan (pages at 5% coverage)	24000
Magenta (pages at 5% coverage)	24000
Yellow (pages at 5% coverage)	24000

